

PASSION FOR COOLING

At TEFCOLD, we are growing and during the past 8 years, we have welcomed 9 new companies into the TEFCOLD Group. Every step we take to grow our business is for one simple reason: to better serve you, our valued customers. Our goal is to ensure we can always provide you with the right products, top-notch service, and quick delivery times all over Europe.

In this catalogue, you are invited to explore our extensive selection of commercial cooling and freezing solutions. We have packed it with options to suit any business need, big or small. Dive in and discover what we have to offer.

"Global Reach, Local Touch"





ALWAYS HERE TO HELP

Choose the best products for your business with help from our dedicated sales team.



CREATE A "WOW" EFFECT

Make your products stand out with unique customized branding. We can print and apply your design to any of the freezers and coolers in this catalogue.



ENJOY SPEEDY DELIVERY

With over 70.000 units in stock, experience our quick process for branding, delivery, and distribution complete with great customer service.





WARRANTY OPTIONS

You can choose from a number of different warranty options covering spare parts only or service and spare parts. Together, we will find the best match for your business.



RESPONSIVE AFTER SALES SERVICE

Our high-quality products and trusted logistics partners mean you get a great experience from the start, but we also know that it's good to have someone to turn to in the future too. Based on the warranty you've selected our service team is here to help, should you need any support.



LET'S MAKE IT EASY FOR YOU

Behind our B2B web shop login, an entire universe of possibilities unfolds, designed to streamline your experience and empower your business operations.


Imagine opening a platform that gives you access to everything you need, all in one place.

SMOOTH ONLINE ORDERING

Find all the products you need, complete with your agreed prices and warranties, and real time stock info.

COOL FEATURES

Compare different products, create offers for your customers, or calculate freight costs – we have gone out of our way to make it easy for you.

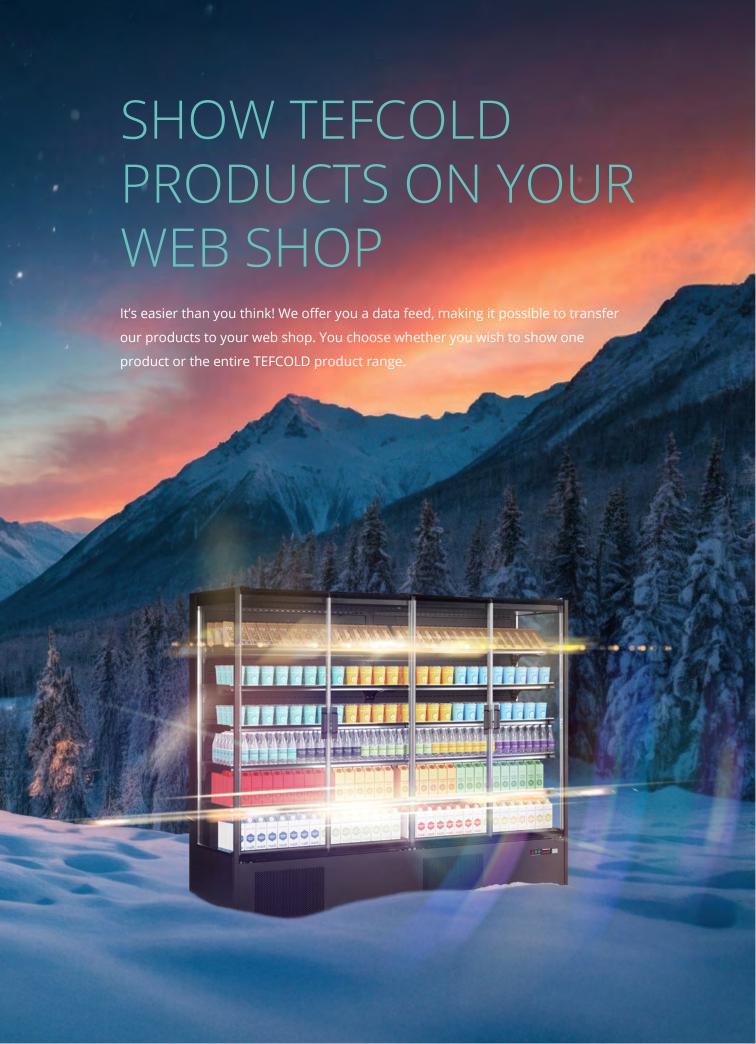



BRANDING

Transform your new coolers and freezers into tailor-made brand ambassadors! We produce vibrant, high-quality, long-lasting graphics that capture the imagination of your customers. Perfect for promoting your brand and encouraging customers to spread the word.

We do everything in-house, allowing us to fully control all aspects of the process. This means you experience an elevated level of quality and clear communication, whilst benefiting from cost reductions too. From the design, production, and application right through to the packaging and delivery to your site, we're here to help every step of the way.

STEP 1 HELP AND GUIDANCE

Take full advantage of our industry experience. We are always happy to provide you with advice. We work with you to deliver the most effective branding options for your new products, both in terms of cost and impact for your customers.

STEP 3 PRINTING AND APPLICATION

Leave the rest up to our skilled branding team, who will expertly apply your design onto your cabinets.

STEP 2 ARTWORK PREPARATION

Once you've created your artwork send this to us and we will prepare it for printing. If you need any help with the design just let us know.



1 DISPLAY COOLERS

- BACKBARS & KEG COOLERS
- DISPLAY COOLERS
- TABLETOP COOLERS
- MINIBARS
- WINE COOLERS
- CAN COOLERS
- ISLAND COOLERS
- 89 REFRIGERATED GLASS CABINETS
- SERVE OVER COUNTERS
- MULTIDECKS

2 STORAGE COOLERS

- CHEST COOLERS
- UPRIGHT STORAGE COOLERS

FREEZERS / COOLERS

- IMPULSE CABINETS
- SUPERMARKET UNITS
- 139 WALL UNITS

4 FREEZERS

- TABLETOP FREEZERS
- UPRIGHT DISPLAY FREEZERS
- MULTIDECKS
- SUPERMARKET FREEZERS
- HORIZONTAL FREEZERS
- UPRIGHT STORAGE FREEZERS

5 ICE CREAM FREEZERS

- TABLETOP ICE CREAM FREEZERS
- ICE CREAM FREEZERS DISPLAY
- SCOOPING FREEZERS STATIC
- SCOOPING FREEZERS VENTILATED

6 COLD ROOMS

- 221 COLD ROOMS
- FREEZER ROOMS

GASTRO

- BLAST CHILLERS
- 231 COOLING WELLS
- COUNTERS
- UNDER COUNTERS
- UPRIGHT CABINETS
- G-LINE






DB Backbars







DB301S-3

Backbar Cooler

- Approx. 56% more energy efficient than previous DB-range
- Double glazed tempered glass
- Energy saving variable speed compressor
- Ventilated cooling for fast pull-down and even temperature
- Easy access electronic thermostat
- · Adjustable shelves
- LED interior light





Protective thermostat cover



Door holder for loading of the cabinet

Description

The DB range of backbars comes with 1, 2, or 3 doors with double glazed tempered glass. Choose between sliding doors or hinged doors. The backbar cooler has a black exterior, a stucco aluminium interior, and white plastic-coated wire shelves for easy maintenance. It has ventilated cooling, easily controlled by an electronic thermostat. Ideal for busy bar environments.


The new range of backbars is highly energy efficient and uses in average 56% less energy compared to the previous models from the same range.





DB126H

Backbar Cooler



- Double glazed tempered glass
- Energy saving variable speed compressor
- Ventilated cooling for fast pull-down and even temperature
- Easy access electronic thermostat
- Adjustable shelves
- LED interior light






112

DB201H

Backbar Cooler



- Double glazed tempered glass
- Energy saving variable speed compressor
- Ventilated cooling for fast pull-down and even temperature
- Easy access electronic thermostat
- Adjustable shelves
- LED interior light





		DB106H	DB126H	DB201H	DB201S	DB301H-3	DB301S-3
Total Display Area	m²	0,29	0,35	0,5	0,47	0,75	0,72
Door No & Type		1 hinged glass	1 hinged glass	2 hinged glass	2 sliding glass	3 hinged glass doors	3 sliding glass doors
Door Reversible		Yes	No	No	No	No	No
Shelves No & Type		2 wire shelves	2 wire shelves	4 wire shelves	4 wire shelves	6 wire shelves white	6 wire shelves white
Shelf Color		White	White	White	White	White	White
Shelf Dimensions		395x350 mm	495x350 mm	395x320 mm	395x320 mm	395x320 mm /	395x320 mm /
Max load on Shelves	kg/m²	196	196	196	196	196	196
Temperature Range	°C	+2 to +10	+2 to +10				
Climate Class		4	4	4	4	4	4
Gross / Net Weight	kg	45 / 40	52 / 46	69 / 63	69 / 63	95 / 88	95 / 88
Gross / Net Volume	1	105 / 92	125 / 115	190 / 182	190 / 182	300 / 278	300 / 278
Feet / Legs		4 adjustable feet	4 adjustable feet				
Exterior Finish		Black	Black	Black	Black	Black	Black
Interior Finish		Stucco aluminium	Stucco aluminium				
Interior Light		LED	LED	LED	LED	LED	LED
Lock		Yes	Yes	Yes	Yes	Yes	Yes
Type of Controller		Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
Refrigerant		R600a	R600a	R600a	R600a	R600a	R600a
Refrigerant Charge	g	45	55	70	70	90	90
Thermometer		Yes	Yes	Yes	Yes	Yes	Yes
Energy Class		Α	Α	Α	Α	В	В
Max Ambient		30°C at 55% RH	30°C at 55% RH				
Energy Consumption	kWh/24h	0,85	0,96	1,08	1,14	1,8	1,74
Annual Energy Cons.	kWh/year	310	350	394	416	657	635
Power Supply		13 Amp	13 Amp				
Input Power	W	95	95	115	115	125	125
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	44	44	44	44	44	44
Internal Dimension (WxDxH)	mm	410 x 418 x 720	510 x 418 x 720	810 x 418 x 720	810 x 418 x 720	1265 x 418 x 720	1265 x 418 x 720
External Dimension (WxDxH)	mm	500 x 520 x 870	600 x 520 x 870	900 x 520 x 870	900 x 520 x 870	1350 x 520 x 870	1350 x 526 x 870
Packed Dimension (WxDxH)	mm	585 x 575 x 940	685 x 575 x 940	985 x 575 x 940	985 x 575 x 940	1435 x 575 x 940	1435 x 575 x 940
40ft Container Load	pcs	160	136	96	96	64	64

BA Backbars - Height 87 cm





DID YOU KNOW?

Our BA backbars are offered with both 87 and 90 cm height and with sliding or hinged doors – all with double glazed glass doors.




BA26H

Backbar Cooler

- EU Energy Class A
- Approx. 59% more energy efficient than previous BA-range
- Ventilated cooling for fast pull-down and even temperature
- Energy saving variable speed compressor
- Double glazed tempered glass
- Hinged alu-framed glass doors
- Easy access electronic thermostat
- · Adjustable shelves behind each door
- LED interior light
- Lock







Electronic thermostat

Description

The BA is a range of high-quality backbars. It features aluminium doors and chrome shelves with closely-spaced wires, to give stability and high capacity. Double glazed glass doors offer great product visibility as well as a lower energy consumption. It is available with 1, 2, and 3 doors – choose between hinged or sliding doors. To ensure that the backbar fits into any bar environment, it comes in two heights: 870 mm and 900 mm.

The new range of backbars is highly energy efficient and uses in average 59% less energy compared to the previous models from the same range.





BA6H

Backbar Cooler

- EU Energy Class A
- Approx. 59% more energy efficient than previous BA-range
- Double glazed tempered glass
- Reversible glass door
- Ventilated cooling for fast pull-down and even temperature
- Easy access electronic thermostat
- Adjustable shelves
- LED interior light



BA16H

Backbar Cooler

- EU Energy Class A
- Approx. 59% more energy efficient than previous BA-range
- Double glazed tempered glass
- Reversible glass door
- Ventilated cooling for fast pull-down and even temperature
- Easy access electronic thermostat
- Adjustable shelves
- LED interior light







• Lock		113	96 70 70 • L	-ock		161 112 84 84
		BA16H	ВА26Н	BA26S	BA26SS	ВА6Н
Total Display Area	m²	0,35	0,5	0,52	0,52	0,29
Door No & Type		1 hinged glass door	2 hinged glass doors	2 sliding glass doors	2 sliding glass doors	1 hinged glass door
Door Reversible		Yes	No	No	No	Yes
Shelves No & Type		2 wire shelves chrome	4 wire shelves chrome	4 wire shelves chrome	4 wire shelves chrome	2 wire shelves chrome


Door No & Type		1 hinged glass door	2 hinged glass doors	2 sliding glass doors	2 sliding glass doors	1 hinged glass door
Door Reversible		Yes	No	No	No	Yes
Shelves No & Type		2 wire shelves chrome	4 wire shelves chrome	4 wire shelves chrome	4 wire shelves chrome	2 wire shelves chrome
Shelf Color		Chrome	Chrome	Chrome	Chrome	Chrome
Shelf Dimensions		495x350 mm	395x328 mm	395x328 mm	395x330 mm	395x350 mm
Temperature Range	°C	+2 to +10				
Climate Class		4	4	4	4	4
Gross / Net Weight	kg	52 / 46	69 / 63	69 / 63	77 / 72	45 / 40
Gross / Net Volume	I	125 / 115	190 / 182	190 / 182	191 / 183	105 / 92
Feet / Legs		4 adjustable feet				
Exterior Finish		Black	Black	Black	Stainless steel	Black
Interior Finish		Stucco aluminium				
Interior Light		LED	LED	LED	LED	LED
Lock		Yes	Yes	Yes	Yes	Yes
Type of Controller		Electronic	Electronic	Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic	Automatic	Automatic
Refrigerant		R600a	R600a	R600a	R600a	R600a
Refrigerant Charge	g	55	70	70	70	45
Thermometer		Yes	Yes	Yes	Yes	Yes
Energy Class		A	A	A	A	A
Max Ambient		30°C at 55% RH				
Energy Consumption	kWh/24h	0,96	1,08	1,14	1,14	0,85
Annual Energy Cons.	kWh/year	350	394	416	416	310
Power Supply		13 Amp				
Input Power	W	95	115	115	115	95
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	44	44	44	45	44
Internal Dimension (WxDxH)	mm	510 x 418 x 720	810 x 418 x 720	810 x 418 x 720	810 x 345 x 720	410 x 418 x 720
External Dimension (WxDxH)	mm	600 x 520 x 870	900 x 520 x 870	900 x 515 x 870	900 x 515 x 870	500 x 520 x 870
Packed Dimension (WxDxH)	mm	685 x 575 x 940	985 x 575 x 940	985 x 575 x 940	1000 x 600 x 950	585 x 575 x 940
40ft Container Load	pcs	136	96	96	96	160

DISPLAY COOLERS BA Backbars

BA Backbars - Height 90 cm








BA31H

Backbar Cooler

- EU Energy Class B
- Approx. 59% more energy efficient than previous BA-range
- Ventilated cooling for fast pull-down and even temperature
- Energy saving variable speed compressor
- · Double glazed tempered glass
- Hinged alu-framed glass doors
- Easy access electronic thermostat
- Adjustable shelves behind each door
- LED interior light
- Lock









Electronic thermostat

Description

The BA is a range of high-quality backbars. It features aluminium doors and chrome shelves with closely-spaced wires, to give stability and high capacity. Double glazed glass doors offer great product visibility as well as a lower energy consumption. It is available with 1, 2, and 3 doors – choose between hinged or sliding doors. To ensure that the backbar fits into any bar environment, it comes in two heights: 870 mm and 900 mm.

The new range of backbars is highly energy efficient and uses in average 59% less energy compared to the previous models from the same range.





BA11H

Backbar Cooler

- EU Energy Class A
- Approx. 59% more energy efficient than previous BArange
- Double glazed tempered glass
- Reversible glass door
- Ventilated cooling for fast pull-down and even temperature
- Easy access electronic thermostat
- Adjustable shelves
- LED interior light
- Lock



161 112

96

BA21H


Backbar Cooler

- EU Energy Class A
- Approx. 59% more energy efficient than previous BArange
- Ventilated cooling for fast pull-down and even temperature
- Energy saving variable speed compressor
- Double glazed tempered glass
- Hinged alu-framed glass doors
- Easy access electronic thermostat
- · Adjustable shelves behind each door
- LED interior light
- Lock









				JOCK		
		BA11H	BA21H	BA21S	BA31H	BA31S-3
Total Display Area	m²	0,37	0,52	0,54	0,77	0,84
Door No & Type		1 hinged glass door	2 hinged glass doors	2 sliding glass doors	3 hinged glass doors	3 sliding glass doors
Door Reversible		Yes	No	No	No	No
Shelves No & Type		2 wire shelves chrome	4 wire shelves chrome	4 wire shelves chrome	6 wire shelves chrome	6 wire shelves chrome
Shelf Color		Chrome	Chrome	Chrome	Chrome	Chrome
Shelf Dimensions		495x350 mm	395x328 mm	395x328 mm	400x318 / 432x318 mm	400x318 / 432x318 mm
Temperature Range	°C	+2 to +10				
Climate Class		4	4	4	4	4
Gross / Net Weight	kg	53 / 47	70 / 64	70 / 64	99 / 92	101 / 94
Gross / Net Volume	I	128 / 118	196 / 188	196 / 188	311 / 288	311 / 288
Feet / Legs		4 adjustable feet				
Exterior Finish		Black	Black	Black	Black	Black
Interior Finish		Stucco aluminium				
Interior Light		LED	LED	LED	LED	LED
Lock		Yes	Yes	Yes	Yes	Yes
Type of Controller		Electronic	Electronic	Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic	Automatic	Automatic
Refrigerant		R600a	R600a	R600a	R290	R290
Refrigerant Charge	g	55	70	70	90	90
Thermometer		Yes	Yes	Yes	Yes	Yes
Energy Class		Α	A	A	В	В
Max Ambient		30°C at 55% RH				
Energy Consumption	kWh/24h	0,96	1,08	1,14	1,8	1,74
Annual Energy Cons.	kWh/year	350	394	416	657	635
Power Supply		13 Amp				
Input Power	W	95	115	115	125	125
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	44	44	44	44	44
Internal Dimension (WxDxH)	mm	510 x 418 x 734	810 x 418 x 734	810 x 418 x 734	1265 x 418 x 734	1265 x 418 x 734
External Dimension (WxDxH)	mm	600 x 520 x 900	900 x 520 x 900	900 x 515 x 900	1350 x 520 x 900	1350 x 515 x 900
Packed Dimension (WxDxH)	mm	685 x 575 x 970	985 x 575 x 970	985 x 575 x 970	1435 x 575 x 970	1435 x 575 x 970
40ft Container Load	pcs	136	96	96	64	64

display coolers CBC-G Backbars





CBC410GBackbar Cooler

- Robust heavy duty equipment
- Self-closing glass doors
- Mirror effect stainless steel interior
- Adjustable SS304 steel shelves
- Adjustable feet
- Ventilated cooling







Lock

Adjustable shelves

Description

The CBC is a range of robust 'heavy duty' backbars. It has adjustable shelves made from SS304 stainless steel. It comes with 2, 3, or 4 hinged self-closing doors, solid or in glass. The backbar has an efficient ventilated cooling system for a short pull-down time, which is ideal for busy bar environments.





CBC210G

Backbar Cooler

- Robust heavy duty equipment
- Self-closing glass doors
- Mirror effect stainless steel interior
- Adjustable SS304 steel shelves
- Adjustable feet
- Ventilated cooling

CBC310G

Backbar Cooler



- Robust heavy duty equipment
- Self-closing glass doors
- Mirror effect stainless steel interior
- Adjustable SS304 steel shelves
- Adjustable feet
- Ventilated cooling

		CBC210G	CBC310G	CBC410G
Total Display Area	m²	0,56	0,84	1,12
Door No & Type		2 hinged self-closing glass doors	3 hinged self-closing glass doors	4 hinged self-closing glass doors
Door Reversible		No	No	No
Shelves No & Type		4 SS304 shelves	6 SS304 shelves	8 SS304 shelves
Shelf Color		SS304	SS304	SS304
Temperature Range	°C	+2 to +10	+2 to +10	+2 to +10
Climate Class		4	4	4
Gross / Net Weight	kg	123 / 118	143 / 138	172 / 167
Gross / Net Volume	I	290 / 277	460 / 442	630 / 605
Feet / Legs		6 adjustable feet	8 adjustable feet	10 adjustable feet
Exterior Finish		Black	Black	Black
Interior Finish		SS430 mirror polished	SS430 mirror polished	SS430 mirror polished
Interior Light		LED	LED	LED
Lock		Yes	Yes	Yes
Type of Controller		Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic
Refrigerant		R290	R290	R290
Refrigerant Charge	g	95	95	95
Thermometer		Yes	Yes	Yes
Energy Class		С	С	С
Energy Consumption	kWh/24h	3,18	3,8	4,08
Annual Energy Cons.	kWh/year	1159	1386	1489
Input Power	W	250	250	320
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	42	42	42
Internal Dimension (WxDxH)	mm	1082 x 415 x 760	1622 x 415 x 760	2162 x 415 x 760
External Dimension (WxDxH)	mm	1462 x 513 x 860	2002 x 513 x 860	2542 x 513 x 860
Packed Dimension (WxDxH)	mm	1540 x 580 x 1050	2060 x 580 x 1050	2650 x 580 x 1050
40ft Container Load	pcs	60	44	32

1 DISPLAY COOLERS CBC Backbars





CBC410Backbar Cooler

- Robust heavy duty equipment
- Self-closing doors
- Stainless steel interior
- Adjustable SS304 steel shelves
- Adjustable feet
- Ventilated cooling
- Drawers as option










Adjustable shelves

Description

The CBC is a range of robust 'heavy duty' backbars. It has adjustable shelves made from SS304 stainless steel. It comes with 2, 3, or 4 hinged self-closing doors, solid or in glass. The backbar has an efficient ventilated cooling system for a short pull-down time, which is ideal for busy bar environments.



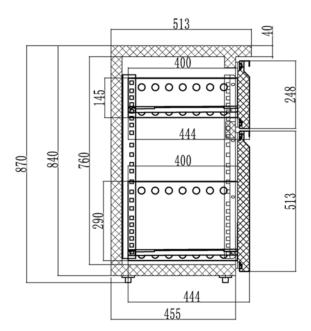

CBC210

Backbar Cooler

- Robust heavy duty equipment
- Self-closing doors
- Stainless steel interior
- Adjustable SS304 steel shelves
- Adjustable feet
- Ventilated cooling
- Drawers as option

CBC310

C G

Backbar Cooler



- Robust heavy duty equipment
- Self-closing doors
- Stainless steel interior
- Adjustable SS304 steel shelves
- Adjustable feet
- Ventilated cooling
- Drawers as option

• Drawers as opt	ion		 Drawers as option 	
		CBC210	CBC310	CBC410
Door No & Type		2 hinged self-closing doors	3 hinged self-closing doors	4 hinged self-closing doors
Door Reversible		No	No	No
Shelves No & Type		4 SS304 shelves	6 SS304 shelves	8 SS304 shelves
Shelf Color		SS304	SS304	SS304
Temperature Range	°C	+2 to +10	+2 to +10	+2 to +10
Climate Class		4	4	4
Gross / Net Weight	kg	123 / 118	143 / 138	172 / 167
Gross / Net Volume	I	290 / 277	460 / 442	630 / 605
Feet / Legs		6 adjustable feet	8 adjustable feet	10 adjustable feet
Exterior Finish		Black	Black	Black
Interior Finish		SS430 mirror polished	SS430 mirror polished	SS430 mirror polished
Interior Light		No	No	No
Lock		Yes	Yes	Yes
Type of Controller		Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic
Refrigerant		R290	R290	R290
Refrigerant Charge	g	95	95	95
Thermometer		Yes	Yes	Yes
Energy Class		С	С	С
Energy Consumption	kWh/24h	2,35	2,85	3,18
Annual Energy Cons.	kWh/year	858	1040	1160
Input Power	W	250	250	350
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	42	42	42
Internal Dimension (WxDxH)	mm	1082 x 415 x 760	1622 x 415 x 760	2162 x 415 x 760
External Dimension (WxDxH)	mm	1462 x 513 x 860	2002 x 513 x 860	2542 x 513 x 860
Packed Dimension (WxDxH)	mm	1540 x 580 x 1050	2060 x 580 x 1050	2650 x 580 x 1050
40ft Container Load	pcs	60	44	32




CKC8 KEG Cooler

- Self-closing doors
- Stainless steel interior
- Adjustable feet
- Ventilated cooling
- Suitable for 20 I KEGs









Easy access to clean condenser

Description

The CKC range of KEG coolers comes in several sizes, fitting between 2-8 x 20 liter KEGS. It has a black exterior and a stainless steel interior. It has ventilated cooling to ensure a fast pull-down time and the temperature can easily be adjusted on the electronic thermostat. A great choice for busy bar environments serving draft beer.



CKC2


KEG Cooler


- Self-closing door
- Stainless steel interior
- Adjustable feet
- Ventilated cooling
- Suitable for 20 l KEGs



CKC4

KEG Cooler







- Ventilated cooling
- Suitable for 20 I KEGs





		CKC2	CKC4	CKC6	CKC8
20 KEG	pcs	2	4	6	8
50 I KEG	pcs	0	1	1	2
Door No & Type		1 hinged solid door	1 hinged solid door	2 hinged solid doors	2 hinged solid doors
Door Reversible		No	No	No	No
Temperature Range	°C	+2 to +10	+2 to +10	+2 to +10	+2 to +10
Climate Class		4	4	4	4
Gross / Net Weight	kg	58 / 53	74 / 69	86 / 81	96 / 91
Gross / Net Volume	I	99 / 98	190 / 189	268 / 267	362 / 359
Feet / Legs		4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Exterior Finish		Black	Black	Black	Black
Interior Finish		SS430 mirror polished	SS430 mirror polished	SS430 mirror polished	SS430 mirror polished
Interior Light		No	No	No	No
Lock		No	No	No	No
Type of Controller		Electronic	Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic	Automatic
Refrigerant		R600a	R600a	R600a	R600a
Refrigerant Charge	g	60	95	95	95
Thermometer		Yes	Yes	Yes	Yes
Energy Class		В	В	В	В
Energy Consumption	kWh/24h	1,92	2,12	2,17	2,52
Annual Energy Cons.	kWh/year	701	774	792	920
Input Power	W	160	240	240	250
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	45	45	45	45
Internal Dimension (WxDxH)	mm	270 x 500 x 730	520 x 500 x 730	735 x 500 x 730	990 x 500 x 730
External Dimension (WxDxH)	mm	555 x 590 x 860	880 x 590 x 860	1110 x 590 x 860	1350 x 590 x 860
Packed Dimension (WxDxH)	mm	600 x 620 x 1050	925 x 620 x 1050	1200 x 620 x 1050	1400 x 620 x 1050
40ft Container Load	pcs	114	86	74	52

DISPLAY COOLERS

Undercounter Bottle Coolers








Internal fan



BC145 W/FAN

Bottle Cooler

- Curved reversible glass door
- Fan assisted cooling
- LED interior light
- Hinged glass door
- Adjustable shelves
- Adjustable feet



Description

The BC undercounter range of bottle coolers comes in two sizes and offers great product visibility. It has a curved reversible glass door with an integrated handle. The cooler comes with adjustable wire shelves, which makes it easy to fit the interior to your specific needs. Fan-assisted cooling ensures an even temperature in the cabinet.




DID YOU KNOW?

These BC undercounters are with a reversible, curved glass door.

BC85 w/Fan

Bottle Cooler





- LED interior light
- Hinged glass door
- Adjustable shelves
- Adjustable feet
- Digital temperature display







\bigcap			
33 cl	50 cl	33 cl	50
93	68	43	43

BC145 W/FAN 1 hinged curved glass door Yes 3 wire shelves white White 410 x 353 mm 196 +2 to +10	BC85 w/Fan 1 hinged curved glass door Yes 3 wire shelves white White 410 x 353 mm 196
Yes 3 wire shelves white White 410 x 353 mm 196	Yes 3 wire shelves white White 410 x 353 mm
3 wire shelves white White 410 x 353 mm 196	3 wire shelves white White 410 x 353 mm
White 410 x 353 mm 196	White 410 x 353 mm
410 x 353 mm 196	410 x 353 mm
196	
	+2 to +10
	4
	38 / 33
	92 / 85
•	4 adjustable feet White
	ABS
	LED
	Yes
	Mechanical
	Fan assisted
	Automatic
R600a	R600a
28	28
Yes	Yes
D	C
30°C 55% RH	30°C 55% RH
lh 0,98	1,06
ar 359	387
13 Amp	13 Amp
165	165
220-240/50	220-240/50
45	45
410 x 415 x 710	410 x 415 x 630
503 x 567 x 850	503 x 567 x 775
570 x 610 x 900	570 x 610 x 810
228	228
	4 41 / 36 109 / 105 4 adjustable feet White White ABS LED Yes Mechanical Fan assisted Automatic R600a 28 Yes D 30°C 55% RH 4h 0,98 2ar 359 13 Amp 165 220-240/50 45 410 x 415 x 710 503 x 567 x 850 570 x 610 x 900

DISPLAY COOLERS

CEV Black Bottle Coolers





Strong handle



LED light inside door frame

CEV435 BLACK

Black Bottle Cooler

- Approx. 40% more energy efficient than CEV425 Black
- Black interior and exterior
- Elegant design
- Great product presentation
- Extra shelf space
- LED light in door frame
- Adjustable shelves
- · Fan assisted cooling
- Reversible door (spare parts needed)

174

Lock









Description

cooler.

The CEV range is our bestselling range of bottle coolers. It has everything needed for displaying ice-cold beverages in the best possible way: a glass door with LED lighting on the inside of the door frame; adjustable shelves for flexibility; fan assisted cooling for an even temperature throughout the cabinet; and on top of that it is ideal for branding. It is standard available with right hinged doors as well as left hinged doors.



CEV425CP BLACK

Black bottle cooler

- Black interior and exterior
- Elegant design
- Great product presentation
- Illuminated canopy
- Ideal for branding
- LED light in door frame

D A G

213 174

- Adjustable shelves
- Fan assisted cooling
- Lock

357

231



CEV425 BLACK L/H

Bottle Cooler, Left Hinged

- Left hinged glass door
- Black interior and exterior
- Elegant design
- Great product presentation
- Extra shelf space
- LED light in door frame
- Adjustable shelves

357

231 213 174

Fan assisted cooling

D A G



		CEV425 BLACK	CEV425 BLACK L/H	CEV425CP BLACK	CEV435 BLACK	CEV435CP BLACK
Door No & Type		1 hinged glass door	1 left hinged glass door	1 hinged glass door	1 hinged glass door	1 hinged glass door
Door Reversible		Yes	Yes	Yes	Yes	Yes
Shelves No & Type		5 wire shelves black	5 wire shelves black	5 wire shelves black	5 wire shelves black	5 wire shelves black
Shelf Color		Black	Black	Black	Black	Black
Shelf Dimensions		490 x 360 mm	490 x 360 mm	490 x 360 mm	490 x 360 mm	490 x 360 mm
Max load on Shelves	kg/m²	196	196	196	196	196
Canopy Type				L-Shape		L-Shape
Temperature Range	°C	+2 to +10	+2 to +10	+2 to +10	+2 to +10	+2 to +10
Climate Class		4	4	4	4	4
Gross / Net Weight	kg	80 / 75	80 / 75	83 / 78	81 / 74	85 / 78
Gross / Net Volume	I	358 / 345	358 / 345	358 / 345	358 / 345	358 / 345
Feet / Legs		2 adjustable feet	2 adjustable feet	2 adjustable feet	2 adjustable feet	2 adjustable feet
Castors		2 rollers	2 rollers	2 rollers	2 rollers	2 rollers
Exterior Finish		Black	Black	Black	Black	Black
Interior Finish		Black ABS	Black ABS	Black ABS	Black ABS	Black ABS
Interior Light		LED inside door frame	LED inside door frame	LED inside door frame	LED inside door frame	LED inside door fram
Lock		Yes	Yes	Yes	Yes	Yes
Type of Controller		Mechanical	Mechanical	Mechanical	Electronic	Electronic
Type of Cooling		Fan assisted	Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost		Automatic	Automatic	Automatic	Automatic	Automatic
Refrigerant		R600a	R600a	R600a	R600a	R600a
Refrigerant Charge	g	70	70	70	70	70
Thermometer		Yes	Yes	Yes	Yes	Yes
Energy Class		D	D	D	С	С
Max Ambient		30°C at 55% RH	30°C at 55% RH	30°C at 55% RH	30°C at 55% RH	30°C at 55% RH
Energy Consumption	kWh/24h	2,2	2,2	2,25	1,54	1,57
Annual Energy Cons.	kWh/year	803	803	821	563	573
Power Supply		13 Amp	13 Amp	13 Amp	13 Amp	13 Amp
Input Power	W	295	295	295	370	370
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	45	45	45	55	55
Internal Dimension (WxDxH)	mm	470 x 440 x 1555	470 x 440 x 1555	505 x 462 x 1555	505 x 462 x 1555	505 x 462 x 1555
External Dimension (WxDxH)	mm	595 x 600 x 1840	595 x 600 x 1840	595 x 640 x 1980	595 x 640 x 1840	595 x 640 x 1980
Packed Dimension (WxDxH)	mm	665 x 710 x 2000	665 x 710 x 2000	665 x 715 x 2150	650 x 715 x 2050	650 x 715 x 2150
40ft Container Load	pcs	54	54	54	54	54

SCU Black Bottle Coolers





Frameless door



3 LEDs - Vertical and horizontally

SCU1425 FRAMELESS L/H

Bottle Cooler with Left Hand Hinged Door

- Left hinged glass door
- · Elegant design
- Frameless glass door
- Black interior and exterior
- Extra high glass door
- Great product presentation
- Internal vertical and horizontal LED light
- Fan assisted cooling









Description

glass door.

The SCU1425 range of bottle coolers takes affordable display refrigeration to a new level of quality. A black exterior and interior give it an elegant touch. The cooler has a frameless full-height glass door, adjustable shelves, and LED interior lighting for optimum product presentation. A fan assisted cooling system ensures even cooling over the whole cabinet. Comes as standard with a right hinged or left hinged door.




SCU1425 FRAMELESS

Black Display Cooler

- Frameless glass door
- Elegant design
- Black interior and exterior
- Extra high glass door
- Great product presentation
- Internal vertical and horizontal LED light
- Fan assisted cooling







SCU1425H

Black Display Cooler

- Elegant design
- Great product presentation
- Black interior and exterior
- Extra high glass door
- Hinged alu-framed glass door
- Internal vertical and horizontal LED light
- Fan assisted cooling





		SCU1425 FRAMELESS	SCU1425 FRAMELESS L/H	SCU1425H
Door No & Type		1 hinged glass door	1 left hinged glass door	1 hinged glass door
Door Reversible		No	No	No
Shelves No & Type		5 black sheet metal	5 black sheet metal	5 black sheet metal
Shelf Color		Black	Black	Black
Shelf Dimensions		492 x 405 mm	492 x 405 mm	492 x 405 mm
Max load on Shelves	kg/m²	196	196	196
Temperature Range	°C	+2 to +10	+2 to +10	+2 to +10
Climate Class		4	4	4
Gross / Net Weight	kg	97 / 86	97 / 86	97 / 86
Gross / Net Volume	I	387 / 347	387 / 347	387 / 347
Feet / Legs		2 adjustable feet	2 adjustable feet	2 adjustable feet
Castors		2 rollers	2 rollers	2 rollers
Exterior Finish		Black	Black	Black
Interior Finish		Black ABS	Black ABS	Black ABS
Interior Light		LED inside door frame	LED inside door frame	LED inside door frame
Lock		Yes	Yes	Yes
Type of Controller		Mechanical	Mechanical	Mechanical
Type of Cooling		Fan assisted	Fan assisted	Fan assisted
Type of Defrost		Automatic	Automatic	Automatic
Refrigerant		R600a	R600a	R600a
Refrigerant Charge	g	85	85	85
Thermometer		Yes	Yes	Yes
Energy Class		D	D	D
Max Ambient		30°C at 55% RH	30°C at 55% RH	30°C at 55% RH
Energy Consumption	kWh/24h	1,87	1,87	1,87
Annual Energy Cons.	kWh/year	683	683	683
Input Power	W	235	235	235
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	45	45	45
Internal Dimension (WxDxH)	mm	505 x 462 x 1742	505 x 462 x 1742	505 x 462 x 1742
External Dimension (WxDxH)	mm	595 x 595 x 1990	595 x 595 x 1990	595 x 595 x 1990
Packed Dimension (WxDxH)	mm	665 x 715 x 2150	665 x 715 x 2150	665 x 715 x 2150

DISPLAY COOLERS Slim Bottle Coolers









LED light inside door frame




Digital thermometer

FSC175H BLACK

Bottle Cooler

- · Black interior and exterior
- LED illuminated canopy
- Self-closing hinged glass door
- LED light in door frame
- Adjustable shelves
- · Fan assisted cooling
- · Internal stainless steel base
- Digital temperature display
- Fully automatic





Description

The FSC Slim range offers excellent build quality at a competitive price. The slim model has a hinged glass door and is available in white or black. You get great product presentation combined with a powerful refrigeration system, and the adjustable shelves add flexibility. The display cooler is ideal for branding and with the illuminated canopy at the top, it is sure to grab the attention of customers.



FS176H Black

Bottle Cooler

- Black interior and exterior
- Hinged glass door
- LED light in door frame
- Adjustable shelves
- Fan assisted cooling
- Internal stainless steel base
- Digital temperature display
- Fully automatic







100





FS176H

Bottle Cooler

- Great product presentation
- Hinged glass doors
- LED light in door frame
- Adjustable shelves
- Adjustable feet
- Fan assisted cooling
- Digital temperature display
- Fully automatic





200 120 100





100



		FS176H	FS176H Black	FSC175H	FSC175H BLACK
Door No & Type		1 hinged glass door	1 hinged glass door	1 hinged self-closing glass door	1 hinged self-closing glass door
Door Reversible		No	No	No	No
Shelves No & Type		5 wire shelves white	5 wire shelves black	5 wire shelves white	5 wire shelves black
Shelf Color		White	Black	White	Black
Shelf Dimensions		342 x 266	342 x 266	342 x 266	342 x 266
Max load on Shelves	kg/m²	196	196	196	196
Canopy Type		-	-	D-Shape	L-Shape
Temperature Range	°C	+2 to +10	+2 to +10	+2 to +10	+2 to +10
Climate Class		4	4	4	4
Gross / Net Weight	kg	70 / 64	70 / 64	70 / 64	70 / 64
Gross / Net Volume	I	182 / 114	182 / 114	182 / 114	182 / 114
Feet / Legs		2 adjustable feet	2 adjustable feet	2 adjustable feet	2 adjustable feet
Castors		2 rollers	2 rollers	2 rollers	2 rollers
Exterior Finish		White	Black	White	Black
Interior Finish		White	Black	White	Black
Interior Light		LED	LED	LED	LED
Lock		Yes	Yes	Yes	Yes
Type of Controller		Electronic	Electronic	Mechanical	Mechanical
Type of Cooling		Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost		Automatic	Automatic	Automatic	Automatic
Refrigerant		R600a	R600a	R600a	R600a
Refrigerant Charge	g	50	50	50	50
Thermometer		Yes	Yes	Yes	Yes
Energy Class		С	С	F	F
Max Ambient		30°C at 55% RH	30°C at 55% RH	30°C at 55% RH	30°C at 55% RH
Energy Consumption	kWh/24h	0,95	0,95	2,65	2,65
Annual Energy Cons.	kWh/year	347	347	967	967
Power Supply		13 Amp	13 Amp	13 Amp	13 Amp
Input Power	W	200	200	200	200
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	45	45	45	45
Internal Dimension (WxDxH)	mm	355 x 363 x 1410	355 x 363 x 1410	357 x 362 x 1410	357 x 362 x 1410
External Dimension (WxDxH)	mm	435 x 500 x 1833	435 x 500 x 1833	435 x 505 x 2013	435 x 505 x 2013
Packed Dimension (WxDxH)	mm	500 x 560 x 1990	500 x 560 x 1990	500 x 550 x 2060	500 x 550 x 2060
40ft Container Load	pcs	96	96	96	96

Display coolers Bottle Coolers







Our in-house branding team is happy to help make your products stand out and create "wow" effect. Contact our sales team to hear more.





Strong handle



LED light inside door frame

CEV425CP 2 LED

Bottle Cooler

- Great product presentation
- Illuminated canopy
- Ideal for branding
- LED light in door frame
- Adjustable shelves
- Fan assisted cooling
- Reversible door (spare parts needed)
- Digital temperature display
- Lock









Description

The CEV range is our bestselling range of bottle coolers. It has everything needed for displaying ice-cold beverages in the best possible way: a glass door with LED lighting on the inside of the door frame; adjustable shelves for flexibility; fan assisted cooling for an even temperature throughout the cabinet; and on top of that it is ideal for branding. It is standard available with right hinged doors as well as left hinged doors.



CEV425 1 LED

Bottle Cooler

- One of our bestsellers
- Great product presentation
- Ideal for branding
- LED light in door frame
- Adjustable shelves
- Adjustable feet
- Fan assisted cooling
- Reversible door (spare parts needed)
- Lock

357 231





213



CEV425 1 LED L/H

Bottle Cooler, Left Hinged

- Left hinged glass door
- Great product
- Ideal for branding
- LED light in door frame
- Adjustable shelves
- Adjustable feet

presentation

Fan assisted cooling





		CEV425 1 LED	CEV425 1 LED L/H	CEV425CP 2 LED	CEV425CP 2 LED L/H
Door No & Type		1 hinged glass door	1 left hinged glass door	1 hinged glass door	1 left hinged glass door
Door Reversible		Yes	Yes	Yes	Yes
Shelves No & Type		4 wire shelves white	5 wire shelves white	4 wire shelves white	4 wire shelves white
Shelf Color		White	White	White	White
Shelf Dimensions		490 x 360 mm	490 x 360 mm	490 x 360 mm	490 x 360 mm
Max load on Shelves	kg/m²	196	196	196	196
Canopy Type				D-Shape	D-Shape
Temperature Range	°C	+2 to +10	+2 to +10	+2 to +10	+2 to +10
Climate Class		4	4	4	4
Gross / Net Weight	kg	80 / 75	80 / 75	83 / 78	83 / 78
Gross / Net Volume	I	358 / 345	358 / 345	358 / 345	358 / 345
Feet / Legs		2 adjustable feet	2 adjustable feet	2 adjustable feet	2 adjustable feet
Castors		2 rollers	2 rollers	2 rollers	2 rollers
Exterior Finish		White	White	White	White
Interior Finish		White	White	White	White
Interior Light		LED inside door frame	LED inside door frame	LED inside door frame	LED inside door frame
Lock		Yes	Yes	Yes	Yes
Type of Controller		Mechanical	Mechanical	Mechanical	Mechanical
Type of Cooling		Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost		Automatic	Automatic	Off Cycle	Automatic
Refrigerant		R600a	R600a	R600a	R600a
Refrigerant Charge	g	70	70	70	70
Thermometer		Yes	Yes	Yes	Yes
Energy Class		D	D	D	D
Max Ambient		30°C 55% RH	30°C 55% RH	30°C at 55% RH	30°C 55% RH
Energy Consumption	kWh/24h	2,2	2,2	2,25	2,25
Annual Energy Cons.	kWh/year	803	803	821	821
Power Supply		13 Amp	13 Amp	13 Amp	13 Amp
Input Power	W	295	295	295	295
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	45	45	45	45
Internal Dimension (WxDxH)	mm	470 x 440 x 1555	470 x 440 x 1555	505 x 462 x 1555	470 x 440 x 1555
External Dimension (WxDxH)	mm	595 x 600 x 1840	595 x 600 x 1840	595 x 640 x 1980	595 x 640 x 1980
Packed Dimension (WxDxH)	mm	665 x 710 x 2000	665 x 710 x 2000	665 x 715 x 2150	665 x 715 x 2150
40ft Container Load	pcs	54	54	54	54

DISPLAY COOLERS FS Bottle Coolers









FS2380

Bottle Cooler

- Hinged alu-framed glass doors
- Reversible doors
- Adjustable shelves
- Adjustable feet
- LED interior light
- Fan assisted cooling



210

294



Description

The FS range of bottle coolers offers excellent build quality at a competitive price. The cabinet is white with two grey alu-framed glass doors. You get great product presentation combined with a powerful fan assisted refrigeration system, and the adjustable shelves add flexibility. Many models are also available with a canopy (FSC range).



FS1220

Bottle Cooler

- Hinged alu-framed glass door
- Reversible door
- Adjustable shelves
- Adjustable feet
- LED interior light
- Fan assisted cooling







FS1280

Bottle Cooler

- Hinged alu-framed glass door
- Reversible door
- Adjustable shelves
- Adjustable feet
- LED interior light
- Fan assisted cooling









392 259 175

		FS1220	FS1280	FS1380	FS2380
Door No & Type		1 hinged glass door	1 hinged glass door	1 hinged glass door	2 split doors - hinged glass
Door Reversible		Yes	Yes	Yes	Yes
Shelves No & Type		3 wire shelves white	4 wire shelves white	5 wire shelves white	5 wire shelves white
Shelf Color		White	White	White	White
Shelf Dimensions		498 x 405 mm			
Max load on Shelves	kg/m²	196	196	196	196
Temperature Range	°C	+2 to +10	+2 to +10	+2 to +10	+2 to +10
Climate Class		4	4	4	4
Gross / Net Weight	kg	67 / 62	78 / 73	81 / 74	87 / 82
Gross / Net Volume	1	215 / 190	305 / 290	358 / 345	358 / 219
Feet / Legs		2 adjustable feet	2 adjustable feet	2 adjustable feet	2 adjustable feet
Castors		2 rollers	2 rollers	2 rollers	2 rollers
Exterior Finish		White	White	White	White
nterior Finish		ABS	ABS	ABS	ABS
nterior Light		LED	LED	LED	LED
Lock		Yes	Yes	Yes	Yes
Type of Controller		Mechanical	Mechanical	Mechanical	Mechanical
Type of Cooling		Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost		Automatic	Automatic	Automatic	Automatic
Refrigerant		R600a	R600a	R600a	R600a
Refrigerant Charge	g	50	70	80	80
Thermometer		Yes	Yes	Yes	Yes
Energy Class		E	D	D	D
Energy Consumption	kWh/24h	1,9	2	2,2	2,2
Annual Energy Cons.	kWh/year	694	730	803	803
Input Power	W	229	266	295	295
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	45	45	45	45
nternal Dimension (WxDxH)	mm	470 x 440 x 1027	462 x 505 x 1355	505 x 462 x 1555	470 x 440 x 1555
External Dimension (WxDxH)	mm	595 x 640 x 1315	595 x 640 x 1635	595 x 640 x 1840	595 x 640 x 1840
Packed Dimension (WxDxH)	mm	680 x 710 x 1410	680 x 710 x 1740	680 x 710 x 1940	680 x 710 x 1940
40ft Container Load	pcs	54	54	54	54

DISPLAY COOLERS FSC Bottle Coolers







Strong handle



Lock

FSC1380

Bottle Cooler

- LED illuminated canopy
- · Reversible door
- Adjustable shelves
- Adjustable feet
- · LED interior light
- Hinged alu-framed glass door
- Fan assisted cooling



Description

The FSC range of 1-door bottle coolers offers excellent build quality at a competitive price. The cabinet is white with a grey alu-framed glass door. It is ideal for branding and with the illuminated canopy at the top, it is sure to grab the attention of customers. You get great product presentation combined with a powerful fan assisted refrigeration system, and the adjustable shelves add flexibility. Many models are also available without a canopy (FS range).



DID YOU KNOW?

Many of our FSC models with canopy are also available without canopy (FS range).

FSC1450

Bottle Cooler

- Reversible door
- Adjustable shelves
- Adjustable feet
- Hinged alu-framed glass door
- LED illuminated canopy
- Fan assisted cooling
- LED interior light









480 270 360

360

		FSC1380	FSC1450
Door No & Type		1 hinged glass door	1 hinged glass door
Door Reversible		Yes	Yes
Shelves No & Type		5 wire shelves white	6 wire shelves white
Shelf Color		White	White
Shelf Dimensions		498 x 405 mm	574 x 405 mm
Max load on Shelves	kg/m²	196	196
Canopy Type		D-Shape	D-Shape
Temperature Range	°C	+2 to +10	+2 to +10
Climate Class		4	4
Gross / Net Weight	kg	87 / 82	107 / 102
Gross / Net Volume	1	372 / 347	438 / 374
Feet / Legs		2 adjustable feet	2 adjustable feet
Castors		2 rollers	2 rollers
Exterior Finish		White	White
Interior Finish		ABS	ABS
Interior Light		LED	LED
Lock		Yes	Yes
Type of Controller		Mechanical	Mechanical
Type of Cooling		Fan assisted	Fan assisted
Type of Defrost		Automatic	Automatic
Refrigerant		R600a	R600a
Refrigerant Charge	g	80	80
Thermometer		Yes	Yes
Energy Class		D	F
Energy Consumption	kWh/24h	2,25	3,62
Annual Energy Cons.	kWh/year	821	1321
Input Power	W	295	295
Voltage / Frequency	V/Hz	220-240/50	220-240/50
Noise Level	dB(A)	45	45
Internal Dimension (WxDxH)	mm	470 x 440 x 1555	585 x 495 x 1515
External Dimension (WxDxH)	mm	595 x 640 x 1980	680 x 655 x 2090
Packed Dimension (WxDxH)	mm	680 x 710 x 2080	690 x 755 x 2200
40ft Container Load	pcs	54	51

DISPLAY COOLERS SCU Bottle Coolers







Strong handle



SCU2375

Bottle Cooler

- Adjustable shelves
- Reversible doors
- Adjustable feet
- LED interior light
- Hinged alu-framed glass doors
- · Fan assisted cooling



294

448





Description

The SCU range of bottle coolers offers great display and storage space. It comes in several sizes, with or without canopy. It is a white cabinet that has a black reversible alu-framed glass door, adjustable shelves, and LED interior lighting for optimum product presentation. A fan assisted cooling system ensures even cooling over the whole cabinet.



SCU1375

Bottle Cooler

- Reversible door
- Adjustable shelves
- Adjustable feet
- LED interior light
- Hinged alu-framed glass door
- Fan assisted cooling
- Lock







SCU1220

Bottle Cooler

- Reversible door
- Adjustable shelves
- Adjustable feet
- LED interior light
- Hinged alu-framed glass door
- Fan assisted cooling
- Lock









33 cl	50 cl	33 cl	50 cl
301	175	133	133

		SCU1220	SCU1280	SCU1375	SCU2375
Door No & Type		1 hinged glass door	1 hinged glass door	1 hinged glass door	2 split doors - hinged glass
Door Reversible		Yes	Yes	Yes	Yes
Shelves No & Type		3 wire shelves white	4 wire shelves white	5 wire shelves white	5 wire shelves white
Shelf Color		White	White	White	White
Shelf Dimensions		498 x 405 mm			
Max load on Shelves	kg/m²	196	196	196	196
Temperature Range	°C	+2 to +10	+2 to +10	+2 to +10	+2 to +10
Climate Class		4	4	4	4
Gross / Net Weight	kg	67 / 62	78 / 73	81 / 74	87 / 82
Gross / Net Volume	I	215 / 190	290 / 260	372 / 347	372 / 347
Feet / Legs		2 adjustable feet	2 adjustable feet	2 adjustable feet	2 adjustable feet
Castors		2 rollers	2 rollers	2 rollers	2 rollers
Exterior Finish		White	White	White	White
Interior Finish		ABS	ABS	ABS	ABS
Interior Light		LED	LED	LED	LED
Lock		Yes	Yes	Yes	Yes
Type of Controller		Mechanical	Mechanical	Mechanical	Mechanical
Type of Cooling		Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost		Automatic	Automatic	Automatic	Automatic
Refrigerant		R600a	R600a	R600a	R600a
Refrigerant Charge	g	50	70	80	80
Thermometer		Yes	Yes	Yes	Yes
Energy Class		E	D	D	D
Max Ambient		30°C 55% RH	30°C 55% RH	30°C at 55% RH	30°C at 55% RH
Energy Consumption	kWh/24h	1,9	2	2,2	2,2
Annual Energy Cons.	kWh/year	694	730	803	803
Power Supply		13 Amp	13 Amp	13 Amp	13 Amp
Input Power	W	229	266	295	295
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	45	45	45	45
Internal Dimension (WxDxH)	mm	470 x 440 x 1027	470 x 440 x 1347	470 x 440 x 1555	470 x 440 x 1555
External Dimension (WxDxH)	mm	595 x 640 x 1315	595 x 640 x 1635	595 x 640 x 1840	595 x 640 x 1840
Packed Dimension (WxDxH)	mm	680 x 710 x 1410	680 x 710 x 1740	680 x 710 x 1940	680 x 710 x 1940
40ft Container Load	pcs	54	54	54	54

DISPLAY COOLERS SCU-CP Bottle Coolers







Strong handle




Vertical internal light

SCU1450CP

Bottle Cooler

- Hinged glass door
- Illuminated canopy
- · Reversible door
- · Adjustable shelves
- Adjustable feet
- · Fan assisted cooling
- Lock





Description

The SCU range of bottle coolers offers great display and storage space. It comes in several sizes, with or without canopy. It is a white cabinet that has a black reversible alu-framed glass door, adjustable shelves, and LED interior lighting for optimum product presentation. A fan assisted cooling system ensures even cooling over the whole cabinet.



SCU1280CP

Bottle Cooler

- LED illuminated canopy
- Reversible door
- Adjustable shelves
- Adjustable feet
- LED interior light
- Hinged alu-framed glass
- Fan assisted cooling









SCU1375CP

Bottle Cooler

- LED illuminated canopy
- Reversible door
- Adjustable shelves
- Adjustable feet
- LED interior light
- Hinged alu-framed glass door
- Fan assisted cooling
- Lock









		SCU1280CP	SCU1375CP	SCU1450CP
Door No & Type		1 hinged glass door	1 hinged glass door	1 hinged glass door
Door Reversible		Yes	Yes	Yes
Shelves No & Type		4 wire shelves white	5 wire shelves white	6 wire shelves white
Shelf Color		White	White	White
Shelf Dimensions		498 x 405 mm	498 x 405 mm	574 x 405 mm
Max load on Shelves	kg/m²	196	196	196
Canopy Type		D-Shape	D-Shape	D-Shape
Temperature Range	°C	+2 to +10	+2 to +10	+2 to +10
Climate Class		4	4	4
Gross / Net Weight	kg	93 / 83	87 / 82	107 / 102
Gross / Net Volume	I	290 / 260	372 / 347	438 / 374
eet / Legs		2 adjustable feet	2 adjustable feet	2 adjustable feet
Castors		2 rollers	2 rollers	2 rollers
exterior Finish		White	White	White
nterior Finish		ABS	ABS	ABS
nterior Light		LED	LED	LED
ock		Yes	Yes	Yes
ype of Controller		Mechanical	Mechanical	Mechanical
ype of Cooling		Fan assisted	Fan assisted	Fan assisted
ype of Defrost		Automatic	Automatic	Automatic
Refrigerant		R600a	R600a	R600a
efrigerant Charge	g	70	80	80
hermometer		Yes	Yes	Yes
nergy Class		D	D	F
nergy Consumption	kWh/24h	2	2,25	3,62
nnual Energy Cons.	kWh/year	748	821	1321
nput Power	W	266	295	295
oltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
oise Level	dB(A)	45	45	45
nternal Dimension (WxDxH)	mm	470 x 440 x 1347	470 x 440 x 1555	585 x 495 x 1515
xternal Dimension (WxDxH)	mm	595 x 640 x 1775	595 x 640 x 1980	680 x 655 x 2090
Packed Dimension (WxDxH)	mm	680 x 710 x 1875	680 x 710 x 2080	690 x 755 x 2200
10ft Container Load	pcs	54	54	51

DISPLAY COOLERS UR-G Display Coolers






Suitable for Dairy Products







UR400SG

Display Cooler

- Fully automatic
- · Fan assisted cooling
- Electronic thermostat
- Digital controller and temperature display
- · Reversible door
- · Adjustable shelves
- LED interior light with switch
- Adjustable feet with rollers to rear







Internal fan

Strong handle


Description

The UR-SG range of coolers is the stainless steel glass door version of our UR cabinets. These display coolers in stainless steel comes in various sizes and offers great product visibility through a reversible glass door. The cooler has adjustable shelves, making it easy to customize the cabinet to fit your needs. Fan assisted cooling ensures a stabile temperature throughout the cabinet, which is easily controlled by an electronic thermostat.

UR200G

Display Cooler

- Hinged glass door
- Electronic thermostat
- Reversible door
- LED interior light with switch
- Adjustable shelves
- Fan assisted cooling
- Adjustable feet with rollers to rear
- Digital controller and






UR400G

Display Cooler

- Hinged glass door
- Electronic thermostat
- Reversible door
- Adjustable shelves
- Fan assisted cooling
- LED interior light with switch
- Digital controller and temperature display
- Adjustable feet with rollers to rear



		UR200G	UR200SG	UR400G	UR400SG
Total Display Area	m²	0,23	0,23	0,75	0,75
Door No & Type		1 hinged glass door			
Door Reversible		Yes	Yes	Yes	Yes
Shelves No & Type		3 wire shelves white	3 wire shelves white	4 wire shelves white	4 wire shelves white
Shelf Color		White	White	White	White
Shelf Dimensions		505 x 415 mm			
Bottom Shelf Dimensions		505 x 220	505 x 220	505 x 220	505 x 220
Max load on Shelves	kg/m²	110	110	110	110
Temperature Range	°C	+2 to +10	+2 to +10	+2 to +10	+2 to +10
Climate Class		4	4	4	4
Gross / Net Weight	kg	49 / 44	49 / 44	85 / 80	85 / 80
Gross / Net Volume	I	136 / 119	136 / 119	374 / 350	374 / 350
Feet / Legs		4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Castors		2 rollers	2 rollers	2 rollers	2 rollers
Exterior Finish		White	SS430	White	SS430
Interior Finish		White ABS	White ABS	White ABS	White ABS
Interior Light		LED	LED	LED	LED Cold white
Lock		Yes	Yes	Yes	Yes
Type of Controller		Electronic	Electronic	Electronic	Electronic
Type of Cooling		Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost		Automatic	Automatic	Automatic	Automatic
Refrigerant		R600a	R600a	R600a	R600a
Refrigerant Charge	g	35	35	75	75
Thermometer	_	Yes	Yes	Yes	Yes
Energy Class		В	В	В	В
Max Ambient		30°C at 55% RH			
Energy Consumption	kWh/24h	1,6	1,6	2,12	2,12
Annual Energy Cons.	kWh/year	584	584	773	773
Power Supply	-	13 Amp	13 Amp	13 Amp	13 Amp
Input Power	W	105	105	130	130
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	40	40	40	40
Internal Dimension (WxDxH)	mm	510 x 485 x 620	510 x 485 x 620	506 x 485 x 1620	506 x 485 x 1620
External Dimension (WxDxH)	mm	600 x 585 x 855	600 x 585 x 855	600 x 585 x 1855	600 x 585 x 1855
Packed Dimension (WxDxH)	mm	690 x 650 x 910	690 x 650 x 910	690 x 650 x 2050	690 x 650 x 2050
40ft Container Load	pcs	108	108	54	54

DISPLAY COOLERS

UR-G Display Coolers GN2/1





Internal fan



Strong castors as option

UR600SG

Display Cooler GN2/1

- New design
- Stainless steel cabinet
- · Hinged glass door
- Electronic thermostat
- Reversible door
- Adjustable shelves GN2/1
- · LED interior light

792

· Fan assisted cooling

480



387

Description

The UR-SG range of coolers is the stainless steel glass door version of our UR cabinets. These display coolers in stainless steel comes in various sizes and offers great product visibility through a reversible glass door. The cooler has adjustable shelves, making it easy to customize the cabinet to fit your needs. Fan assisted cooling ensures a stabile temperature throughout the cabinet, which is easily controlled by an electronic thermostat.



UR600G

Display Cooler GN2/1

- New design
- Hinged glass door
- Electronic thermostat
- Reversible door
- Adjustable shelves
- LED interior light

792 477

• Fan assisted cooling

B A G

387


480



UR600BG

Display Cooler GN2/1

- Black interior and exterior
- Adjustable shelves GN2/1
- Reversible glass door
- Fan assisted cooling
- Digital controller and temperature display
- LED interior light
- Adjustable feet with rollers to rear
- Lock



		UR600BG	UR600G	UR600SG
otal Display Area	m²	0,91	0,91	0,91
oor No & Type		1 hinged glass door	1 hinged glass door	1 hinged glass door
oor Reversible		Yes	Yes	Yes
helves No & Type		4 wire shelves black	4 wire shelves white	4 wire shelves white
nelf Color		Black	White	White
nelf Dimensions		GN2/1	GN2/1	GN2/1
ttom Shelf Dimensions		650 x 305	650 x 305	650 x 305
ax load on Shelves	kg/m²	196	196	196
mperature Range	°C	+2 to +10	+2 to +10	+2 to +10
imate Class		4	4	4
ross / Net Weight	kg	112 / 107	112 / 107	112 / 107
ross / Net Volume	I	605 / 570	605 / 570	605 / 570
eet / Legs		4 adjustable feet	4 adjustable feet	4 adjustable feet
astors		2 rollers	2 rollers	2 rollers
terior Finish		Black	White	SS430
erior Finish		Black	White ABS	White ABS
erior Light		LED	LED	LED
ck		Yes	Yes	Yes
pe of Controller		Electronic	Electronic	Electronic
pe of Cooling		Fan assisted	Fan assisted	Fan assisted
oe of Defrost		Automatic	Automatic	Automatic
frigerant		R600a	R600a	R600a
frigerant Charge	g	100	100	100
ermometer		Yes	Yes	Yes
ergy Class		В	В	В
ax Ambient		30°C at 55% RH	30°C at 55% RH	30°C at 55% RH
ergy Consumption	kWh/24h	2,25	2,25	2,25
nual Energy Cons.	kWh/year	820	820	820
wer Supply	-	13 Amp	13 Amp	13 Amp
out Power	W	130	130	130
Itage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
ise Level	dB(A)	45	45	45
ternal Dimension (WxDxH)	mm	653 x 580 x 1680	653 x 580 x 1680	653 x 580 x 1680
ternal Dimension (WxDxH)	mm	777 x 695 x 1895	777 x 695 x 1895	777 x 695 x 1895
acked Dimension (WxDxH)	mm	850 x 770 x 2070	850 x 770 x 2070	850 x 770 x 2070
ft Container Load	pcs	42	42	42

DISPLAY COOLERS Atom Maxi Coolers




Atom Maxi C3DBB

Display Cooler

- Great product presentation
- Black interior and exterior
- Low energy consumption
- Self-closing glass doors
- Double glazed tempered glass
- Internal vertical LED light
- Ventilated cooling
- Adjustable shelves behind each door
- Stainless steel base with mirror effect
- Digital controller and temperature display
- Freezer option available







Digital controller

Description

The Atom Maxi range of display coolers offers great quality at a competitive price. It comes with 1, 2 or 3 self-closing glass doors, LED lighting, and adjustable shelves for optimal product presentation. It has an efficient ventilated cooling system allowing for a low energy consumption, and an easy-to-use temperature controller. Also available in a freezer version.

Atom Maxi C2DB

Display Cooler

- Great product presentation
- Low energy consumption
- Self-closing glass doors
- Double glazed tempered glass
- Internal vertical LED light
- Ventilated cooling
- Adjustable shelves behind each door
- Stainless steel base with mirror effect
- Digital controller and temperature display
- Castors
- Freezer option available



Atom Maxi C1DBB

Display Cooler

- Great product presentation
- Black interior and exterior
- Low energy consumption
- Self-closing hinged glass door
- Double glazed tempered glass
- Internal vertical LED light
- Ventilated cooling
- Adjustable shelves
- Stainless steel base with mirror effect
- Digital controller and temperature display
- Freezer option available












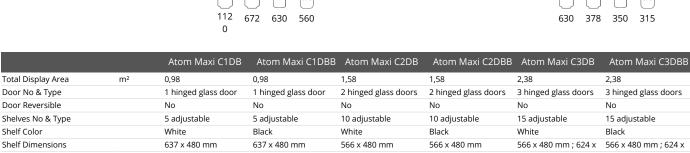

rotal Display Area	1111	0,50	0,50	1,50	1,50	2,30	2,30
Door No & Type		1 hinged glass door	1 hinged glass door	2 hinged glass doors	2 hinged glass doors	3 hinged glass doors	3 hinged glass doors
Door Reversible		No	No	No	No	No	No
Shelves No & Type		5 adjustable	5 adjustable	10 adjustable	10 adjustable	15 adjustable	15 adjustable
Shelf Color		White	Black	White	Black	White	Black
Shelf Dimensions		637 x 480 mm	637 x 480 mm	566 x 480 mm	566 x 480 mm	566 x 480 mm; 624 x	566 x 480 mm ; 624 x
Max load on Shelves	kg/m²	135	135	135	135	135	135
Temperature Range	°C	-1 to +10	-1 to +10	-1 to +10	-1 to +10	-1 to +10	-1 to +10
Climate Class		3	3	3	3	3	3
Gross / Net Weight	kg	141.5 / 130	141.5 / 130	197 / 179	197 / 179	235 / 207.5	235 / 207.5
Gross / Net Volume	1	614 / 459	614 / 459	1081 / 809	1081 / 809	1664 / 1264	1664 / 1264
Castors		4 castors	4 castors	4 castors	4 castors	6 castors	6 castors
Exterior Finish		Black RAL9005	Black RAL9005	Black RAL9005	Black RAL9005	Black RAL9005	Black RAL9005
Interior Finish		White RAL9003	Black	White RAL9003	Black	White RAL9003	Black
Interior Light		LED	LED	LED	LED	LED	LED
Type of Controller		Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic-Off Cycle	Automatic-Off Cycle	Automatic-Off Cycle	Automatic-Off Cycle	Automatic-Off Cycle	Automatic-Off Cycle
Refrigerant		R290	R290	R290	R290	R290	R290
Refrigerant Charge	g	85	85	110	110	130	130
Thermometer		Yes	Yes	Yes	Yes	Yes	Yes
Energy Class		В	В	В	В	В	В
Max Ambient		25°C at 60% RH	25°C at 60% RH	25°C at 60% RH	25°C at 60% RH	25°C at 60% RH	25°C at 60% RH
Energy Consumption	kWh/24h	2,5	2,5	4,17	4,17	5,41	5,41
Annual Energy Cons.	kWh/year	913	913	1522	1522	1975	1975
Power Supply		13 Amp		13 Amp		13 Amp	
Input Power	W	460	460	460	460	700	700
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	58	58	62	62	65	65
Internal Dimension (WxDxH)	mm	660 x 595 x 1568	660 x 595 x 1568	1163 x 595 x 1568	1163 x 595 x 1568	1790 x 595 x 1568	1790 x 595 x 1568
External Dimension (WxDxH)	mm	750 x 710 x 2003	750 x 710 x 2003	1253 x 710 x 2003	1253 x 710 x 2003	1880 x 710 x 2003	1880 x 710 x 2003
Packed Dimension (WxDxH)	mm	775 x 770 x 2090	775 x 770 x 2090	1278 x 760 x 2090	1278 x 760 x 2090	1905 x 760 x 2090	1905 x 760 x 2090
40ft Container Load	pcs	45	45	27	27	18	18

1 DISPLAY COOLERS NC Coolers



Freezer Option Available



Suitable for Dairy Products





NC7500G

Display Cooler

- Impressive storage space
- LED illuminated canopy
- Internal vertical LED light
- Self-closing glass doors
- Ventilated cooling
- Adjustable shelves
- · Matching freezer model









840

1440

864

Digital thermostat

Description

The NC range of display coolers has a very low energy consumption. It comes with 1, 2 or 3 doors and offers impressive storage space. The illuminated canopy grabs the attention of customers, while the self-closing glass doors, adjustable shelves, and internal vertical LED lighting ensure that the content looks its best.



NC5000G

Display Cooler

- Impressive storage space
- LED illuminated canopy
- Internal vertical LED light
- Self-closing glass doors
- Ventilated cooling
- Adjustable shelves
- Matching freezer model







DID YOU KNOW?

The NC range is available with 1, 2, or 3 doors as cooler or freezer (NF range).


		NC2500G	NC5000G	NC7500G
Total Display Area	m²	0,66	1,3	2,02
Door No & Type		1 hinged glass door	2 hinged glass doors	3 hinged glass doors
Door Reversible		No	No	No
Shelves No & Type		5 wire shelves white	10 wire shelves white	15 wire shelves white
Shelf Color		White	White	White
Shelf Dimensions		488 x 510	615 x 445 mm	585 x 481
Max load on Shelves	kg/m²	196	196	196
Canopy Type		D-Shape	D-Shape	D-Shape
Temperature Range	°C	+2 to +8	+2 to +8	+2 to +8
Climate Class		4	4	4
Gross / Net Weight	kg	160 / 138	252 / 212	347 / 308
Gross / Net Volume	I	515 / 412	1149 / 1079	1784 / 1657
Feet / Legs		2 adjustable feet	2 adjustable feet	2 adjustable feet
Castors		4 rollers	4 rollers	6 rollers
Exterior Finish		White	White	White
Interior Finish		White	White	White
Interior Light		2 x Vertically LED in door frame	2 x Vertically LED in door frame	2 x Vertically LED in door frame
Lock		Yes	Yes	Yes
Type of Controller		Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic
Refrigerant		R290	R290	R290
Refrigerant Charge	g	90	145	150
Thermometer		Yes	Yes	Yes
Energy Class		В	В	D
Max Ambient		30°C at 55% RH		30°C at 55% RH
Energy Consumption	kWh/24h	1,76	2,81	9,9
Annual Energy Cons.	kWh/year	643	1024	3619
Power Supply		13 Amp		13 Amp
Input Power	W	300	500	700
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	53	53	58
Internal Dimension (WxDxH)	mm	560 x 570 x 1331	1250 x 570 x 1331	1937 x 570 x 1331
External Dimension (WxDxH)	mm	680 x 700 x 2022	1370 x 700 x 2022	2057 x 700 x 2022
Packed Dimension (WxDxH)	mm	715 x 765 x 2180	1405 x 765 x 2180	2125 x 765 x 2180
40ft Container Load	pcs	48	24	15

2-Door Display Coolers - 890/891









FS890H BLACK

Black Display Cooler

- · Hinged full-height glass doors
- Black interior and exterior
- Internal vertical LED light
- · Ventilated cooling
- · Adjustable shelves
- Adjustable feet
- Fully automatic
- Digital temperature display
- · Self-closing doors









Strong handles

Description

The FS BLACK range of black 2-door display coolers offers excellent build quality at a competitive price. It has a contemporary look with a black interior and a black exterior with black alu-framed glass doors. The shelves are adjustable, making the FS range a flexible solution. You get great product presentation combined with a powerful ventilated refrigeration system controlled by an electronic thermostat. Many models are also available with a canopy (FSC range).





FSC891H Black

Black 2-door display cooler with canopy

- Approx. 58% more energy efficient than previous FSCrange
- LED illuminated canopy
- Internal vertical LED light
- Black interior and exterior
- Adjustable shelves
- Ventilated cooling
- Hinged alu-framed glass doors
- Adjustable feet with rollers to rear
- Digital temperature display



FSC891H



2-door display cooler with canopy

- Approx. 58% more energy efficient than previous FSC-
- Self-closing hinged alu-framed glass doors
- LED illuminated canopy
- Internal vertical LED light
- Adjustable shelves
- Adjustable feet with rollers to rear
- Ventilated cooling




• Digital temperatu	ire dispia	94 94	l8 480 528 468			948	480 528 468
		FS890H	FS890H BLACK	FSC891H	FSC891H Black	FSC891S	FSC891S Black
Door No & Type		2 hinged glass doors	2 hinged glass doors	2 hinged self-closing	2 hinged self-closing	2 self-closing sliding	2 self-closing sliding
Door Reversible		No	No	No	No	No	No
Shelves No & Type		5 wire shelves white	5 wire shelves black	5 wire shelves white	5 wire shelves black	5 wire shelves white	5 wire shelves black
Shelf Color		White	Black	White	Black	White	Black
Shelf Dimensions		794 x 540 mm	794 x 540 mm	794 x 540 mm	794 x 540 mm	794 x 470 mm	794 x 470 mm
Max load on Shelves	kg/m²	196	196	196	196	196	196
Canopy Type		-	-	D-Shape	D-Shape	D-Shape	D-Shape
Temperature Range	°C	+2 to +10	+2 to +10	+2 to +10	+2 to +10	+2 to +10	+2 to +10
Climate Class		4	4	4	4	4	4
Gross / Net Weight	kg	166 / 153	166 / 153	166 / 153	166 / 153	166 / 153	166 / 153
Gross / Net Volume	I	707 / 535	707 / 535	707 / 535	707 / 535	707 / 462	707 / 462
Feet / Legs		4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Castors		4 rollers	4 rollers	4 rollers	4 rollers	4 rollers	4 rollers
Exterior Finish		White RAL9016	Black RAL9005	White RAL9016	Black RAL9005	White RAL9016	Black RAL9005
Interior Finish		White painted steel	Black RAL9005	White painted steel	Black RAL9005	White painted steel	Black RAL9005
Interior Light		LED	LED	LED	LED	LED	LED
Lock		Yes	Yes	Yes	Yes	Yes	Yes
Type of Controller		Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
Refrigerant		R290	R290	R290	R290	R290	R290
Refrigerant Charge	g	115	115	115	115	115	115
Thermometer		Yes	Yes	Yes	Yes	Yes	Yes
Energy Class		F	F	С	С	D	D
Max Ambient		30°C at 55% RH	30°C at 55% RH	30°C at 55% RH	30°C at 55% RH	30°C at 55% RH	30°C at 55% RH
Energy Consumption	kWh/24h	6,101	6,101	2,63	2,63	3,32	3,32
Annual Energy Cons.	kWh/year	2227	2227	960	960	1212	1212
Power Supply		13 Amp	13 Amp	13 Amp	13 Amp	13 Amp	13 Amp
Input Power	W	410	410	410	410	410	410
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	48	48	48	48	48	48
Internal Dimension (WxDxH)	mm	810 x 561 x 1556	810 x 561 x 1556	810 x 561 x 1556	810 x 561 x 1556	810 x 561 x 1556	810 x 561 x 1556
External Dimension (WxDxH)	mm	890 x 740 x 1990	890 x 740 x 1990	890 x 740 x 1990	890 x 740 x 1990	890 x 740 x 1990	890 x 740 x 1990
Packed Dimension (WxDxH)	mm	950 x 840 x 2160	950 x 840 x 2160	950 x 840 x 2160	950 x 840 x 2160	950 x 840 x 2160	950 x 840 x 2160
40ft Container Load	pcs	28	28	28	28	28	28

2-Door Display Coolers - 1000/1002









FSC1000H BLACK

Black 2-door display cooler with canopy

- Illuminated canopy
- Internal vertical light
- Black interior and exterior
- Adjustable shelves
- · Adjustable feet
- Ventilated cooling
- · Hinged alu-framed glass doors
- · Adjustable feet with rollers to rear
- Self-closing doors







Illuminated canopy

LED light

Description

The FSC range of black 2-door display coolers with an illuminated canopy offers excellent build quality at a competitive price. It has a contemporary look with a black interior and a black exterior with black alu-framed glass doors. The shelves are adjustable, making the FSC range a flexible solution. You get great product presentation combined with a powerful ventilated refrigeration system controlled by an electronic thermostat. Many models are aso available without a canopy (FS range).



FS1002S


Display Cooler

- Self-closing sliding glass doors
- Internal vertical LED light
- Adjustable shelves
- Powder coated inner liner
- Adjustable feet

663 455 455

Ventilated cooling



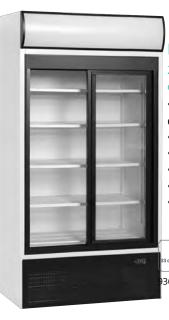

FSC1000S

2-door display cooler with canopy

- Self-closing sliding glass doors
- Illuminated canopy
- Internal vertical light
- Adjustable shelves
- Adjustable feet
- Ventilated cooling

				F G
33 cl	50 cl	33 cl	50 cl	
36	663	455	455	


		FS1002S	FSC1000H	FSC1000H BLACK	FSC1000S
Door No & Type		2 self-closing sliding glass doors	2 hinged glass doors	2 hinged glass doors	2 self-closing sliding glass doors
Door Reversible		No	No	No	No
Shelves No & Type		5 wire shelves white	5 wire shelves white	5 wire shelves black	5 wire shelves white
Shelf Color		White	White	Black	White
Shelf Dimensions		870 x 470 mm	870 x 540 mm	870 x 540 mm	870 x 470 mm
Bottom Shelf Dimensions		870 x 475	870 x 475	870 x 475	870 x 475
Max load on Shelves	kg/m²	196	196	196	196
Canopy Type		-	D-Shape	L-Shape	D-Shape
Temperature Range	°C	+2 to +10	+2 to +10	+2 to +10	+2 to +10
Climate Class		4	4	4	4
Gross / Net Weight	kg	176 / 163	175 / 162	175 / 162	164 / 159
Gross / Net Volume	I	730 / 540	796 / 524	796 / 524	771 / 524
Feet / Legs		4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Castors		4 rollers	4 rollers	4 rollers	4 rollers
Exterior Finish		White RAL9016	White RAL9016	Black RAL9005	White RAL9016
Interior Finish		White painted steel	White painted steel	Black RAL9005	White painted steel
Interior Light		LED	LED	LED	LED
Lock		Yes	Yes	Yes	Yes
Type of Controller		Electronic	Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic	Automatic
Refrigerant		R290	R290	R290	R290
Refrigerant Charge	g	120	120	120	120
Thermometer		Yes	Yes	Yes	Yes
Energy Class		F	F	F	F
Max Ambient		30°C at 55% RH	30°C at 55% RH	30°C at 55% RH	30°C at 55% RH
Energy Consumption	kWh/24h	5,96	5,96	5,96	5,96
Annual Energy Cons.	kWh/year	2175	2175	2175	2175
Power Supply		13 Amp	13 Amp	13 Amp	13 Amp
Input Power	W	450	450	450	450
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	48	48	48	48
Internal Dimension (WxDxH)	mm	890 x 573 x 1533	890 x 670 x 1533	890 x 670 x 1533	890 x 572 x 1533
External Dimension (WxDxH)	mm	1000 x 735 x 1990	1000 x 790 x 2000	1000 x 790 x 2000	1000 x 740 x 2000
Packed Dimension (WxDxH)	mm	1060 x 800 x 2160	1080 x 840 x 2100	1080 x 840 x 2100	1080 x 800 x 2100
40ft Container Load	pcs	28	26	26	28

2-Door Display Coolers - 1200/1202









FSC1200H BLACK

Black 2-door display cooler with canopy

- Illuminated canopy
- Internal vertical light
- Black interior and exterior
- Adjustable shelves
- Ventilated cooling
- · Hinged alu-framed glass door
- · Adjustable feet with rollers to rear
- · Self-closing doors









LED light

Description

The FSC range of black 2-door display coolers with an illuminated canopy offers excellent build quality at a competitive price. It has a contemporary look with a black interior and a black exterior with black alu-framed glass doors. The shelves are adjustable, making the FSC range a flexible solution. You get great product presentation combined with a powerful ventilated refrigeration system controlled by an electronic thermostat. Many models are also available without a canopy (FS range).





FSC1200S

2-door display cooler with canopy

- Self-closing sliding glass doors
- Illuminated canopy
- Internal vertical light
- Adjustable shelves
- Adjustable feet
- Ventilated cooling





FS1202S

Display Cooler

- Self-closing sliding glass doors
- Internal vertical LED light
- Adjustable shelves
- Powder coated inner liner
- Adjustable feet
- Ventilated cooling






		FS1202H	FS1202S	FSC1200H	FSC1200H BLACK	FSC1200S
Door No & Type		2 hinged glass doors	2 self-closing sliding glass doors	2 hinged glass doors	2 hinged glass doors	2 self-closing sliding glass door
Door Reversible		No	No	No	No	No
Shelves No & Type		10 wire shelves white	5 wire shelves white	5 wire shelves white	5 wire shelves black	5 wire shelves white
Shelf Color		White	White	White	Black	White
Shelf Dimensions		1072 x 540 mm	1072 x 470 mm	1072 x 540 mm	1072 x 540 mm	1072 x 470 mm
Bottom Shelf Dimensions		1070 x 475	1070 x 475	1070 x 475	1070 x 475	1070 x 475
Max load on Shelves	kg/m²	196	196	196	196	196
Canopy Type		-	-	D-Shape	L-Shape	D-Shape
Temperature Range	°C	+2 to +10	+2 to +10	+2 to +10	+2 to +10	+2 to +10
Climate Class		4	4	4	4	4
Gross / Net Weight	kg	189 / 174	189 / 174	189 / 174	189 / 174	183 / 178
Gross / Net Volume	ı	936 / 652	895 / 660	1082 / 645	1082 / 645	967 / 645
Feet / Legs		4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Castors		4 rollers	4 rollers	4 rollers	4 rollers	4 rollers
Exterior Finish		White RAL9016	White RAL9016	White RAL9016	Black RAL9005	White RAL9016
Interior Finish		White painted steel	White painted steel	White painted steel	Black RAL9005	White painted steel
Interior Light		LED	LED	LED	LED	LED
Lock		Yes	Yes	Yes	Yes	Yes
Type of Controller		Electronic	Electronic	Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic	Automatic	Automatic
Refrigerant		R290	R290	R290	R290	R290
Refrigerant Charge	g	120	120	120	120	120
Thermometer	0	Yes	Yes	Yes	Yes	Yes
Energy Class		F	F	F	F	F
Max Ambient		30°C at 55% RH	30°C at 55% RH	30°C at 55% RH	30°C at 55% RH	30°C at 55% RH
Energy Consumption	kWh/24h	6,68	6,8	6,8	6,8	8,65
Annual Energy Cons.	kWh/year	2438	2482	2482	2482	3157
Power Supply		13 Amp	13 Amp	13 Amp	13 Amp	13 Amp
Input Power	W	850	850	880	880	880
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	48	48	48	48	48
nternal Dimension (WxDxH)	mm	1090 x 573 x 1533	1090 x 573 x 1533	1090 x 670 x 1533	1090 x 670 x 1533	1090 x 572 x 1533
External Dimension (WxDxH)	mm	1200 x 735 x 1990	1200 x 735 x 1990	1200 x 790 x 2000	1200 x 790 x 2000	1200 x 740 x 2000
Packed Dimension (WxDxH)	mm	1250 x 850 x 2160	1250 x 800 x 2160	1250 x 840 x 2100	1250 x 840 x 2100	1250 x 840 x 2100
40ft Container Load	pcs	23	23	23	23	23

2-Door Display Coolers - 1950







FSC1950H

2-door display cooler with canopy

- Illuminated canopy
- Internal vertical light
- Adjustable shelves
- · Adjustable feet
- Ventilated cooling
- Hinged alu-framed glass doors







Strong handles

Vertical internal light

Description

The FSC range of 2 and 3-door display coolers with an illuminated canopy offers excellent build quality at a competitive price. Choose between white or black exterior cabinets with black alu-framed glass doors - hinged or sliding. The shelves are adjustable, making the FSC range a flexible solution. You get great product presentation combined with a powerful ventilated refrigeration system controlled by an electronic thermostat. Many models are also available without a canopy (FS range).



DID YOU KNOW?

We offer branding of our products. We will prepair, print and place your advertising material on the units – at our warehouses or at the factories for larger quantities.

FSC1950S

2-door display cooler with canopy



- Self-closing sliding glass doors
- Illuminated canopy
- Internal vertical light
- Adjustable shelves
- Adjustable feet
- Ventilated cooling







		FSC1950H	FSC1950S
Door No & Type		2 hinged glass doors	2 self-closing sliding glass doors
Door Reversible		No	No
Shelves No & Type		5 wire shelves white	5 wire shelves white
Shelf Color		White	White
Shelf Dimensions		985 x 555 mm	985 x 555 mm
Max load on Shelves	kg/m²	196	196
Canopy Type		D-Shape	D-Shape
Temperature Range	°C	+2 to +10	+2 to +10
Climate Class		4	4
Gross / Net Weight	kg	210 / 200	198 / 193
Gross / Net Volume	1	875 / 710	875 / 710
Feet / Legs		4 adjustable feet	4 adjustable feet
Castors		4 rollers	4 rollers
Exterior Finish		White RAL9016	White RAL9016
Interior Finish		White painted steel	White painted steel
Interior Light		Yes	Yes
Lock		Yes	Yes
Type of Controller		Electronic	Electronic
Type of Cooling		Ventilated	Ventilated
Type of Defrost		Automatic	Automatic
Refrigerant		R290	R290
Refrigerant Charge	g	125	125
Thermometer		Yes	Yes
Energy Class		F	F
Energy Consumption	kWh/24h	6,4	6,4
Annual Energy Cons.	kWh/year	2336	2336
Input Power	W	490	490
Voltage / Frequency	V/Hz	220-240/50	220-240/50
Noise Level	dB(A)	48	48
Internal Dimension (WxDxH)	mm	1000 x 750 x 1533	1000 x 652 x 1533
External Dimension (WxDxH)	mm	1110 x 875 x 2010	1110 x 825 x 2010
Packed Dimension (WxDxH)	mm	1180 x 910 x 2100	1180 x 910 x 2100
40ft Container Load	pcs	22	22

3-Door Display Coolers - 1600





FSC1600H

3-door display cooler with canopy

- Improved product presentation
- 2 internal fans
- LED illuminated canopy
- LED light in door frame
- · Less maintenance
- Adjustable shelves
- Ventilated cooling
- · Hinged alu-framed glass doors









Digital thermostat


Description

The FSC range of 2 and 3-door display coolers with an illuminated canopy offers excellent build quality at a competitive price. Choose between white or black exterior cabinets with black alu-framed glass doors - hinged or sliding. The shelves are adjustable, making the FSC range a flexible solution. You get great product presentation combined with a powerful ventilated refrigeration system controlled by an electronic thermostat. Many models are also available without a canopy (FS range).



FS1600H

Display Cooler



- 2 internal fans
- Less maintenance
- LED light in door frame
- Adjustable shelves
- Ventilated cooling
- Hinged alu-framed glass doors





		FS1600H	FSC1600H
Door No & Type		3 hinged self-closing glass doors	3 hinged self-closing glass doors
Door Reversible		No	No
Shelves No & Type		15 wire shelves white	15 wire shelves white
Shelf Color		White	White
Shelf Dimensions		465/535 x 470 mm	465/535 x 470 mm
Max load on Shelves	kg/m²	196	196
Canopy Type			L-Shape
Temperature Range	°C	+2 to +10	+2 to +10
Climate Class		4	4
Gross / Net Weight	kg	211 / 206	229 / 224
Gross / Net Volume	I	1329 / 825	1315 / 825
Feet / Legs		6 adjustable legs	6 adjustable legs
Castors		6 wheels	6 wheels
Exterior Finish		White RAL9016	White RAL9016
Interior Finish		White painted steel	White painted steel
Interior Light		LED	LED
Lock		Yes	Yes
Type of Controller		Electronic	Electronic
Type of Cooling		Ventilated	Ventilated
Type of Defrost		Automatic	Automatic
Refrigerant		R290	R290
Refrigerant Charge	g	145	145
Thermometer		Yes	Yes
Energy Class		E	E
Energy Consumption	kWh/24h	6,4	6,6
Annual Energy Cons.	kWh/year	2336	2409
Input Power	W	817	817
Voltage / Frequency	V/Hz	220-240/50	220-240/50
Noise Level	dB(A)	45	45
Internal Dimension (WxDxH)	mm	1492 x 585 x 1518	1492 x 585 x 1518
External Dimension (WxDxH)	mm	1600 x 730 x 2073	1600 x 730 x 2073
Packed Dimension (WxDxH)	mm	1660 x 795 x 2124	1660 x 840 x 2124
40ft Container Load	pcs	14	14

COOLERS I 60

MDCA Multideck Coolers



MDCA2500HB

Supermarket Multideck Cooler

- EU Energy Class B
- Excellent product visibility
- Controller with Bluetooth and NFC connectivity
- Can be multiplexed Create uninterrupted continuous line
- Adjustable shelves with tilting function
- Ticket strip and acrylic front riser as standard
- Solid 40 mm endwalls with mirrored interior
- Internal vertical and horizontal LED light
- Stainless steel bumper bars
- Energy saving variable speed compressor
- Multiplexing kit as accessory









Strong handles

Description

The MDCA range of multideck coolers is designed for retail settings. It has temperature class 3M1, while boasting of a low-energy and low-noise cooling system. It offers great storage and display space with glass dorrs, adjustable shelves that can be tilted for a better product presentation, as well as vertical and horizontal LED lighting. The MDCA is available in several sizes.





MDCA937HB

Supermarket Multideck Cooler

- EU Energy Class B
- Excellent product visibility
- Controller with Bluetooth and NFC connectivity
- Can be multiplexed Create uninterrupted continuous line
- Adjustable shelves with tilting function
- Ticket strip and acrylic front riser as standard
- Solid 40 mm endwalls with mirrored interior
- Internal vertical and horizontal LED light
- Stainless steel bumper bars
- Energy saving variable speed compressor
- Multiplexing kit as accessory

MDCA1875HB

Supermarket Multideck Cooler

- EU Energy Class B
- Excellent product visibility
- Controller with Bluetooth and NFC connectivity
- Can be multiplexed Create uninterrupted continuous line
- Adjustable shelves with tilting function
- Ticket strip and acrylic front riser as standard
- Solid 40 mm endwalls with mirrored interior
- Internal vertical and horizontal LED light
- Stainless steel bumper bars
- Energy saving variable speed compressor
- Multiplexing kit as accessory

• Multiplexing kit as	saccess	ory	• Multiplexing kit as accessory			
		MDCA1250HB	MDCA1875HB	MDCA2500HB	MDCA3750HB	MDCA937HB
Total Display Area	m²	1,7	2,63	3,55	5,51	1,29
Door No & Type		2 hinged glass door	3 hinged glass door	4 hinged glass door	6 hinged glass door	2 hinged glass door
Door Reversible		No	No	No	No	No
Shelves No & Type		5 black sheet metal	5 black sheet metal	5 black sheet metal	5 black sheet metal	5 black sheet metal
Shelf Color		Black	Black	Black	Black	Black
Shelf Dimensions		1250x400	1875x400	2500x400	3750x400	937x400
Max load on Shelves	kg/m²	120	120	120	120	120
Temperature Range	°C	-1 to +5	-1 to +5	-1 to +5	-1 to +5	-1 to +5
Climate Class		3	3	3	3	3
Gross / Net Weight	kg	370 / 335	450 / 408	560 / 512	780 / 720	290 / 260
Gross / Net Volume	I	1049 / 740	1573 / 1110	2098 / 1480	3147 / 2220	786 / 555
Feet / Legs		4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Exterior Finish		Black RAL9005	Black RAL9005	Black RAL9005	Black RAL9005	Black RAL9005
Interior Finish		Black RAL9005	Black RAL9005	Black RAL9005	Black RAL9005	Black RAL9005
Interior Light		Yes	Yes	Yes	Yes	Yes
Lock		No	No	No	No	No
Type of Controller		Electronic	Electronic	Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Refrigerant		R290	R290	R290	R290	R290
Refrigerant Charge	g	130	150	2x130	2x150	120
Thermometer		Yes	Yes	Yes	Yes	Yes
Energy Class		В	В	В	В	В
Max Ambient		25°C at 60% RH	25°C at 60% RH	25°C at 60% RH	25°C at 60% RH	25°C at 60% RH
Energy Consumption	kWh/24h	5,11	7,5	7,41	14,75	4,32
Annual Energy Cons.	kWh/year	1865	2738	2705	5384	1577
Input Power	W	807	912	1114	1324	795
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	60	60	60	60	60
Internal Dimension (WxDxH)	mm	1250 x 565 x 1512	1875 x 565 x 1512	2500 x 565 x 1512	3750 x 565 x 1512	937 x 565 x 1512
External Dimension (WxDxH)	mm	1330 x 805 x 2095	1955 x 805 x 2095	2580 x 805 x 2095	3830 x 805 x 2095	1017 x 805 x 2095
Packed Dimension (WxDxH)	mm	1400 x 900 x 2400	2100 x 900 x 2400	2700 x 900 x 2400	3950 x 900 x 2400	1150 x 900 x 2400
40ft Container Load	pcs	21	13	8	6	26



1 DISPLAY COOLERS Tabletop Coolers





Sliding doors



Wall hanging bracket



FSC100

Tabletop Cooler

- Sliding glass doors
- LED illuminated canopy
- Adjustable shelves
- Adjustable feet
- LED interior light
- Fan assisted cooling





Description

The FSC tabletop range offers excellent build quality at a competitive price. The display cooler is ideal for branding and with the illuminated canopy at the top, it is sure to grab the attention of customers. Because of its small size, it is perfect as a tabletop cooler or for hanging on the wall (it comes with wall hanging brackets).

FS60CP

Tabletop Cooler

- Sliding glass doors
- LED illuminated canopy
- Adjustable shelves
- Adjustable feet
- LED interior light
- Fan assisted cooling








FS80CP

Tabletop Cooler

- LED illuminated canopy
- Adjustable shelves
- Adjustable feet
- LED interior light
- Fan assisted cooling







		FS60CP	FS80CP	FSC100
Door No & Type		1 hinged self-closing glass door	1 hinged self-closing glass door	2 sliding glass doors
Door Reversible		Yes	Yes	No
Shelves No & Type		2 fixed wire shelves	2 wire shelves white	3 wire shelves white
Shelf Color		White	White	White
Shelf Dimensions		398 x 275 mm	400 x 270 mm	577 x 209 mm
Max load on Shelves	kg/m²	196	196	196
Canopy Type		D-Shape	D-Shape	D-Shape
Temperature Range	°C	+2 to +10	+2 to +10	+2 to +10
Climate Class		4	4	4
Gross / Net Weight	kg	34 / 32	43 / 38	51 / 46
Gross / Net Volume	I	60 / 45	84 / 55	100 / 60
Feet / Legs		4 adjustable feet	4 adjustable feet	4 adjustable feet
Exterior Finish		White	White	White
nterior Finish		ABS	ABS	ABS
nterior Light		LED	LED	LED
Lock		Yes	Yes	Yes
Type of Controller		Mechanical	Mechanical	Mechanical
Type of Cooling		Fan assisted	Fan assisted	Fan assisted
Type of Defrost		Automatic	Automatic	Automatic
Refrigerant		R600a	R600a	R600a
Refrigerant Charge	g	35	40	43
Thermometer		Yes	Yes	Yes
Energy Class		D	D	D
Max Ambient		30°C 55% RH		
Energy Consumption	kWh/24h	1	1,1	1,37
Annual Energy Cons.	kWh/year	365	402	500
Power Supply		13 Amp		
nput Power	W	85	85	85
/oltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	44	42	45
nternal Dimension (WxDxH)	mm	395 x 270 x 440	410 x 380 x 550	560 x 265 x 636
External Dimension (WxDxH)	mm	445 x 440 x 720	480 x 460 x 840	655 x 390 x 930
Packed Dimension (WxDxH)	mm	510 x 530 x 850	580 x 600 x 960	750 x 500 x 1036
		176		

DISPLAY COOLERS Black Tabletop Coolers





Designed for Energy-cans



LED light



BC25CP

Tabletop Cooler

- Hinged glass door
- LED interior light
- Canopy LED light
- Fan assisted cooling
- Self-closing door
- Fixed shelves
- Adjustable feet





Description

The BC range of tabletop coolers is ideal for maximizing impulse sales of beverages such as soft drinks, beer, and energy drinks. It has a contemporary design with a black exterior, a hinged glass door, and LED lighting. It comes in several sizes, with or without an illuminated canopy.

BC30

Tabletop Cooler

- Hinged glass door
- Self-closing door
- Fixed shelves

20

- Adjustable feet
- LED interior light
- Fan assisted cooling

20







BC60

Tabletop Cooler

- Hinged glass door
- Self-closing door
- Adjustable shelves
- Adjustable feet
- LED interior light
- Fan assisted cooling

55

70







		BC25CP	BC30	BC60
Door No & Type		1 hinged self-closing glass door	1 hinged self-closing glass door	1 hinged self-closing glass door
Door Reversible		No	No	No
Shelves No & Type		2 wire shelves black	2 wire shelves black	3 wire shelves black
Shelf Color		Black	Black	Black
Shelf Dimensions		250 x 250 mm	275 x 205 / 135 mm	340 x 270 / 205 mm
Max load on Shelves	kg/m²	196	196	196
Canopy Type		D-Shape	-	-
Temperature Range	°C	+2 to +10	+2 to +10	+2 to +10
Climate Class		4	4	4
Gross / Net Weight	kg	24 / 19	25 / 23	32 / 29
Gross / Net Volume	I	25 / 22	22 / 20	67 / 58
Feet / Legs		4 adjustable feet	4 adjustable feet	4 adjustable feet
Exterior Finish		Black	Black	Black
Interior Finish		Coated aluminium, grey	Coated aluminium, black	Coated aluminium, black
Interior Light		LED	LED	LED
Lock		Yes	Yes	Yes
Type of Controller		Mechanical	Mechanical	Mechanical
Type of Cooling		Fan assisted	Fan assisted	Fan assisted
Type of Defrost		Automatic	Automatic	Automatic
Refrigerant		R600a	R600a	R600a
Refrigerant Charge	g	20	20	24
Thermometer		No	No	No
Energy Class		В	С	С
Max Ambient		30°C 55% RH	30°C 55% RH	30°C 55% RH
Energy Consumption	kWh/24h	0,476	0,55	0,56
Annual Energy Cons.	kWh/year	174	200	204
Power Supply		13 Amp	13 Amp	13 Amp
Input Power	W	75	60	70
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	44	44	44
Internal Dimension (WxDxH)	mm	258 x 270 x 373	280 x 271 x 380	356 x 311 x 557
External Dimension (WxDxH)	mm	332 x 423 x 618	356 x 430 x 491	432 x 496 x 668
Packed Dimension (WxDxH)	mm	380 x 470 x 640	400 x 450 x 520	480 x 550 x 700
40ft Container Load	pcs	450	580	288

DISPLAY COOLERS Tabletop Milk Coolers









6 pre-drilled valves for milk hoses



Adjustable shelves

BC60 MC

Milk Cooler

- Ideal as milk cooler for coffee machines
- Table top cooler with holes, bushings and plugs
- 6 holes 2 in the top, 2 on each side
- Hinged glass door
- Adjustable feet
- Fan assisted cooling
- LED interior light
- Dispensing tubes not supplied



Description

The BC-MC range of milk coolers is ideal to use with your coffee machine. It has 6 holes and closed bushings and plugs, on both sides and on the top of the cabinet, to provide an easy supply of fresh and cooled milk. The tabletop cooler has a glass door, fan assisted cooling, and LED interior lighting. It comes in two sizes.

DID YOU KNOW?

Our BC milk coolers have pre-drilled holes, bushings, and plugs they are ideal to use with your coffee machine.



BC30 MC

Milk Cooler



- Ideal as milk cooler for coffee machines
- Table top cooler with holes, bushings and plugs
- 6 holes 2 in the top, 2 on each side
- Hinged glass door
- Adjustable feet
- Fan assisted cooling
- LED interior light
- Dispensing tubes not supplied

		BC30 MC	BC60 MC
Door No & Type		1 hinged self-closing glass door	1 hinged self-closing glass door
Door Reversible		No	No
Shelves No & Type		1 wire shelves black	3 wire shelves black
Shelf Color		Black	Black
Shelf Dimensions		275 x 205 / 135 mm	340 x 270 / 205 mm
Max load on Shelves	kg/m²	196	196
Temperature Range	°C	+2 to +10	+2 to +10
Climate Class		4	4
Gross / Net Weight	kg	25 / 23	32 / 29
Gross / Net Volume	1	22 / 20	67 / 58
Feet / Legs		4 adjustable feet	4 adjustable feet
Exterior Finish		Black	Black
Interior Finish		Coated aluminium, black	Coated aluminium, black
Interior Light		LED	LED
Lock		Yes	Yes
Type of Controller		Mechanical	Mechanical
Type of Cooling		Fan assisted	Fan assisted
Type of Defrost		Automatic	Automatic
Refrigerant		R600a	R600a
Refrigerant Charge	g	20	24
Thermometer		No	No
Energy Class		С	С
Max Ambient		30°C at 55% RH	30°C at 55% RH
Energy Consumption	kWh/24h	0,55	0,56
Annual Energy Cons.	kWh/year	200	204
Power Supply		13 Amp	13 Amp
Input Power	W	60	70
Voltage / Frequency	V/Hz	220-240/50	220-240/50
Noise Level	dB(A)	44	44
Internal Dimension (WxDxH)	mm	280 x 271 x 380	356 x 311 x 557
External Dimension (WxDxH)	mm	356 x 430 x 491	432 x 496 x 668
Packed Dimension (WxDxH)	mm	400 x 450 x 520	480 x 550 x 700
40ft Container Load	pcs	580	288

1 DISPLAY COOLERS

Absorption Glass Door Minibars







Integrated evaporator



Integrated handle



TM33G-1

Black Minibar

- Reversible glass door
- Flat integrated evaporator
- Silent operation
- Low energy consumption
- Adjustable shelves
- Lock
- · LED interior light



Description

The TM range of absorption minibars is a popular choice for hotel rooms, meeting rooms, and boardrooms. With a silent running absorption refrigeration system, it will not disturb your guests. The minibar comes with internal LED lighting that turns on when the door is opened. The unit can easily be integrated into the existing interior. Choose between solid door or glass door models in different sizes.

DID YOU KNOW?

Absorption operated minibars are silent, allowing guests to get a good night's sleep.



TM44G-1

Black Minibar



- Flat integrated evaporator
- Silent operation
- Low energy consumption
- Adjustable shelves
- Lock
- LED interior light



Door No & Type 1 hinged g Door Reversible Yes	•	1 hinged glass door
Door Payarsible Vos		
Door reversible 162		Yes
Shelves No & Type 1 wire shell	elves grey	2 wire shelves grey
Temperature Range °C +5 to +14		+5 to +14
Gross / Net Weight kg 22.5 / 20.5	5	22 / 20
Gross / Net Volume I 28 / 26		36 / 35
Feet / Legs 4 adjustab	ble feet	4 adjustable feet
Exterior Finish Black		Black
Interior Finish ABS, RAL70	7005	ABS, RAL7005
Interior Light LED		LED
Lock Yes		Yes
Type of Controller Electronic		Electronic
Type of Cooling Absorbtion	on	Absorbtion
Type of Defrost Automatic	С	Automatic
Refrigerant NH3		NH3
Refrigerant Charge g 65		65
Thermometer Yes		Yes
Energy Class G		G
Energy Consumption kWh/24h 0,63		0,63
Annual Energy Cons. kWh/year 230		231
Input Power W 50		50
Voltage / Frequency V/Hz 220-240/50	50-60	220-240/50-60
Internal Dimension (WxDxH) mm 312 x 225	5 x 395	312 x 250 x 455
External Dimension (WxDxH) mm 402 x 429	9 x 500	402 x 453 x 560
Packed Dimension (WxDxH) mm 450 x 470 x	0 x 540	450 x 495 x 600
40ft Container Load pcs 500		360

1 DISPLAY COOLERS

Absorption Solid Door Minibars







Adjustable shelves



Lock



TM55

Minibar Cooler

- Absorption operated cooling system
- Flat integrated evaporator
- Silent operation
- Low energy consumption
- Reversible solid door
- Adjustable shelves, also in door
- LED interior light
- Lock



Description

The TM range of absorption minibars is a popular choice for hotel rooms, meeting rooms, and boardrooms. With a silent running absorption refrigeration system, it will not disturb your guests. The minibar comes with internal LED lighting that turns on when the door is opened. The unit can easily be integrated into the existing interior. Choose between solid door or glass door models in different sizes.

TM33

Minibar Cooler

- Absorption operated cooling system
- Flat integrated evaporator
- Silent operation
- Low energy consumption
- · Reversible solid door
- Adjustable shelves, also in door
- LED interior light
- Lock






TM44

Minibar Cooler

- Absorption operated cooling system
- Flat integrated evaporator
- Silent operation
- Low energy consumption
- Reversible solid door
- Adjustable shelves, also in door
- LED interior light
- Lock



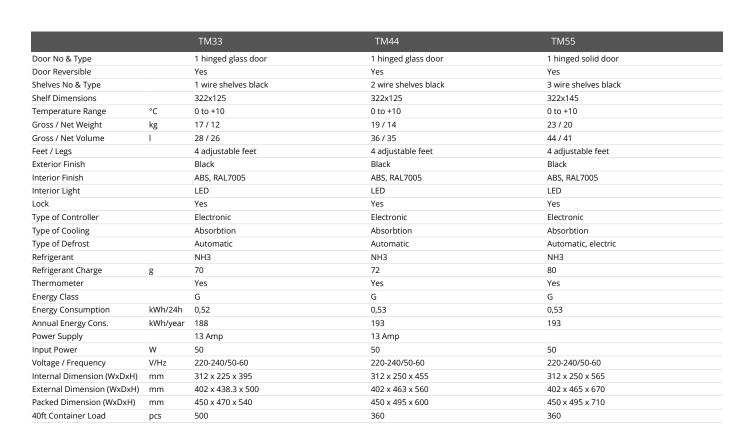

MINIBARS I 72



DISPLAY COOLERS Compressor Minibars



DID YOU KNOW?

Our compressor operated minibars can be programmed to only run when guests are not likely to be in the room.



TM45GC

Glass Door Minibar Cooler



- Great product presentation
- Low energy consumption
- Low noise operation
- Timing function for maximum guest comfort
- SLEEP-mode function for silence period
- · FAST-cool function for immediate cooling
- · Reversible glass door
- LED interior light
- Integrated handle
- Lock





Integrated handle



Display with a button for each feature

Description

The TM range of compressor operated minibars is an excellent choice for hotel rooms. It has a low-noise system that can be timed, so it only runs when the room is likely to be empty. It also features a SLEEP-mode for forced silence as well as a FAST-cool function for immediate cooling. It has an elegant design, can easily be built in, and has a very low energy consumption. Choose between solid door or glass door models in different sizes.

TM35GC

Glass Door Minibar Cooler

- Compressor operated cooling system
- Great product presentation
- Low energy consumption
- Low noise operation
- Timing function for maximum guest comfort
- SLEEP-mode function for silence period
- FAST-cool function for immediate cooling
- Reversible glass door
- LED interior light
- Integrated handle
- Lock





TM45C

Minibar Cooler

- Low energy consumption
- Compressor operated cooling system
- · Low noise operation
- Timing function for maximum guest comfort
- SLEEP-mode function for silence period
- FAST-cool function for immediate cooling
- Adjustable shelves, also in door
- Reversible solid door
- LED interior light
- Integrated handle
- Lock



		TM35C	TM35GC	TM45C	TM45GC
Door No & Type		1 hinged solid door	1 hinged glass door	1 hinged solid door	1 hinged glass door
Door Reversible		Yes	Yes	Yes	Yes
Shelves No & Type		1 plastic shelf	1 plastic shelf	2 plastic shelves	2 plastic shelves
Temperature Range	°C	+5 to +10	+5 to +14	+5 to +10	+5 to +14
Climate Class		4	4	4	4
Gross / Net Weight	kg	20.5 / 19.5	24 / 23	21 / 20	26 / 24
Gross / Net Volume	I	27 / 24	27 / 24	38 / 34	38 / 34
Feet / Legs		Adjustable feet	Adjustable feet	Adjustable feet	Adjustable feet
Exterior Finish		Black	Black	Black	Black
Interior Finish		White	White	White	White
Interior Light		LED	LED	LED	LED
Lock		Yes	Yes	Yes	Yes
Type of Controller		Electronic	Electronic	Electronic	Electronic
Type of Cooling		Static	Static	Static	Static
Type of Defrost		Automatic	Automatic	Automatic	Automatic
Refrigerant		R600a	R600a	R600a	R600a
Refrigerant Charge	g	24	24	26	26
Thermometer		No	No	No	No
Energy Class		D	G	D	G
Max Ambient		30°C at 55% RH	30°C 55% RH	30°C at 55% RH	30°C 55% RH
Energy Consumption	kWh/24h	0,15	0,31	0,16	0,35
Annual Energy Cons.	kWh/year	55	113	57	128
Power Supply		13 Amp	13 Amp	13 Amp	13 Amp
Input Power	W	65	65	65	65
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	38	38	38	38
Internal Dimension (WxDxH)	mm	310 x 207 x 397	310 x 207 x 397	310 x 300 x 455	310 x 300 x 455
External Dimension (WxDxH)	mm	402 x 440 x 510	402 x 425 x 505	402 x 500 x 565	402 x 485 x 565
Packed Dimension (WxDxH)	mm	450 x 475 x 550	450 x 475 x 550	450 x 535 x 620	450 x 535 x 620
40ft Container Load	pcs	375	375	330	330

MINIBARS I 74



Compressor Minibars - Drawer



Extra drawer for easy overview



Display with a button for each feature



TD50C

Minibar Drawer

- Compressor operated cooling system
- Low energy consumption
- Low noise operation
- Great product presentation
- LED interior light
- No front/handle ready to be build in
- SLEEP-mode function for silence period



Description

The TD range of minibar drawers is great for hotel rooms. Fit it into for example a nightstand and offer your guests easy access to cold beverages and snacks. The drawer features a low-noise compressor operated system. It has an elegant design, can easily be built in, and has a low energy consumption.

DID YOU KNOW?

Compressor operated minibars can keep products chilled in warmer surroundings compared to absorption operated minibars.



TD50A

Minibar Drawer



- Compressor operated cooling system
- Low energy consumption
- Low noise operation
- SLEEP-mode function for silence period
- Great product presentation
- LED interior light

		TD50A	TD50C
Temperature Range	°C	+5 to +12	+5 to +12
Climate Class		4	4
Gross / Net Weight	kg	24 / 22	24 / 22
Gross / Net Volume	I	52 / 45	52 / 45
Feet / Legs		Adjustable feet	Adjustable feet
Exterior Finish		Black	Black
Interior Finish		White	White
Interior Light		LED	LED
Lock		No	No
Type of Controller		Electronic	Electronic
Type of Cooling		Static	Static
Type of Defrost		Automatic	Automatic
Refrigerant		R600a	R600a
Refrigerant Charge	g	20	20
Thermometer		No	No
Energy Class		G	G
Energy Consumption	kWh/24h	0,29	0,29
Annual Energy Cons.	kWh/year	106	106
Input Power	W	40	40
Voltage / Frequency	V/Hz	220-240/50	220-240/50
Noise Level	dB(A)	38	38
Internal Dimension (WxDxH)	mm	470 x 395 x 332	470 x 395 x 332
External Dimension (WxDxH)	mm	550 x 508 x 420	550 x 508 x 420
Packed Dimension (WxDxH)	mm	590 x 520 x 470	590 x 520 x 470
40ft Container Load	pcs	430	430

MINIBARS I 76

Wine Coolers with Frameless Doors





Wooden drawing shelves



Presentation shelves available as option

TFW400-2F

Wine Cooler

163

- Frameless glass door
- 2 temperature zones with a max. of 10°C variation
- Energy efficient cooling system
- Very low noise level
- LED interior light with switch
- Reversible door
- Curved stainless steel handle
- Wooden shelves
- High/low temperature alarm
- Presentation shelves available as option



Description


The TFW-F range of frameless wine display coolers offers an elegant solution to storing and displaying wine. It has a contemporary design with an edge-to-edge glass door, soft LED lighting, and slide out wooden shelves. The wine cooler also features a modern cooling system that reduces the heat, noise, and energy consumption of the cabinet.





TFW200-2F

Wine Cooler



- 2 temperature zones with a max. of 7°C variation
- Energy efficient cooling system
- Very low noise level
- LED interior light with switch
- Reversible door
- Curved stainless steel handle
- Wooden shelves
- High/low temperature alarm



46

TFW300-2F

Wine Cooler

- Frameless glass door
- 2 temperature zones with a max. of 10°C variation
- Energy efficient cooling system
- Very low noise level
- LED interior light with switch
- Reversible door
- Curved stainless steel handle
- Wooden shelves
- Presentation shelves available as option
- High/low temperature alarm





119

		TFW200-2F	TFW200-F	TFW300-2F	TFW400-2F	TFW400-F
Door No & Type		1 hinged frameless door				
Door Reversible		Yes	Yes	Yes	Yes	Yes
Shelves No & Type		6 wooden wine shelves	4 wooden wine shelves	10 wooden wine shelves	14 wooden wine shelves	15 wooden wine shelves
Max load on Shelves	kg/m²	35	35	35	35	35
Temperature Range	°C	+5 to +10 / +10 to +18	+5 to +18	+5 to +10 / +10 to +18	+5 to +10 / +10 to +18	+5 to +18
Climate Class		4	4	4	4	4
Gross / Net Weight	kg	49 / 44	49 / 44	94 / 89	111 / 106	111 / 106
Gross / Net Volume	1	155 / 131	155 / 141	270 / 250	416 / 350	426 / 350
Feet / Legs		4 adjustable feet				
Exterior Finish		Black	Black	Black	Black	Black
Interior Finish		Black ABS				
Interior Light		LED	LED	LED	LED	LED
Type of Controller		Electronic	Electronic	Electronic	Electronic	Electronic
Type of Cooling		Fan assisted				
Type of Defrost		Automatic	Automatic	Automatic	Automatic	Automatic
Refrigerant		R600a	R600a	R600a	R600a	R600a
Refrigerant Charge	g	35	35	60	55	55
Thermometer		Yes	Yes	Yes	Yes	Yes
Energy Class		G	G	G	G	G
Max Ambient		30°C at 55% RH				
Energy Consumption	kWh/24h	0,4	0,36	0,41	0,48	0,43
Annual Energy Cons.	kWh/year	145	130	150	175	158
Power Supply		13 Amp				
Input Power	W	160	160	155	220	220
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	40	40	40	40	39
Internal Dimension (WxDxH)	mm	520 x 445 x 605	520 x 445 x 605	510 x 540 x 1130	515 x 532 x 1585	515 x 532 x 1585
External Dimension (WxDxH)	mm	595 x 570 x 820	595 x 570 x 820	595 x 680 x 1390	595 x 680 x 1760	595 x 680 x 1760
Packed Dimension (WxDxH)	mm	670 x 670 x 880	670 x 670 x 880	650 x 750 x 1590	650 x 760 x 2000	650 x 760 x 2000
40ft Container Load	pcs	108	108	54	54	54

MINIE COOLEDS

Wine Coolers with Stainless Steel Doors







Strong handle



Presentation shelves available as option

TFW400-2S

Wine Cooler

- Stainless steel door frame and handle
- 2 temperature zones with a max. of 10°C variation
- Energy efficient cooling system
- Very low noise level
- LED interior light with switch
- Reversible glass door
- Wooden shelves
- High/low temperature alarm
- Presentation shelves available as option



Description

The TFW-S range of stainless steel wine display coolers offers a contemporary solution to displaying and storing wine bottles. It has an elegant design with a stainless steel front, black interior, soft LED lighting, and slide out wooden shelves. The modern cooling system is very efficient and reduces the noise, heat, and energy consumption of the cooler.





G G





TFW200-2S

Wine Cooler

- Stainless steel door frame and handle
- 2 temperature zones with a max. of 7°C variation
- Energy efficient cooling system
- Very low noise level
- LED interior light with switch
- Reversible glass door
- Wooden shelves
- High/low temperature alarm

TFW100-

Wine Cooler

- 1 temperature zone
- Suitable for red or white wine
- Stainless steel door frame and handle
- Energy efficient cooling system
- Very low noise level
- LED interior light with switch
- Reversible glass door
- High/low temperature alarm
- Wooden shelves

00-S	F
a a Laur	1

		TFW100-S	TFW200-2S	TFW200-S	TFW400-2S	TFW400-S
Door No & Type		1 hinged glass door	1 hinged glass door	1 hinged glass door	1 hinged glass door	1 hinged glass door
Door Reversible		Yes	Yes	Yes	Yes	Yes
Shelves No & Type		6 wooden wine shelves	6 wooden wine shelves	4 wooden wine shelves	14 wooden wine shelves	15 wooden wine shelves
Max load on Shelves	kg/m²	35	35	35	35	35
Temperature Range	°C	+5 to +18	+5 to +10 / +10 to +18	+5 to +18	+5 to +10 / +10 to +18	+5 to +18
Climate Class		4	4	4	4	4
Gross / Net Weight	kg	31 / 26	49 / 44	49 / 44	111 / 106	111 / 106
Gross / Net Volume	1	80 / 57	155 / 131	155 / 141	416 / 350	426 / 350
Feet / Legs		4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Exterior Finish		Black	Black	Black	Black	Black
Interior Finish		Black ABS	Black ABS	Black ABS	Black ABS	Black ABS
Interior Light		LED	LED	LED	LED	LED
Type of Controller		Electronic	Electronic	Electronic	Electronic	Electronic
Type of Cooling		Fan assisted	Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost		Automatic	Automatic	Automatic	Automatic	Automatic
Refrigerant		R600a	R600a	R600a	R600a	R600a
Refrigerant Charge	g	25	35	35	55	55
Thermometer		Yes	Yes	Yes	Yes	Yes
Energy Class		F	G	G	G	G
Max Ambient		30°C at 55% RH	30°C at 55% RH	30°C at 55% RH	30°C at 55% RH	30°C at 55% RH
Energy Consumption	kWh/24h	0,27	0,4	0,36	0,48	0,43
Annual Energy Cons.	kWh/year	98	145	130	175	158
Power Supply		13 Amp	13 Amp	13 Amp	13 Amp	13 Amp
Input Power	W	90	160	160	220	220
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	40	40	40	40	39
Internal Dimension (WxDxH)	mm	227 x 492 x 658	520 x 445 x 605	520 x 445 x 605	515 x 532 x 1585	515 x 532 x 1585
External Dimension (WxDxH)	mm	295 x 570 x 860	595 x 570 x 820	595 x 570 x 820	595 x 680 x 1760	595 x 680 x 1760
Packed Dimension (WxDxH)	mm	340 x 650 x 920	670 x 670 x 880	670 x 670 x 880	650 x 760 x 2000	650 x 760 x 2000
40ft Container Load	pcs	216	108	108	54	54

NE COOLERS I 80

Bottle Coolers Suitable for Wine







Adjustable shelves



Presentation shelves available as option

CPP1380E

Bottle Cooler Suitable for Wine

- Reversible solid door
- 1 temperature zone
- Adjustable shelves
- Black interior and exterior
- Adjustable feet
- Lock



Description

The CPP bottle cooler range is an economic and great way of storing wine. It has black interior and exterior, black pvc door and comes with 6 adjustable wooden wine shelves. It features automatic defrost and a fan assisted cooling system, easily controlled by an electronic thermostat.



CPV1380E

Display Cooler Suitable for Wine

- Hinged glass door
- 1 temperature zone
- LED light
- Adjustable shelves
- Tinted glass door for protection of wine
- Reversible door
- Black interior and exterior
- Lock
- Presentation shelves available as option







SC85 BLACK

Black Undercounter Wine Cooler

- Fan assisted cooling
- Black interior and exterior
- Tinted glass door for protection of wine
- Adjustable shelves
- LED interior light
- Curved reversible tinted glass door
- Hinged glass door
- Adjustable feet
- Lock





/5		IJ	
	2	2	

		CPP1380E	CPV1380E	SC85 BLACK
Door No & Type		1 hinged solid door	1 hinged glass door	1 hinged curved glass door
Door Reversible		Yes	Yes	Yes
Shelves No & Type		6 wooden wine shelves	6 wooden wine shelves	4 wire wine shelves
Shelf Dimensions		490 x 360 mm	490 x 360 mm	
Temperature Range	°C	+1 to +18	+1 to +18	+2 to +10
Climate Class		4	4	4
Gross / Net Weight	kg	79 / 72	83 / 78	38 / 33
Gross / Net Volume	I	372 / 350	372 / 350	92 / 85
Feet / Legs		2 adjustable feet	2 adjustable feet	4 adjustable feet
Castors		2 rollers	2 rollers	
Exterior Finish		Black	Black	Black
Interior Finish		Black ABS	Black ABS	Black ABS
Interior Light		No	LED	LED
Lock		Yes	Yes	Yes
Type of Controller		Electronic	Electronic	Mechanical
Type of Cooling		Fan assisted	Fan assisted	Fan assisted
Type of Defrost		Automatic	Automatic	Automatic
Refrigerant		R600a	R600a	R600a
Refrigerant Charge	g	70	70	28
Thermometer		Yes	Yes	No
Energy Class		D	D	С
Max Ambient		30°C 55% RH	30°C 55% RH	30°C at 55% RH
Energy Consumption	kWh/24h	1,79	1,96	1,06
Annual Energy Cons.	kWh/year	655	713,58	387
Power Supply		13 Amp	13 Amp	13 Amp
Input Power	W	180	180	165
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	42	42	40
Internal Dimension (WxDxH)	mm	470 x 440 x 1555	470 x 440 x 1555	410 x 415 x 630
External Dimension (WxDxH)	mm	595 x 640 x 1840	595 x 640 x 1840	503 x 567 x 775
Packed Dimension (WxDxH)	mm	680 x 710 x 1940	680 x 710 x 1940	570 x 610 x 810
40ft Container Load	pcs	54	54	228

DISPLAY COOLERS Wine Dispensers





2 taps



Adjustable shelves

DKS95-2/20L

Wine Dispenser


- For BiB wine 2x20 l.
- Stainless steel interior
- Stainless steel shelves
- Taps for both serving in wine glass and decanter
- Bordeaux exterior
- Adjustable feet





DKS95-3/10L

Wine Dispenser



- Stainless steel interior
- Stairliess steel interior
- Stainless steel shelves
- Taps for both serving in wine glass and decanter
- Bordeaux exterior
- Adjustable feet



		DKS95-2/20L	DKS95-3/10L
10 l BIB p	pcs		3
20 l BIB p	pcs	2	
Door No & Type		1 hinged solid door	1 hinged solid door
Door Reversible		No	No
Shelves No & Type		2 SS304 shelves	3 SS304 shelves
Shelf Dimensions		290 x 430 mm	250 x 350 mm
Temperature Range	°C	+3 to +9	+3 to +9
Climate Class		4	4
Gross / Net Weight k	kg	50 / 46	45 / 40
Gross / Net Volume	I	120 / 102	90 / 80
Feet / Legs		4 adjustable feet	4 adjustable feet
Exterior Finish		Red RAL3005	Red RAL3005
Interior Finish		SS304	SS304
Interior Light		No	No
Lock		No	No
Type of Controller		Mechanical 3-9 °C	Mechanical 3-9 °C
Type of Cooling		Static	Static
Type of Defrost		Automatic	Automatic
Refrigerant		R600a	R600a
Refrigerant Charge	g	30	30
Thermometer		No	No
Energy Class		F	E
Energy Consumption k	kWh/24h	0,28	0,42
Annual Energy Cons. k	kWh/year	104	154
Input Power V	W	80	80
Voltage / Frequency	V/Hz	220-240/50	220-240/50
Noise Level	dB(A)	40	40
Internal Dimension (WxDxH)	mm	295 x 495 x 805	255 x 415 x 825
External Dimension (WxDxH) r	mm	392 x 595 x 1120	350 x 455 x 1145
Packed Dimension (WxDxH)	mm	430 x 660 x 1180	400 x 600 x 1200
		150 X 000 X 1 100	100 X 000 X 1200

/INE COOLERS I 84

Display coolers Can Coolers



Internal fan and basket




Strong castors



Can Cooler

- · Fan assisted cooling
- Designed for canned beverages
- Fast pull-down of temperature
- Includes basket
- Flip-flop lid
- · Well suited for branding
- Strong castors





Description

The CC range of can coolers is perfect for stimulating impulse sales. They are available in several sizes, in black or white. The can coolers are compact and easy to move around on strong castors. They have fan assisted cooling for a fast pull-down time and are delivered with a basket. Release their full potential by applying branding to attract the eyes of thirsty or hungry customers, depending on what you have to offer. Also available in a freezer option.

TEFCOLD®

CC77

Can Cooler

- Fan assisted cooling
- Designed for canned beverages
- Fast pull-down of temperature
- Includes basket
- Flip-flop lid
- Well suited for branding
- Strong castors





VOC100

Can Cooler

- Great product visibility
- LED illuminated canopy
- Well suited for branding
- 7 gliding feet
- Castors optional
- Ventilated cooling
- Fast pull-down of temperature



		CC45	CC55	CC77	VOC100
Lid No & Type		1 transparent acrylic flip-flop lid	1 transparent acrylic flip-flop lid	1 transparent acrylic flip-flop lid	no
Total Display Area	m²	0,1	0,1	0,15	0,75
Basket No & Type		1 Wire basket, grey	2 Wire baskets	1 Wire basket, grey	
Temperature Range	°C	+2 to +12	+2 to +12	+2 to +12	+2 to +12
Climate Class		4	4	4	4
Gross / Net Weight	kg	25 / 22	30 / 20	31 / 26	31 / 29
Gross / Net Volume	1	53 / 50	80 / 78	80 / 72	110 / 103
eet / Legs					7 gliding feet
Castors		4 castors, 1 lockable	4 castors, 1 lockable	4 castors, 1 lockable	
Exterior Finish		Black	White	Black	Grey RAL9006
nterior Finish		Powder coated steel	Powder coated steel	Powder coated steel	Powder coated steel, SAC
nterior Light		No	No	No	LED
Type of Controller		Mechanical	Mechanical	Mechanical	Electronic
Type of Cooling		Fan assisted	Fan assisted	Fan assisted	Ventilated
Type of Defrost		Automatic	Automatic	Automatic	Automatic
Refrigerant		R600a	R600a	R600a	R600a
Refrigerant Charge	g	40	45	45	55
Thermometer		No	No	No	Yes
Energy Class		В	В	В	D
Max Ambient		30°C 55% RH	30°C 55% RH	30°C 55% RH	30°C 55% RH
Energy Consumption	kWh/24h	0,7	0,61	0,67	2,6
Annual Energy Cons.	kWh/year	256	223	245	949
Power Supply		13 Amp	13 Amp	13 Amp	13 Amp
Input Power	W	76	76	112	160
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	45	45	45	42
nternal Dimension (WxDxH)	mm	375 x 375 x 470	380 x 380 x 655	450 x 450 x 475	520 x 345 x 570
External Dimension (WxDxH)	mm	457 x 457 x 830	457 x 457 x 1076	567 x 567 x 830	660 x 460 x 970
Packed Dimension (WxDxH)	mm	480 x 480 x 850	480 x 480 x 1120	580 x 580 x 880	700 x 500 x 1150
40ft Container Load	pcs	250	160	240	128

COOLERS I 86

DISPLAY COOLERS ISLAND COOLERS





PDC126 VS SL LED

Black impulse cooler

- Energy saving variable speed compressor
- Plexi glass sides for great product visibility
- Impressive storage space
- Tilting function for better product display
- LED interior light
- 4 solid castors, 2 with brakes
- Bumper bars on 4 sides
- Maintenance free condenser







Sliding glass lids

LED light

Description

The PDC range of black impulse coolers offer great visibility of the products inside, as it has glass on all four sides. It is a flexible plug-in cooling solution, as the solid castors make it easy to move the unit to different locations in the store. Ideal for impulse sales of berries, vegetables, sandwiches, and other grab and go foods.



PDC90SL-2

Black impulse cooler



- Sliding glass lids
- Plexi glass sides for great product visibility
- Impressive storage space
- Optimized airflow for stable temperature
- Strong wheels for mobility
- Bumper bars on 4 sides

		PDC126 VS SL LED	PDC90SL-2
Lid No & Type		2 curved sliding glass lid	2 flat sliding glass lids
Total Display Area	m²	1,51	0,67
Temperature Range	°C	-1 to +5	-1 to +5
Climate Class		3	3
Gross / Net Weight	kg	176 / 133	152 / 105
Gross / Net Volume	1	408 / 190	153 / 105
Castors		4 wheels, 2 with brake	4 castors
Exterior Finish		Black / Glass	Black
Interior Finish		Stainless steel / Glass	Stainless steel
Interior Light		2 x Vertically LED	No
Lock		No	No
Type of Controller		Electronic	Electronic
Type of Cooling		Ventilated	Ventilated
Type of Defrost		Automatic-Off Cycle	Automatic
Refrigerant		R290	R290
Refrigerant Charge	g	150	145
Thermometer		Yes	Yes
Energy Class		D	E
Max Ambient		25°C at 60% RH	25°C at 60% RH
Energy Consumption	kWh/24h	5,25	4,61
Annual Energy Cons.	kWh/year	1916	1682,8
Power Supply		13 Amp	13 Amp
Input Power	W	700	750
Voltage / Frequency	V/Hz	220-240/50	220-240/50
Noise Level	dB(A)	52	50
Internal Dimension (WxDxH)	mm	1210 x 1080 x 342	860 x 555 x 220
External Dimension (WxDxH)	mm	1405 x 1210 x 1005	900 x 845 x 971
Packed Dimension (WxDxH)	mm	1335 x 1170 x 1140	930 x 885 x 1185
40ft Container Load	pcs	36	52

I AND COOLEDS

Display Counters - Extra Shelf







Pastry display


Sliding doors

D A

LPD1503F/BLACK

Refrigerated Display Counter

- Extra shelf space
- Stainless steel and gloss black glass frame
- Double glazed glass
- · Anti mist front glass
- · LED light under each shelf
- Rear glass sliding doors
- Ventilated cooling
- · Flat top/glass top

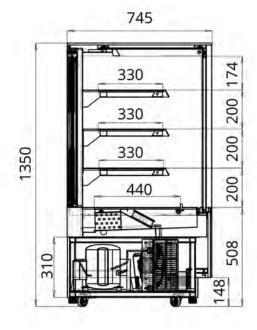

Description

The LPD-3F range of refrigerated display counters has a flat double glazed glass front/top and comes with an extra shelf. It is a premium design made with high quality materials and is available in several sizes. It has great features such as 3 frosted glass shelves with LED lighting underneath, an anti-mist front, and an efficient ventilated cooling system. Sliding doors provide easy access to the content.



D A



LPD1203F/BLACK

Refrigerated Display Counter

- Extra shelf space
- Stainless steel and gloss black glass frame
- Double glazed glass
- Anti mist front glass
- LED light under each shelf
- Rear glass sliding doors
- Ventilated cooling
- Flat top/glass top

LPD903F/BLACK

Refrigerated Display Counter



- Extra shelf space
- Stainless steel and gloss black glass frame
- Double glazed glass
- Anti mist front glass
- LED light under each shelf
- Rear glass sliding doors
- Ventilated cooling
- Flat top/glass top

Shelf Dimensions 3 glass shelves + base 3 glass shelves + base 3 glass shelves + base Shelf Dimensions 105x33 / 105x33 / 105x33 / 105x33 / 105x33 / 105x33 / 135x33	· Flat top/glass to	JΡ		· Flat top/glass top	
Shelf Dimensions 3 glass shelves + base 3 glass shelves + base 3 glass shelves + base Shelf Dimensions 105x33 / 135x33			LPD1203F/BLACK	LPD1503F/BLACK	LPD903F/BLACK
Shelf Dimensions 105x33 / 105x33 / 105x33 / 105x34 / 105x34 135x33 / 135x33 / 135x33 / 135x33 / 135x33 / 175x33 / 75x33 / 75x34 / 20x33 / 20x	Door No & Type		2 sliding glass doors	2 sliding glass doors	2 sliding glass doors
Total Display Area m² 2,21 2,7 1,72 Temperature Range °C +2 to +8 +2 to +8 +2 to +8 +2 to +8 2 to +8 Climate Class "S 3 3 3 3 Gross / Net Weight kg 271 / 253 318 / 253 229 / 180 200 Gross / Net Volume I 530 / 258 680 / 400 390 / 210 4 Gest / Net Volume I 530 / 258 680 / 400 390 / 210 4 Gest / Net Volume I 530 / 258 680 / 400 390 / 210 4 Gest Yelve In Leg 4 castors 4 castors 4 castors 4 castors 4 castors Exterior Finish "Stainless steel / Glass 5 tainless steel / Glass 5 tainless steel / Glass 1 teiner 1 teiner Class 5 tainless steel / Glass 1 teiner 1 teiner Class 5 tainless steel / Glass 1 teiner Class 1	Shelves No & Type		3 glass shelves + base	3 glass shelves + base	3 glass shelves + base
Temperature Range °C +2 to +8 +2 to +8 +2 to +8 2 to +8 Climate Class 3 3 3 3 Gross / Net Weight kg 271 / 253 318 / 253 229 / 180 Gross / Net Volume I 530 / 258 680 / 400 390 / 210 Feet / Legs 4 adjustable feet 4 adjustable feet 4 adjustable feet Castors 4 castors 4 castors 4 castors Exterior Finish 5 tainless steel / Glass 5 tainless steel / Glass 5 tainless steel / Glass Interior Finish EED LED LED LED Type of Controller Electronic Electronic Electronic Electronic Type of Cooling Ventilated Ventilated Ventilated Type of Defrost Automatic Automatic Automatic Refrigerant Charge g 130 140 110 Therromoter Yes Yes Yes Energy Consumption kWh/yes 138 83 Annual Energ	Shelf Dimensions		105x33 / 105x33 / 105x33 / 105x44	135x33 / 135x33 / 135x33 / 135x44	75x33 / 75x33 / 75x33 / 75x44
Climate Class	Total Display Area	m²	2,21	2,7	1,72
Gross / Net Weight kg 271 / 253 318 / 253 229 / 180 Gross / Net Volume I 530 / 258 680 / 400 390 / 210 Feet / Legs 4 adjustable feet 4 adjustable feet 4 adjustable feet Castors 4 castors 4 castors 4 castors Exterior Finish 5 tainless steel / Glass Stainless steel / Glass Stainless steel / Glass Interior Light LED LED LED LED Type of Controller Electronic Electronic Electronic Type of Cooling Ventilated Ventilated Ventilated Type of Defrost Automatic Automatic Automatic Refrigerant Charge g 130 140 110 Thermometer Yes Yes Yes Energy Consumption kWh/24h 13,89 16,35 11,83 Input Power W 530 685 530 Voltage / Frequency V/Hz 220-240/50 220-240/50 220-240/50 Voltage / Frequency	Temperature Range	°C	+2 to +8	+2 to +8	+2 to +8
Gross / Net Volume I 530 / 258 680 / 400 390 / 210 Feet / Legs 4 adjustable feet 4 adjustable feet 4 adjustable feet Castors 4 castors 4 castors 4 castors Exterior Finish 5 tainless steel / Glass 5 tainless steel / Glass 5 tainless steel / Glass Interior Light LED LED LED LED Type of Controller Electronic Electronic Electronic Type of Defrost Ventilated Ventilated Ventilated Refrigerant Re290 R290 R290 Refrigerant Charge g 130 140 110 Thermometer Yes Yes Yes Energy Class D D D Energy Consumption kWh/24h 13.89 15.35 11.83 Annual Energy Cons kWh/24h 13.89 685 530 Voltage / Frequency V/Hz 20-240/50 220-240/50 220-240/50 Noise Level d8(8) 48 48 <td>Climate Class</td> <td></td> <td>3</td> <td>3</td> <td>3</td>	Climate Class		3	3	3
Feet / Legs 4 adjustable feet 4 adjustable feet 4 adjustable feet Castors 4 castors 4 castors 4 castors Exterior Finish 5 tainless steel / Glass 5 tainless steel / Glass 5 tainless steel / Glass Interior Finish 5 tainless steel / Glass 5 tainless steel / Glass 5 tainless steel / Glass Interior Light LED LED LED LED Type of Controller 6 lectronic Electronic LED LED LED Type of Cooling Ventilated Automatic Automatic<	Gross / Net Weight	kg	271 / 253	318 / 253	229 / 180
Castors 4 castors 4 castors 4 castors Exterior Finish Stainless steel / Glass Stainless steel / Glass Stainless steel / Glass Interior Finish Stainless steel / Glass Stainless steel / Glass Stainless steel / Glass Interior Light LED LED LED Type of Controller Electronic Electronic Type of Cooling Ventilated Ventilated Ventilated Type of Defrost Automatic Automatic Automatic Refrigerant R290 R290 R290 Refrigerant Charge g 130 140 110 Thermometer Yes Yes Yes Energy Class D D D Energy Consumption kWh/24h 13,89 16,35 11,83 Annual Energy Cons. kWh/year 5070 5968 4318 Input Power W 530 202-240/50 220-240/50 Voltage / Frequency V/Hz 220-240/50 220-240/50 220-240/50	Gross / Net Volume	1	530 / 258	680 / 400	390 / 210
Exterior Finish Stainless steel / Glass Stainless steel / Glass Stainless steel / Glass Stainless steel / Glass Interior Finish Stainless steel / Glass Stainless steel / Glass Stainless steel / Glass Interior Light LED LED LED Type of Controller Electronic Electronic Electronic Type of Cooling Ventilated Ventilated Ventilated Type of Defrost Automatic Automatic Automatic Refrigerant R290 R290 R290 R290 Refrigerant Charge g 130 140 110 Thermometer Yes Yes Yes Energy Class D D D Energy Consumption kWh/24h 13,89 16,35 11,83 Annual Energy Cons. kWh/year 5070 5968 4318 Input Power W 530 685 530 Voltage / Frequency V/Hz 220-240/50 220-240/50 Noise Level dB(A) 48	Feet / Legs		4 adjustable feet	4 adjustable feet	4 adjustable feet
Interior Finish Stainless steel / Glass Stainless steel / Glass Stainless steel / Glass Interior Light LED LED LED Type of Controller Electronic Electronic Type of Cooling Yentilated Yentilated Type of Defrost Automatic Automatic Refrigerant Re90 Re290 Refrigerant Charge g 130 140 110 Thermometer Yes Yes Yes Energy Class D D D Energy Consumption kWh/24h 13,89 16,35 11,83 Annual Energy Cons. kWh/year 5070 5968 4318 Input Power W 530 685 20-204/50 Noise Level dB(A) 48 48 Internal Dimension (WxDxH) mm 1140 x 510 x 774 1440 x 510 x 774 840 x 510 x 774 External Dimension (WxDxH) mm 1280 x 745 x 1350 1580 x 820 x 1480 980 x 820 x 1480	Castors		4 castors	4 castors	4 castors
Interior Light LED LED LED LED Type of Controller Electronic Electronic Electronic Type of Cooling Ventilated Ventilated Ventilated Type of Defrost Automatic Automatic Automatic Refrigerant R290 R290 R290 Refrigerant Charge g 130 140 110 Thermometer Yes Yes Yes Energy Class D D D Energy Consumption kWh/24h 13,89 16,35 11,83 Annual Energy Cons. kWh/year 5070 5968 318 Input Power W 530 685 530 Voltage / Frequency V/Hz 20-240/50 220-240/50 220-240/50 Noise Level dB(A) 48 48 Internal Dimension (WxDxH) mm 1140 x 510 x 774 1440 x 510 x 774 840 x 510 x 745 x 1350 Packed Dimension (WxDxH) mm 1205 x 745 x 1350 1580 x 820 x 1480	Exterior Finish		Stainless steel / Glass	Stainless steel / Glass	Stainless steel / Glass
Type of Controller Electronic Electronic Type of Cooling Ventilated Ventilated Ventilated Type of Defrost Automatic Automatic Automatic Refrigerant R290 R290 R290 Refrigerant Charge g 130 140 110 Thermometer Yes Yes Yes Energy Class D D D Energy Consumption kWh/24h 13,89 16,35 11,83 Annual Energy Cons. kWh/year 5070 5968 4318 Input Power W 530 685 530 Voltage / Frequency V/Hz 220-240/50 220-240/50 220-240/50 Noise Level dB(A) 48 48 48 Internal Dimension (WxDxH) mm 1140 x 510 x 774 1440 x 510 x 774 840 x 510 x 774 External Dimension (WxDxH) mm 1205 x 745 x 1350 1505 x 745 x 1350 905 x 745 x 1350 Packed Dimension (WXDxH) mm 1280 x 820 x 1480	Interior Finish		Stainless steel / Glass	Stainless steel / Glass	Stainless steel / Glass
Type of Cooling Ventilated Ventilated Ventilated Type of Defrost Automatic Automatic Automatic Refrigerant R290 R290 R290 Refrigerant Charge g 130 140 110 Thermometer Yes Yes Yes Energy Class D D D Energy Consumption kWh/24h 13,89 16,35 11,83 Annual Energy Cons. kWh/year 5070 5968 4318 Input Power W 530 685 530 Voltage / Frequency V/Hz 220-240/50 220-240/50 220-240/50 Noise Level dB(A) 48 48 48 Internal Dimension (WxDxH) mm 1140 x 510 x 774 1440 x 510 x 774 840 x 510 x 774 External Dimension (WxDxH) mm 1205 x 745 x 1350 1505 x 745 x 1350 905 x 745 x 1350 Packed Dimension (WxDxH) mm 1280 x 820 x 1480 1580 x 820 x 1480 980 x 820 x 1480	Interior Light		LED	LED	LED
Type of Defrost Automatic Automatic Refrigerant R290 R290 Refrigerant Charge g 130 140 110 Thermometer Yes Yes Yes Energy Class D D D Energy Consumption kWh/24h 13,89 16,35 11,83 Annual Energy Cons. kWh/year 5070 5968 4318 Input Power W 530 685 530 Voltage / Frequency V/Hz 220-240/50 220-240/50 220-240/50 Noise Level dB(A) 48 48 48 Internal Dimension (WxDxH) mm 1140 x 510 x 774 1440 x 510 x 774 840 x 510 x 774 External Dimension (WxDxH) mm 1205 x 745 x 1350 1505 x 745 x 1350 905 x 745 x 1350 Packed Dimension (WxDxH) mm 1280 x 820 x 1480 1580 x 820 x 1480 980 x 820 x 1480	Type of Controller		Electronic	Electronic	Electronic
Refrigerant R290 R290 R290 Refrigerant Charge g 130 140 110 Thermometer Yes Yes Yes Energy Class D D D Energy Consumption kWh/24h 13,89 16,35 11,83 Annual Energy Cons. kWh/year 5070 5968 4318 Input Power W 530 685 530 Voltage / Frequency V/Hz 220-240/50 220-240/50 220-240/50 Noise Level dB(A) 48 48 48 Internal Dimension (WxDxH) mm 1140 x 510 x 774 1440 x 510 x 774 840 x 510 x 774 External Dimension (WxDxH) mm 1205 x 745 x 1350 1505 x 745 x 1350 905 x 745 x 1350 Packed Dimension (WxDxH) mm 1280 x 820 x 1480 1580 x 820 x 1480 980 x 820 x 1480	Type of Cooling		Ventilated	Ventilated	Ventilated
Refrigerant Charge g 130 140 110 Thermometer Yes Yes Yes Energy Class D D D Energy Consumption kWh/24h 13,89 16,35 11,83 Annual Energy Cons. kWh/year 5070 5968 4318 Input Power W 530 685 530 Voltage / Frequency V/Hz 220-240/50 220-240/50 220-240/50 Noise Level dB(A) 48 48 48 Internal Dimension (WxDxH) mm 1140 x 510 x 774 1440 x 510 x 774 840 x 510 x 774 External Dimension (WxDxH) mm 1205 x 745 x 1350 1505 x 745 x 1350 905 x 745 x 1350 Packed Dimension (WxDxH) mm 1280 x 820 x 1480 1580 x 820 x 1480 980 x 820 x 1480	Type of Defrost		Automatic	Automatic	Automatic
Thermometer Yes Yes Yes Energy Class D D D D Energy Consumption kWh/24h 13,89 16,35 11,83 Annual Energy Cons. kWh/year 5070 5968 4318 Input Power W 530 685 530 Voltage / Frequency V/Hz 220-240/50 220-240/50 220-240/50 Noise Level dB(A) 48 48 48 Internal Dimension (WxDxH) mm 1140 x 510 x 774 1440 x 510 x 774 840 x 510 x 774 External Dimension (WxDxH) mm 1205 x 745 x 1350 1505 x 745 x 1350 905 x 745 x 1350 Packed Dimension (WxDxH) mm 1280 x 820 x 1480 1580 x 820 x 1480 980 x 820 x 1480	Refrigerant		R290	R290	R290
Energy Class D D D Energy Consumption kWh/24h 13,89 16,35 11,83 Annual Energy Cons. kWh/year 5070 5968 4318 Input Power W 530 685 530 Voltage / Frequency V/Hz 220-240/50 220-240/50 220-240/50 Noise Level dB(A) 48 48 48 Internal Dimension (WxDxH) mm 1140 x 510 x 774 1440 x 510 x 774 840 x 510 x 774 External Dimension (WxDxH) mm 1205 x 745 x 1350 1505 x 745 x 1350 905 x 745 x 1350 Packed Dimension (WxDxH) mm 1280 x 820 x 1480 1580 x 820 x 1480 980 x 820 x 1480	Refrigerant Charge	g	130	140	110
Energy Consumption kWh/24h 13,89 16,35 11,83 Annual Energy Cons. kWh/year 5070 5968 4318 Input Power W 530 530 530 Voltage / Frequency V/Hz 220-240/50 220-240/50 220-240/50 220-240/50 Noise Level dB(A) 48 48 48 48 Internal Dimension (WxDxH) mm 1140 x 510 x 774 1440 x 510 x 774 840 x 510 x 774 External Dimension (WxDxH) mm 1205 x 745 x 1350 1505 x 745 x 1350 905 x 745 x 1350 Packed Dimension (WxDxH) mm 1280 x 820 x 1480 1580 x 820 x 1480 980 x 820 x 1480	Thermometer		Yes	Yes	Yes
Annual Energy Cons. kWh/year 5070 5968 4318 Input Power W 530 685 530 Voltage / Frequency V/Hz 220-240/50 220-240/50 220-240/50 Noise Level dB(A) 48 48 Internal Dimension (WxDxH) mm 1140 x 510 x 774 1440 x 510 x 774 840 x 510 x 774 External Dimension (WxDxH) mm 1205 x 745 x 1350 1505 x 745 x 1350 905 x 745 x 1350 Packed Dimension (WxDxH) mm 1280 x 820 x 1480 1580 x 820 x 1480 980 x 820 x 1480	Energy Class		D	D	D
Input Power W 530 685 530 Voltage / Frequency V/Hz 220-240/50 220-240/50 220-240/50 Noise Level dB(A) 48 48 48 Internal Dimension (WxDxH) mm 1140 x 510 x 774 1440 x 510 x 774 840 x 510 x 774 External Dimension (WxDxH) mm 1205 x 745 x 1350 1505 x 745 x 1350 905 x 745 x 1350 Packed Dimension (WxDxH) mm 1280 x 820 x 1480 1580 x 820 x 1480 980 x 820 x 1480	Energy Consumption	kWh/24h	13,89	16,35	11,83
Voltage / Frequency V/Hz 220-240/50 220-240/50 220-240/50 220-240/50 Noise Level dB(A) 48 48 48 Internal Dimension (WxDxH) mm 1140 x 510 x 774 840 x 510 x 774 840 x 510 x 774 External Dimension (WxDxH) mm 1205 x 745 x 1350 1505 x 745 x 1350 905 x 745 x 1350 Packed Dimension (WxDxH) mm 1280 x 820 x 1480 1580 x 820 x 1480 980 x 820 x 1480	Annual Energy Cons.	kWh/year	5070	5968	4318
Noise Level dB(A) 48 48 48 Internal Dimension (WxDxH) mm 1140 x 510 x 774 1440 x 510 x 774 840 x 510 x 774 External Dimension (WxDxH) mm 1205 x 745 x 1350 1505 x 745 x 1350 905 x 745 x 1350 Packed Dimension (WxDxH) mm 1280 x 820 x 1480 1580 x 820 x 1480 980 x 820 x 1480	Input Power	W	530	685	530
Internal Dimension (WxDxH) mm 1140 x 510 x 774 1440 x 510 x 774 840 x 510 x 774 External Dimension (WxDxH) mm 1205 x 745 x 1350 1505 x 745 x 1350 905 x 745 x 1350 Packed Dimension (WxDxH) mm 1280 x 820 x 1480 1580 x 820 x 1480 980 x 820 x 1480	Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
External Dimension (WxDxH) mm 1205 x 745 x 1350 1505 x 745 x 1350 905 x 745 x 1350 Packed Dimension (WxDxH) mm 1280 x 820 x 1480 1580 x 820 x 1480 980 x 820 x 1480	Noise Level	dB(A)	48	48	48
Packed Dimension (WxDxH) mm 1280 x 820 x 1480 1580 x 820 x 1480 980 x 820 x 1480	Internal Dimension (WxDxH)	mm	1140 x 510 x 774	1440 x 510 x 774	840 x 510 x 774
·	External Dimension (WxDxH)	mm	1205 x 745 x 1350	1505 x 745 x 1350	905 x 745 x 1350
40ft Container Load prs 23 15 28	Packed Dimension (WxDxH)	mm	1280 x 820 x 1480	1580 x 820 x 1480	980 x 820 x 1480
For Container Load pcs 25 15 20	40ft Container Load	pcs	23	15	28

Display Counters - Flat








Pastry display

Sliding doors


D A

LPD1500F/BLACK

Refrigerated Display Counter



- · LED light under each shelf
- Adjustable shelves (one step)
- Rear glass sliding doors
- Adjustable feet and castors
- Flat top/glass top
- · Double glazed glass
- · Anti mist front glass

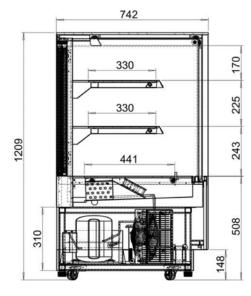

Description

The LPD-F range of refrigerated display counters has a flat double glazed glass front/top. It is a premium design made with high quality materials and comes in several sizes. It has great features such as frosted glass shelves with LED lighting underneath, an anti-mist front, and an efficient ventilated cooling system. Sliding doors provide easy access to the content.





LPD1200F/BLACK

Refrigerated Display Counter

• Stainless steel and gloss black glass frame

D A G

- LED light under each shelf
- Adjustable shelves (one step)
- Rear glass sliding doors
- Adjustable feet and castors
- Flat top/glass top
- Double glazed glass
- Anti mist front glass

LPD900F/BLACK

Refrigerated Display Counter



- Stainless steel and gloss black glass frame
- LED light under each shelf
- Adjustable shelves (one step)
- Rear glass sliding doors
- Adjustable feet and castors
- Flat top/glass top
- Double glazed glass
- Anti mist front glass

	0			
		LPD1200F/BLACK	LPD1500F/BLACK	LPD900F/BLACK
Door No & Type		2 sliding glass doors	2 sliding glass doors	2 sliding glass doors
Shelves No & Type		2 glass shelves + base	2 glass shelves + base	2 glass shelves + base
Shelf Dimensions		105x33 / 105x33 / 105x44	135x33 / 135x33 / 135x44	75x33 / 75x33 / 75x44
Total Display Area	m²	1,85	2,26	1,44
Temperature Range	°C	+2 to +8	+2 to +8	+2 to +8
Climate Class		3	3	3
Gross / Net Weight	kg	273 / 232	310 / 262	273 / 232
Gross / Net Volume	I	377 / 191	480 / 244	275 / 140
Feet / Legs		4 adjustable feet	4 adjustable feet	4 adjustable feet
Castors		4 castors	4 castors	4 castors
Exterior Finish		Stainless steel / Glass	Stainless steel / Glass	Stainless steel / Glass
Interior Finish		Stainless steel / Glass	Stainless steel / Glass	Stainless steel / Glass
Interior Light		LED	LED	LED
Type of Controller		Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic
Refrigerant		R290	R290	R290
Refrigerant Charge	g	130	140	110
Thermometer		Yes	Yes	Yes
Energy Class		D	D	D
Energy Consumption	kWh/24h	11,13	12,94	9,59
Annual Energy Cons.	kWh/year	4062	4723	3500
Input Power	W	580	685	480
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	48	48	48
Internal Dimension (WxDxH)	mm	1140 x 510 x 670	1440 x 510 x 670	840 x 510 x 670
External Dimension (WxDxH)	mm	1205 x 745 x 1209	1505 x 745 x 1209	905 x 745 x 1209
Packed Dimension (WxDxH)	mm	1260 x 800 x 1320	1560 x 800 x 1320	960 x 800 x 1320
40ft Container Load	pcs	46	30	56

Display Counters - Curved







Pastry display


Sliding doors

LPD1500C/BLACK

Refrigerated Display Counter



- · LED light under each shelf
- Adjustable shelves (one step)
- Rear glass sliding doors
- · Adjustable feet and castors
- Curved top/glass top/front
- · Double glazed glass
- · Anti mist front glass

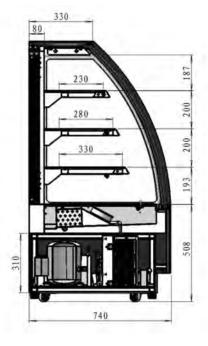

Description

The LPD-C range of refrigerated display counters has a curved double glazed glass front. It is a premium design made with high quality materials and comes in several sizes. It has great features such as frosted glass shelves with LED lighting underneath, an anti-mist front, and an efficient ventilated cooling system. Sliding doors provide easy access to the content.




D A G



LPD1200C/BLACK

Refrigerated Display Counter



- LED light under each shelf
- Adjustable shelves (one step)
- Rear glass sliding doors
- Adjustable feet and castors
- Curved top/glass top/front
- Double glazed glass
- Anti mist front glass

LPD900C/BLACK

Refrigerated Display Counter



- Stainless steel and gloss black glass frame
- LED light under each shelf
- Adjustable shelves (one step)
- Rear glass sliding doors
- Adjustable feet and castors
- Curved top/glass top/front
- Double glazed glass
- Anti mist front glass

		LPD1200C/BLACK	LPD1500C/BLACK	LPD900C/BLACK
Door No & Type		2 sliding glass doors	2 sliding glass doors	2 sliding glass doors
Shelves No & Type		3 glass shelves + base	3 glass shelves + base	3 glass shelves + base
Shelf Dimensions		105x23 / 105x28 / 105x33 / 105x44	135x23 / 135x28 / 135x33 / 135x44	75x33 / 75x33 / 75x44
Total Display Area	m²	2,01	2,47	1,54
Temperature Range	°C	+2 to +8	+2 to +8	+2 to +8
Climate Class		3	3	3
Gross / Net Weight	kg	309 / 269	315 / 275	235 / 204
Gross / Net Volume	I	328 / 218	418 / 277	238 / 158
Feet / Legs		4 adjustable feet	4 adjustable feet	4 adjustable feet
Castors		4 castors	4 castors	4 castors
Exterior Finish		Stainless steel / Glass	Stainless steel / Glass	Stainless steel / Glass
Interior Finish		Stainless steel / Glass	Stainless steel / Glass	Stainless steel / Glass
Interior Light		LED	LED	LED
Type of Controller		Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic
Refrigerant		R290	R290	R290
Refrigerant Charge	g	130	140	110
Thermometer		Yes	Yes	Yes
Energy Class		D	D	D
Energy Consumption	kWh/24h	12,58	13,53	10,97
Annual Energy Cons.	kWh/year	4592	4938	4004
Input Power	W	580	798	598
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	48	48	48
Internal Dimension (WxDxH)	mm	1050 x 580 x 780	1350 x 580 x 780	750 x 580 x 780
External Dimension (WxDxH)	mm	1205 x 745 x 1360	1505 x 745 x 1360	905 x 745 x 1360
Packed Dimension (WxDxH)	mm	1260 x 800 x 1480	1560 x 800 x 1480	960 x 800 x 1480
40ft Container Load	pcs	23	15	28

Display Counters - Tabletop

DID YOU KNOW?

We offer refrigerated display counters with curved or flat glass front.

Available as floor or tabletop models.



LCT900C/BLACK

Refrigerated Display Case Countertop

- Stainless steel
- Double glazed glass
- Rear glass sliding doors
- · Adjustable feet
- Curved top/glass top/front
- LED interior light
- Ventilated cooling







Pastry display

Sliding doors

Description

The LCT-C range of refrigerated display cases is a countertop model with a curved glass front. It comes in two sizes and has a contemporary design with a stainless steel finish. The glass display case has LED lighting and fixed wire shelves for great product presentation. Easy access is provided by rear sliding doors.



LCT900F/BLACK

Refrigerated Display Counter

- Stainless steel
- Double glazed glass
- Rear glass sliding doors
- Adjustable feet
- Flat top/glass top
- LED interior light
- Ventilated cooling



LCT750C/BLACK

Refrigerated Display Counter



- Stainless steel
- Double glazed glass
- Rear glass sliding doors
- Adjustable feet
- Curved top/glass top/front
- LED interior light
- Ventilated cooling

		LCT750C/BLACK	LCT750F/BLACK	LCT900C/BLACK	LCT900F/BLACK
Door No & Type		2 sliding glass doors	2 sliding glass doors	2 sliding glass doors	2 sliding glass doors
Shelves No & Type		2 wire shelves chrome + base	2 wire shelves chrome + base	2 wire shelves chrome	2 wire shelves chrome + base
Total Display Area	m²	0,7	0,72	0,8	0,9
Temperature Range	°C	+2 to +8	+2 to +8	+2 to +8	+2 to +8
Climate Class		3	3	3	3
Gross / Net Weight	kg	87 / 63	89 / 65	94 / 70	99 / 75
Gross / Net Volume	I	100 / 60	120 / 67	130 / 78	160 / 88
Feet / Legs		4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Exterior Finish		Stainless steel / Glass	Stainless steel / Glass	Stainless steel / Glass	Stainless steel / Glass
Interior Finish		Stainless steel / Glass	Stainless steel / Glass	Stainless steel / Glass	Stainless steel / Glass
Interior Light		LED	LED	LED	LED
Type of Controller		Electronic	Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic	Automatic
Refrigerant		R290	R290	R290	R290
Refrigerant Charge	g	45	45	45	45
Thermometer		Yes	Yes	Yes	Yes
Energy Class		С	С	С	С
Energy Consumption	kWh/24h	4,13	4,39	4,32	4,61
Annual Energy Cons.	kWh/year	1507	1603	1577	1684
Input Power	W	242	242	242	242
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	48	48	48	48
Internal Dimension (WxDxH)	mm	640 x 450 x 400	640 x 450 x 400	840 x 450 x 400	840 x 450 x 400
External Dimension (WxDxH)	mm	700 x 560 x 670	700 x 560 x 670	900 x 560 x 670	900 x 560 x 670
Packed Dimension (WxDxH)	mm	784 x 641 x 790	784 x 641 x 790	984 x 641 x 790	984 x 641 x 790
40ft Container Load	pcs	153	153	126	126

Display Cases - Tabletop





Adjustable shelves



Electronic thermostat

UPD80-BLACK

Refrigerated Display Case Countertop

- Double glazed glass on four sides
- Adjustable wire shelves
- · Glass door
- Black finish
- Adjustable feet
- Ventilated cooling
- Internal LED light



Description

The UPD range of refrigerated display cases has a vertical design with double glazed glass on all four sides. It comes with adjustable wire shelves for flexibility. LED lighting illuminates the content, while a ventilated cooling system keeps it cool and fresh. The UPD range comes in several sizes and finishes to meet any need.

UPD80-GREY

Refrigerated Display Case Countertop

- Double glazed glass on four sides
- Adjustable wire shelves
- Glass door
- Grey finish

- Adjustable feet
- Ventilated cooling
- Internal LED light





UPD60-BLACK

Refrigerated Display Case Countertop

- Double glazed glass on four sides
- Adjustable wire shelves
- Glass door
- Black finish
- Adjustable feet
- Ventilated cooling
- Internal LED light



		UPD60-BLACK	UPD60-GREY	UPD80-BLACK	UPD80-GREY
Door No & Type		1 hinged glass door	1 hinged glass door	1 hinged glass door	1 hinged glass doo
Shelves No & Type		2 wire shelves black	2 wire shelves grey	3 wire shelves black	3 wire shelves grey
Shelf Color		Black	Grey	Black	Grey
Total Display Area	m²	0,57	0,57	0,76	0,76
Temperature Range	°C	+2 to +12	+2 to +12	+2 to +12	+2 to +12
Climate Class		4	4	4	4
Gross / Net Weight	kg	42 / 38	42 / 38	46 / 41	46 / 41
Gross / Net Volume	I	60 / 58	60 / 58	80 / 78	80 / 78
Feet / Legs		4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Exterior Finish		Black finish, ABS	Grey finish, ABS	Black finish, ABS	Grey finish, ABS
nterior Finish		Black finish, ABS	Grey finish, ABS	Black finish, ABS	Grey finish, ABS
nterior Light		LED	LED	LED	LED
Type of Controller		Electronic	Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic	Automatic
Refrigerant		R600a	R600a	R600a	R600a
Refrigerant Charge	g	38	38	40	40
Thermometer		Yes	Yes	Yes	Yes
Energy Class		С	С	С	С
Energy Consumption	kWh/24h	3,59	3,59	3,75	3,75
Annual Energy Cons.	kWh/year	1311	1311	1369	1369
nput Power	W	164	164	184	184
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	42	42	42	42
nternal Dimension (WxDxH)	mm	400 x 358 x 460	400 x 358 x 460	400 x 358 x 610	400 x 358 x 610
External Dimension (WxDxH)	mm	428 x 386 x 855	428 x 386 x 855	428 x 386 x 1000	428 x 386 x 1000
Packed Dimension (WxDxH)	mm	500 x 450 x 895	500 x 450 x 895	500 x 450 x 1045	500 x 450 x 1045
40ft Container Load	pcs	230	230	230	230

Display Coolers Display Cases






Frameless door



Wine shelves as option

UPD400-C

Refrigerated Display Case (Cooling)




- Frameless glass door
- Great product presentation
- Internal LED light
- Black steel exterior
- Mirror effect stainless steel interior
- Adjustable glass shelves
- Ventilated cooling
- Wine shelves available as option

Description

The UPD400-C glass display case offers an elegant solution for displaying cakes and desserts. The cooler has double glazed glass on all sides, including a frameless glass door. It has a modern design with a black steel exterior, a stainless steel interior, 5 adjustable glass shelves, and LED lighting.









UPD200

Refrigerated Display Case

- Double glazed glass on four
- Adjustable wire shelves
- Glass door
- Aluminium finish
- Strong wheels for mobilityVentilated cooling
- Internal LED light





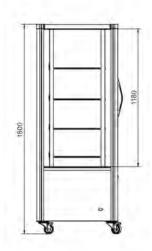

		UPD200	UPD400-C
Door No & Type		1 hinged glass door	1 hinged glass door
Shelves No & Type		5 wire shelves white	5 glass shelves + base
Shelf Color		White	
Total Display Area	m²	2,29	1,95
Temperature Range	°C	+2 to +12	+2 to +8
Climate Class		4	4
Gross / Net Weight	kg	160 / 140	225 / 203
Gross / Net Volume	I	468 / 425	364 / 248
Castors		4 wheels, 2 with brake	4 wheels, 2 with brake
Exterior Finish		Aluminium / SS304	Black / Glass
Interior Finish		Aluminium / SS304	Stainless steel / Glass
Interior Light		LED	4 x Vertically LED
Lock			Yes
Type of Controller		Electronic	Electronic
Type of Cooling		Ventilated	Ventilated
Type of Defrost		Automatic	Automatic
Refrigerant		R290	R290
Refrigerant Charge	g	130	95
Thermometer		Yes	Yes
Energy Class		В	C
Energy Consumption	kWh/24h	4,99	6,55
Annual Energy Cons.	kWh/year	1822	2391
Input Power	W	255	320
Voltage / Frequency	V/Hz	220-240/50	220-240/50
Noise Level	dB(A)	46	42
Internal Dimension (WxDxH)	mm	638 x 638 x 1180	588 x 516 x 1200
External Dimension (WxDxH)	mm	706 x 706 x 1800	650 x 650 x 1950
Packed Dimension (WxDxH)	mm	760 x 820 x 1930	720 x 720 x 2030
40ft Container Load	pcs	42	48

SOCA Serve Over Counters



New Produc



Suitable for Dairy Products



DID YOU KNOW?

The SOC serve over counters have a spacious storage compartment that fits E2 boxes for easy refill.




SOCA37590A

Serve Over Counter

- Excellent product visibility
- 900 mm deep stainless steel deck
- · Anti mist front glass
- Glass front lifts up for easy cleaning
- · Stainless steel rear shelf
- Ventilated cooling
- Temperature Class 3M1
- LED top light
- Stainless steel bumper bars
- 2 x 220V sockets to rear
- Multiplexing kit as accessory









Digital controller

Description

The SOCA range of serve over counters blend style with functionality, ideal for butchers and delis. Features include anti-mist glass, LED lighting, and a 900mm deep deck for an attractive display and space. The deck stays cool with a ventilated cooling system and airholes. It's easy to clean and has ample storage. Customize with accessories and multiplex for a full counter solution.



SOCA12590A

Serve Over Counter

- Excellent product visibility
- 900 mm deep stainless steel deck
- Anti mist front glass
- Glass front lifts up for easy cleaning
- Stainless steel rear shelf
- Ventilated cooling
- Temperature Class 3M1
- LED top light
- Stainless steel bumper bars
- 2 x 220V sockets to rear
- Multiplexing kit as accessory




SOCA18790A

Serve Over Counter



- Excellent product visibility
- 900 mm deep stainless steel deck
- Anti mist front glass
- Glass front lifts up for easy cleaning
- Stainless steel rear shelf
- Ventilated cooling
- Temperature Class 3M1
- LED top light
- Stainless steel bumper bars
- 2 x 220V sockets to rear
- Multiplexing kit as accessory

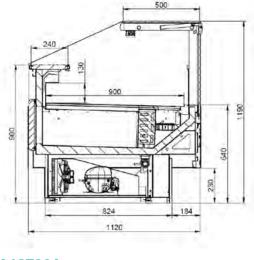

· Multiplexing kit as accessory		, o , y	y Multiplexing kit as accessory				
		SOCA12590A	SOCA18790A	SOCA25090A	SOCA37590A		
Door No & Type							
Shelves No & Type							
Total Display Area	m²	1,27	1,77	2,29	3,31		
Temperature Range	°C	0 to +4	0 to +4	0 to +4	0 to +4		
Climate Class		3	3	3	3		
Gross / Net Weight	kg	260 / 220	310 / 250	410 / 325	565 / 470		
Gross / Net Volume	I	325	489	654	982		
Feet / Legs		Adjustable feet	Adjustable feet	Adjustable feet	Adjustable feet		
Exterior Finish		Grey RAL7015	Grey RAL7015	Grey RAL7015	Grey RAL7015		
Interior Finish		Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel		
Interior Light		LED	LED	LED	LED		
Lock		No	No	No	No		
Type of Controller		Electronic	Electronic	Electronic	Electronic		
Type of Cooling		Ventilated	Ventilated	Ventilated	Ventilated		
Type of Defrost		Automatic, electric	Automatic, electric	Automatic, electric	Automatic, electric		
Refrigerant		R290	R290	R290	R290		
Refrigerant Charge	g	150	150	2 x 150	2 x 150		
Thermometer		Yes	Yes	Yes	Yes		
Energy Class		E	E	F	F		
Energy Consumption	kWh/24h	6	7,5	10	14,4		
Annual Energy Cons.	kWh/year	2190	2738	3650	5256		
Power Supply		13 Amp	13 Amp	13 Amp	13 Amp		
Input Power	W	320	480	690	1000		
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50		
Noise Level	dB(A)	59	59	59	59		
Internal Dimension (WxDxH)	mm	1250 x 900 x 545	1875 x 900 x 545	2500 x 900 x 545	3750 x 900 x 545		
External Dimension (WxDxH)	mm	1298 x 1120 x 1190	1923 x 1120 x 1190	2548 x 1120 x 1190	3798 x 1120 x 1190		
Packed Dimension (WxDxH)	mm	1500 x 1250 x 1400	2100 x 1250 x 1400	2750 x 1250 x 1400	4000 x 1250 x 1400		
40ft Container Load	pcs	8	9	4	3		



SOCB Serve Over Counters



New Produc



Suitable for Dairy Products



Suitable for Fresh Meat



SOCB37582A

Serve Over Counter

- Excellent product visibility
- 825 mm deep stainless steel deck
- Anti mist front glass
- · Glass front opens forward for easy cleaning
- Stainless steel rear shelf
- Ventilated cooling
- Temperature Class 3M1
- · LED top light
- 2 x 220V sockets to rear
- Multiplexing kit as accessory
- Bumper bars









60x40 cm boxes fit perfectly

Description

The SOCB range of serve over counters are ideal for delis displaying meats and cheeses with flair. These units have an 825mm deep stainless steel deck, LED lighting, easy rear access, and a front glass that opens forward for simple cleaning. They fit E2 vegetable boxes, can be multiplexed, and offer customizable options such as additional shelves, knife blocks, and more.



1120

SOCB12582A

Serve Over Counter


- Excellent product visibility
- 825 mm deep stainless steel deck
- Anti mist front glass
- Glass front opens forward for easy cleaning
- Stainless steel rear shelf
- Ventilated cooling
- Temperature Class 3M1
- LED top light
- 2 x 220V sockets to rear
- Multiplexing kit as accessory

SOCB18782A

Serve Over Counter

- Excellent product visibility
- 825 mm deep stainless steel deck
- Anti mist front glass
- Glass front opens forward for easy cleaning
- Stainless steel rear shelf
- Ventilated cooling
- Temperature Class 3M1
- LED top light
- 2 x 220V sockets to rear
- Multiplexing kit as accessory

 Bumper bars 	s • Bumper bars				
		SOCB12582A	SOCB18782A	SOCB25082A	SOCB37582A
Door No & Type					
Shelves No & Type					
Total Display Area	m²	1,27	1,77	2,29	3,31
Temperature Range	°C	0 to +4	0 to +4	0 to +4	0 to +4
Climate Class		3	3	3	3
Gross / Net Weight	kg	260 / 220	310 / 250	410 / 325	565 / 470
Gross / Net Volume	1	311	469	627	947
Feet / Legs		Adjustable feet	Adjustable feet	Adjustable feet	Adjustable feet
Exterior Finish		Grey RAL7015	Grey RAL7015	Grey RAL7015	Grey RAL7015
Interior Finish		Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Interior Light		LED	LED	LED	LED
Lock		No	No	No	No
Type of Controller		Electronic	Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic, electric	Automatic, electric	Automatic, electric	Automatic, electric
Refrigerant		R290	R290	R290	R290
Refrigerant Charge	g	150	150	2 x 150	2 x 150
Thermometer		Yes	Yes	Yes	Yes
Energy Class		E	E	F	F
Energy Consumption	kWh/24h	5,45	7,05	10,2	13,4
Annual Energy Cons.	kWh/year	1989	2573	3723	4891
Power Supply		13 Amp	13 Amp	13 Amp	13 Amp
Input Power	W	426	660	860	1382
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	59	59	59	59
Internal Dimension (WxDxH)	mm	1250 x 825 x 545	1875 x 825 x 545	2500 x 825 x 545	3750 x 825 x 545
External Dimension (WxDxH)	mm	1298 x 1120 x 1190	1923 x 1120 x 1190	2548 x 1120 x 1190	3798 x 1120 x 1190
Packed Dimension (WxDxH)	mm	1500 x 1250 x 1400	2100 x 1250 x 1400	2750 x 1250 x 1400	4000 x 1250 x 1400
40ft Container Load	pcs	8	9	4	3

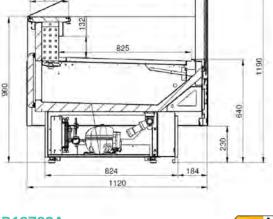

SPID Serve Over Counters



New Product



Suitable for Dairy Products



Fresh Meat



SPID250


Serve Over Counter

- Excellent product visibility
- Glass structure for protection of food
- Front glass hinges forward if required
- Accepts GN1/1 pan(s) (not supplied)
- Easy access storage compartment
- Black exterior
- Ventilated cooling
- Automatic defrost
- LED interior light





Designed for GN1/1 pans, not supplied



Thermometer

Description

The SPID range of serve over counters is ideal for showcasing fresh food appealingly in sandwich shops, delis, and supermarkets. The glass front protects the food while providing a great view for customers. The counter has ventilated cooling and is suitable for gastronorm pans (not included). Available in several sizes to suit your requirements.



SPID100

Serve Over Counter

- Excellent product visibility
- Glass structure for protection of food
- Front glass hinges forward if required
- Accepts GN1/1 pan(s) (not supplied)
- Easy access storage compartment
- Black exterior
- Ventilated cooling
- Automatic defrost
- LED interior light



SPID130

Serve Over Counter

- Excellent product visibility
- Glass structure for protection of food
- Front glass hinges forward if required
- Accepts GN1/1 pan(s) (not supplied)
- Easy access storage compartment
- Black exterior
- Ventilated cooling
- Automatic defrost
- LED interior light





		SPID100	SPID130	SPID150	SPID200	SPID250
Door No & Type		1 hinged solid door	2 hinged solid door	2 hinged solid door	3 hinged solid door	4 hinged solid door
Shelves No & Type						
Total Display Area	m²	0,76	0,95	1,14	1,52	1,9
Temperature Range	°C	-1 to +5				
Climate Class		3	3	3	3	3
Gross / Net Weight	kg	180 / 164	206 / 171	219 / 184	275 / 230	297 / 277
Gross / Net Volume	I					
Feet / Legs		4 adjustable feet	4 adjustable feet	4 adjustable feet	6 adjustable feet	6 adjustable feet
Exterior Finish		Black RAL9005				
Interior Finish		White RAL9003				
Interior Light		Yes	Yes	Yes	Yes	Yes
Lock		No	No	No	No	No
Type of Controller		Electronic	Electronic	Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic	Automatic	Automatic
Refrigerant		R290	R290	R290	R290	R290
Refrigerant Charge	g	80	100	120	120	150
Thermometer		Yes	Yes	Yes	Yes	Yes
Energy Consumption	kWh/24h	5,7	6,6	8,8	12,6	13,7
Annual Energy Cons.	kWh/year	2081	2409	3212	4599	5001
Input Power	W	565	572	781	1098	1284
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	48	52	54	54	56
Internal Dimension (WxDxH)	mm	960 x 670 x	1220 x 670 x	1440 x 670 x	1940 x 670 x	2396 x 670 x
External Dimension (WxDxH)	mm	1025 x 960 x 1235	1265 x 960 x 1235	1505 x 960 x 1235	1985 x 960 x 1235	2465 x 960 x 1235
Packed Dimension (WxDxH)	mm	1155 x 1065 x 1230	1405 x 1065 x 1230	1525 x 1065 x 1230	2125 x 1065 x 1230	2625 x 1065 x 1230
40ft Container Load	pcs	44	32	28	22	16

Stainless Steel Open Front Coolers



Suitable for Dairy Products



Suitable for Fresh Meat



Lock



Site Survey



Special Installation





Security shutter with lock



Strong castors

MCX130M

Stainless Steel Multideck

- Ideal for impulse sales
- Lockable security shutter
- Ventilated cooling
- · Adjustable shelves
- Fully automatic
- Castors with brake
- Digital controller and temperature display
- Ticket strip included



Description

The MCX range of stainless steel multidecks is ideal for enhancing impulse purchases. It is available in several sizes, with a manual security shutter with lock. It caters to the need for refrigerated display during service while also prioritizing product security during non-service periods.




MCX90M

Stainless Steel Multideck



- Lockable security shutter
- Ventilated cooling
- · Adjustable shelves
- Fully automatic
- · Castors with brake
- Digital controller and temperature display
- Ticket strip included

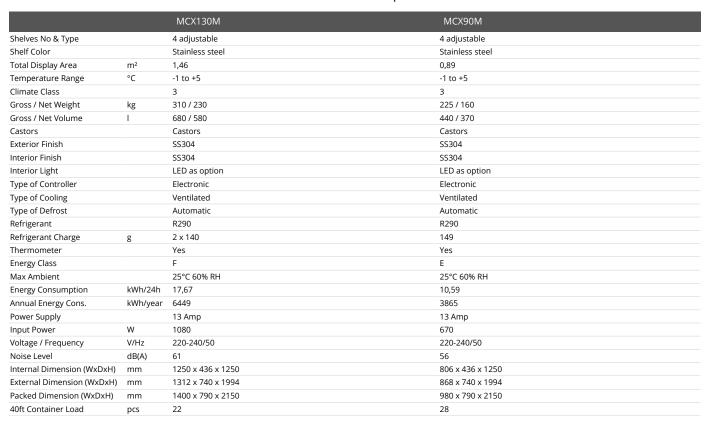



Extra Multideck Coolers



Freezer Option Available








DID YOU KNOW?

The EXTRA range boasts a deep bottom shelf, ideal for vegetable crates.

EXTRA1250CD

Supermarket Multideck Cooler



- Temperature Class 3M1
- Heavy duty shelving with strengthening bar
- · Adjustable extra deep shelves to maximise capacity
- Tilting function for better product display
- Internal vertical LED light
- Base plus 4 shelves
- · Glass end walls as standard
- Multiplexing kit as accessory



Glass end walls as standard



60x40 cm boxes fit perfectly

Description

The EXTRA range of multideck coolers with doors and extra deep shelves is perfect for grocery shops and supermarkets. It comes in different sizes and offers great product presentation with glass doors, glass end walls, and adjustable shelves with tilting function. The EXTRA models can be multiplexed with a union kit to create uninterrupted continued shopping lines throughout the store. Despite the spaciousness of the cabinet, it has a low energy consumption.



EXTRA1875CD

Supermarket Multideck Cooler



- Can be multiplexed Create uninterrupted continuous line
- Temperature Class 3M1
- Heavy duty shelving with strengthening bar
- Adjustable extra deep shelves to maximise capacity
- Tilting function for better product display
- Internal vertical LED light
- Base plus 4 shelves
- Glass end walls as standard
- Multiplexing kit as accessory

EXTRA2500CD



Supermarket Multideck Cooler

- Can be multiplexed Create uninterrupted continuous line
- Temperature Class 3M1
- Heavy duty shelving with strengthening bar
- Adjustable extra deep shelves to maximise capacity
- Tilting function for better product display
- Internal vertical LED light
- Base plus 4 shelves
- Glass end walls as standard
- Multiplexing kit as accessory

		EXTRA1250CD	EXTRA1875CD	EXTRA2500CD
Total Display Area	ma ?	***		
Total Display Area	m²	1,81	2,72	3,63
Door No & Type Door Reversible		2 hinged glass doors	3 hinged glass doors	4 hinged glass doors No
		No	No	
Shelves No & Type		4 black sheet, tilting + base	4 black sheet, tilting + base	4 black sheet, tilting + base
Shelf Color		Black	Black	Black
Max load on Shelves	kg/m²	100	100	100
Temperature Range	°C	+2 to +6	+2 to +6	+2 to +6
Climate Class		3	3	3
Gross / Net Weight	kg	340 / 320	475 / 425	700 / 640
Gross / Net Volume	I	880 / 770	1350 / 1160	1785 / 1540
Feet / Legs		4 adjustable feet	6 adjustable feet	6 adjustable feet
Castors		Option	Option	Option
Exterior Finish		Black / Glass	Black / Glass	Black / Glass
Interior Finish		Black	Black	Black
Interior Light		2 x Vertically LED	2 x Vertically LED	2 x Vertically LED
Lock		No	No	No
Type of Controller		Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic, hot gas	Automatic, hot gas	Automatic, hot gas
Refrigerant		R290	R290	R290
Refrigerant Charge	g	144	2x144	2x144
Thermometer		Yes	Yes	Yes
Energy Class		D	С	С
Energy Consumption	kWh/24h	11	14,03	15,75
Annual Energy Cons.	kWh/year	4015	5119	5748
Input Power	W	1100	1300	2200
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	53	53	53
Internal Dimension (WxDxH)	mm	1250 x 610 x 1399	1875 x 610 x 1399	2500 x 610 x 1399
External Dimension (WxDxH)	mm	1350 x 920 x 2035	1975 x 920 x 2035	2600 x 920 x 2035
Packed Dimension (WxDxH)	mm	1450 x 975 x 2230	2075 x 975 x 2230	2700 x 975 x 2230
40ft Container Load	pcs	16	12	8

MULTIDECKS I 110

Galaxy+ Multideck Coolers



Freezer Option Available



Suitable for Dairy Products



Suitable for Fresh Meat



Site Surve




Special Installation



Galaxy+ GP26FGD Black

Supermarket Multideck Cooler



- Can be multiplexed Create uninterrupted continuous line
- Frameless glass doors for great product visibility
- Adjustable shelves with tilting function
- Heavy duty shelving with strengthening bar
- Ticket strip and acrylic front riser as standard
- · Self-closing doors
- Stainless steel bumper bars
- · Ventilated cooling
- Multiplexing kit as accessory
- Solid 40 mm endwalls with mirrored interior









Frameless glass doors

Description

The Galaxy+ range of multideck coolers offers a highly energy efficient cooling system combined with a gorgeous design. The full height glass doors allow for great product visibility. It is a spacious cabinet complete with adjustable shelves and internal LED lighting for optimum product presentation.





Galaxy+ GP14FGD Black

Supermarket Multideck Cooler



- EU Energy Class B
- Can be multiplexed Create uninterrupted continuous line
- Frameless glass doors for great product visibility
- Adjustable shelves with tilting function
- Heavy duty shelving with strengthening bar
- Ticket strip and acrylic front riser as standard
- Self-closing doors
- Solid 40 mm endwalls with mirrored interior
- Internal vertical and horizontal LED light
- Stainless steel bumper bars
- Multiplexing kit as accessory

Galaxy+ GP10FGD Black



Supermarket Multideck Cooler

- EU Energy Class B
- Can be multiplexed Create uninterrupted continuous line
- Frameless glass doors for great product visibility
- Adjustable shelves with tilting function
- Heavy duty shelving with strengthening bar
- Ticket strip and acrylic front riser as standard
- Self-closing doors
- Solid 40 mm endwalls with mirrored interior
- Internal vertical and horizontal LED light
- Stainless steel bumper bars
- · Multiplexing kit as accessory

		Galaxy+ GP10FGD Black	Galaxy+ GP14FGD Black	Galaxy+ GP20FGD Black	Galaxy+ GP26FGD Black
Total Display Area	m²	1,44	1,91	2,87	3,83
Door No & Type		2 hinged glass doors	2 hinged glass doors	4 hinged glass doors	4 hinged glass doors
Door Reversible		No	No	No	No
Shelves No & Type		5 adjustable	5 adjustable	5 adjustable	5 adjustable
Shelf Color		Black	Black	Black	Black
Shelf Dimensions		938x400mm	1250x400mm	938x400mm	1250x400mm
Max load on Shelves	kg/m²	160	160	160	160
Temperature Range	°C	-1 to +5	-1 to +5	-1 to +5	-1 to +5
Climate Class		3	3	3	3
Gross / Net Weight	kg	277 / 264	369 / 285	470 / 439	490 / 459
Gross / Net Volume	I	1083 / 472	1443 / 629	2165 / 943	2887 / 1258
Feet / Legs		4 adjustable feet	4 adjustable feet	6 adjustable feet	6 adjustable feet
Exterior Finish		Black RAL9005	Black RAL9005	Black RAL9005	Black RAL9005
Interior Finish		Black RAL9005	Black RAL9005	Black RAL9005	Black RAL9005
Interior Light		LED	LED	LED	LED
Lock		No	No	No	No
Type of Controller		Electronic	Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic	Automatic
Refrigerant		R290	R290	R290	R290
Refrigerant Charge	g	110	140	150	2x150
Thermometer		Yes	Yes	Yes	Yes
Energy Class		В	В	В	В
Max Ambient		25°C at 60% RH			
Energy Consumption	kWh/24h	3,25	3,66	5,47	7,73
Annual Energy Cons.	kWh/year	1186	1336	1997	2821
Power Supply		13 Amp	13 Amp	13 Amp	16 Amp
Input Power	W	580	583	829	868
/oltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	55	55	55	55
nternal Dimension (WxDxH)	mm	938 x 544 x 1562	1250 x 544 x 1562	1875 x 544 x 1562	2500 x 544 x 1562
External Dimension (WxDxH)	mm	1018 x 740 x 2040	1330 x 740 x 2040	1955 x 740 x 2040	2580 x 740 x 2040
Packed Dimension (WxDxH)	mm	1100 x 770 x 2320	1350 x 770 x 2320	2000 x 770 x 2320	2650 x 770 x 2320
40ft Container Load	pcs	30	23	12	8

MULTIDECKS I 112

DISPLAY COOLERS PC Multideck Coolers



Suitable for Dairy Products





PC2500B

Supermarket Multideck Cooler

- Frameless glass doors for great product visibility
- · Low energy consumption
- · Black interior and exterior
- Adjustable shelves with tilting function
- LED light under each shelf
- Ventilated cooling for fast pull-down and even temperature
- Digital controller and temperature display
- · Glass end walls as standard
- 33 mm ticket strips with shelf risers included
- · Castors and locking feet



Display with a button for each feature



LED light under each shelf

Description

The PC range of multideck coolers offers a spacious cooling solution with a low energy consumption. It comes with 2-, 3- or 4 frameless glass doors as well as glass end walls for optimal product visibility. It has LED lights at the top of the unit and below each of the deep shelves. A great choice for supermarkets and convenience stores.



PC1250B

Supermarket Multideck Cooler



- Frameless glass doors for great product visibility
- Low energy consumption
- Black interior and exterior
- Adjustable shelves with tilting function
- LED light under each shelf
- Ventilated cooling for fast pull-down and even temperature
- Digital controller and temperature display
- Glass end walls as standard
- Castors and locking feet
- 33 mm ticket strips with shelf risers included

PC1870B

B

Supermarket Multideck Cooler

- Frameless glass doors for great product visibility
- Low energy consumption
- Black interior and exterior
- Adjustable shelves with tilting function
- LED light under each shelf
- Ventilated cooling for fast pull-down and even temperature
- Digital controller and temperature display
- Glass end walls as standard
- 33 mm ticket strips with shelf risers included
- Castors and locking feet

		PC1250B	PC1870B	PC2500B
Total Display Area	m²	3,14	4,13	5,13
Door No & Type		2 hinged glass doors	3 hinged glass doors	4 hinged glass doors
Shelves No & Type		5 adjustable	5 adjustable	5 adjustable
Shelf Color		Black	Black	Black
Max load on Shelves	kg/m²	160	160	160
Temperature Range	°C	-1 to +5	-1 to +5	-1 to +5
Climate Class		3	3	3
Gross / Net Weight	kg	300 / 260	420 / 370	500 / 440
Gross / Net Volume	I	1292 / 764	1939 / 1147	2585 / 1529
Feet / Legs		4 adjustable feet	6 adjustable feet	6 adjustable feet
Castors		4 castors	6 castors	6 castors
Exterior Finish		Black RAL9005	Black RAL9005	Black RAL9005
nterior Finish		Black RAL9005	Black RAL9005	Black RAL9005
nterior Light		LED	LED	LED
Type of Controller		Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic
Refrigerant		R290	R290	R290
Refrigerant Charge	g	149	2 x 139	2 x 149
Thermometer		Yes	Yes	Yes
Energy Class		В	В	В
Energy Consumption	kWh/24h	5,87	8,13	10,2
Annual Energy Cons.	kWh/year	2143	2967	3723
Input Power	W	550	980	1060
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	62	65	65
nternal Dimension (WxDxH)	mm	1250 x 450 x 1540	1875 x 450 x 1540	2500 x 450 x 1540
External Dimension (WxDxH)	mm	1310 x 740 x 2050	1935 x 740 x 2050	2560 x 740 x 2050
Packed Dimension (WxDxH)	mm	1340 x 770 x 2120	1965 x 770 x 2120	2590 x 770 x 2120
40ft Container Load	pcs	25	17	12

MULTIDECKS I 114

ODC Open Display Coolers





Soft release night blind / curtain



Adjustable shelves with tilting function

ODC90 BLACK

Low open front

- Ideal for impulse sales at the cash desk
- Ventilated cooling
- Night blind / Curtain with soft release
- Adjustable shelves with tilting function
- LED interior light
- Black exterior



Description


The ODC range of low open display coolers is perfect for stimulating impulse purchases. It is available in two sizes with a black or white interior. Exterior is black for all. All models are equipped with an effective ventilated cooling system to ensure an even and stable temperature throughout the unit. Complete with LED lighting and adjustable shelves with a tilting function to provide the best possible product presentation.





ODC60 BLACK

Low open front



- Ventilated cooling
- Night blind / Curtain with soft release
- Adjustable shelves with tilting function
- LED interior light
- Black exterior

ODC60

Low open front



- Ideal for impulse sales at the cash desk
- Ventilated cooling
- Night blind / Curtain with soft release
- Adjustable shelves with tilting function
- LED interior light
- Black exterior

		ODC60	ODC60 BLACK	ODC90	ODC90 BLACK
Shelves No & Type		2 tilting	2 tilting	2 tilting	2 tilting
Shelf Dimensions		515 * 286 / 336	515 * 286 / 336	790 * 286 / 336	790 * 286 / 336
Total Display Area	m²	0,44	0,44	0,59	0,59
Temperature Range	°C	+5 to +8	+5 to +8	+5 to +8	+5 to +8
Climate Class		3	3	3	3
Gross / Net Weight	kg	110 / 98	110 / 98	182 / 164	182 / 164
Gross / Net Volume	1	192 / 161	192 / 161	289 / 242	289 / 242
Castors		4 castors	4 castors	4 castors	4 castors
Exterior Finish		Plastified coated steel	Black	Plastified coated steel	Black
Interior Finish		White epoxi	Black	White epoxi	Black
Interior Light		LED	LED	LED	LED
Type of Controller		Electronic	Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic	Automatic
Refrigerant		R290	R290	R290	R290
Refrigerant Charge	g	150	150	150	150
Thermometer		Yes	Yes	Yes	Yes
Energy Class		E	E	E	E
Energy Consumption	kWh/24h	8,9	8,9	11,13	11,13
Annual Energy Cons.	kWh/year	3249	3249	4062,83	4062,83
Input Power	W	1370	1370	1613	1613
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	54	54	55	55
Internal Dimension (WxDxH)	mm	545 x 470 x 870	545 x 470 x 870	821 x 470 x 870	821 x 470 x 870
External Dimension (WxDxH)	mm	640 x 640 x 1540	640 x 640 x 1540	915 x 640 x 1540	915 x 640 x 1540
Packed Dimension (WxDxH)	mm	690 x 710 x 1760	690 x 710 x 1760	970 x 710 x 1760	970 x 710 x 1760
40ft Container Load	pcs	48	48	33	33

ULTIDECKS I 116





2 STORAGE COOLERS EBC Storage Coolers





EBC61Chest cooler

- Low energy consumption
- Easy access to products
- Ideal for storing fresh produce
- Solid lid

Description

Static cooling







The EBC range of chest coolers offers a clean design, a low energy consumption, and easy access to the content inside. It is a great choice for the horeca- and bar segment, as the insides of the cabinet will always maintain a positive temperature and thereby never ruin products that cannot endure frost. Available in several sizes.





EBC35


Chest cooler


- Low energy consumption
- Easy access to products
- Ideal for storing fresh produce
- Solid lid
- Static cooling



EBC45

Chest cooler





- Ideal for storing fresh produce
- Solid lid
- Static cooling



		EBC35	EBC45	EBC53	EBC61
Lid No & Type		1 hinged solid lid			
Temperature Range	°C	+3 to +10	+3 to +10	+3 to +10	+3 to +10
Climate Class		4	4	4	4
Gross / Net Weight	kg	47 / 44	51 / 48	57 / 53	63 / 58
Gross / Net Volume	I	278 / 275	352 / 349	414 / 411	476 / 472
Castors		4 rollers	4 rollers	4 rollers	4 rollers
Exterior Finish		White	White	White	White
Interior Finish		White	White	White	White
Interior Light		LED as option	LED as option	LED as option	LED as option
Lock		Yes	Yes	Yes	Yes
Type of Controller		Mechanical	Mechanical	Mechanical	Mechanical
Type of Cooling		Static	Static	Static	Static
Type of Defrost		Manual	Manual	Manual	Manual
Refrigerant		R600a	R600a	R600a	R600a
Refrigerant Charge	g	60	72	72	77
Thermometer		Yes	Yes	Yes	Yes
Energy Class		В	В	В	В
Energy Consumption	kWh/24h	0,58	0,56	0,66	0,68
Annual Energy Cons.	kWh/year	212	204	241	247
Input Power	W	165	250	320	320
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	44	44	42	41
Internal Dimension (WxDxH)	mm	962 x 472 x 686	1192 x 472 x 686	1382 x 472 x 686	1572 x 472 x 686
External Dimension (WxDxH)	mm	1096 x 696 x 857	1326 x 696 x 857	1516 x 696 x 857	1706 x 696 x 857
Packed Dimension (WxDxH)	mm	1140 x 710 x 880	1370 x 710 x 880	1560 x 710 x 880	1750 x 710 x 880
40ft Container Load	pcs	66	50	46	38

CHEST COOLERS I 120

storage coolers KBAK Storage Coolers





KBAK104

Chest Bottle Cooler

- Low energy consumption
- Impressive storage space
- Removable top for easy loading
- Ideal for storing beer and soft drink crates
- Flat sliding solid lids
- Solid castors
- Static cooling









Easy access storage compartment

Description

The KBAK range of chest bottle coolers offers an incredibly spacious cooling solution for bars, venues, festivals, and events. The compressor compartment is placed below the cooling area rather than build into the side of the unit, which means you can place crates of beer or soft drinks directly on the bottom of the unit and stack them. The sliding lids allow for easy access to the content and can be removed for restocking purposes.



KBAK104PLUS


Chest Bottle Cooler

- Low energy consumption
- Impressive storage space
- Removable top for easy loading
- Ideal for storing beer and soft drink crates
- Strong wheels
- Bumper bars
- Flat sliding solid lids
- Static cooling









		VDAV404	VDA1/404DLLIC
		KBAK104	KBAK104PLUS
Lid No & Type		2 solid sliding lids	2 solid sliding lids
Temperature Range	°C	+1 to +8	+1 to +8
Climate Class		4	4
Gross / Net Weight	kg	70 / 60	70 / 60
Gross / Net Volume	I	250 / 226	250 / 226
Castors		Wheels	Wheels
Exterior Finish		White	White
Interior Finish		White	White
Interior Light		No	No
Lock		Factory Option	Factory Option
Type of Controller		Mechanical	Mechanical
Type of Cooling		Static	Static
Type of Defrost		Manual	Manual
Refrigerant		R600a	R600a
Refrigerant Charge	g	34	34
Thermometer		Yes	Yes
Energy Class		В	В
Energy Consumption	kWh/24h	0,54	0,54
Annual Energy Cons.	kWh/year	198	198
Input Power	W	190	190
Voltage / Frequency	V/Hz	220-240/50	220-240/50
Noise Level	dB(A)	45	45
Internal Dimension (WxDxH)	mm	900 x 500 x 555	900 x 500 x 555
External Dimension (WxDxH)	mm	1025 x 625 x 1000	1025 x 625 x 1000
Packed Dimension (WxDxH)	mm	660 x 1100 x 1060	660 x 1100 x 1060
40ft Container Load	pcs	72	72

CHEST COOLERS I 122

2 STORAGE COOLERS SD Storage Coolers










Lock



SD1380

Storage Cooler

- Reversible solid door
- Fan assisted cooling
- Adjustable shelves
- Adjustable feet





Description

The SD range of storage coolers offers great quality at a competitive price. It has fan assisted cooling and automatic defrost. The cooler can easily be customized to fit your requirements, as it has a reversible door, adjustable feet, and adjustable shelves. It comes in several sizes.



SD1280

Storage Cooler

- Reversible solid door
- Fan assisted cooling
- Adjustable shelves
- Adjustable feet





	<u></u>		
392	259	175	175

		SD1280	SD1380
Door No & Type		1 hinged solid door	1 hinged solid door
Shelves No & Type		4 wire shelves white	5 wire shelves white
Shelf Color		White	White
Shelf Dimensions		498 x 405 mm	498 x 405 mm
Max load on Shelves	kg/m²	171	171
Temperature Range	°C	+2 to +10	+2 to +10
Climate Class		4	4
Gross / Net Weight	kg	82 / 74	70 / 64
Gross / Net Volume	I	290 / 260	372 / 345
Feet / Legs		2 adjustable feet	2 adjustable feet
Castors		2 rollers	2 rollers
Exterior Finish		White	White
Interior Finish		ABS	ABS
Interior Light		No	No
Lock		Yes	Yes
Type of Controller		Mechanical	Mechanical
Type of Cooling		Fan assisted	Fan assisted
Type of Defrost		Automatic	Automatic
Refrigerant		R600a	R600a
Refrigerant Charge	g	70	80
Thermometer		Yes	Yes
Energy Class		D	D
Energy Consumption	kWh/24h	1,7	1,8
Annual Energy Cons.	kWh/year	619	657
Input Power	W	197	215
Voltage / Frequency	V/Hz	220-240/50	220-240/50
Noise Level	dB(A)	45	45
Internal Dimension (WxDxH)	mm	470 x 440 x 1347	470 x 440 x 1555
External Dimension (WxDxH)	mm	595 x 640 x 1635	595 x 640 x 1840
Packed Dimension (WxDxH)	mm	680 x 710 x 1740	680 x 710 x 1940
40ft Container Load	pcs	51	54

storage coolers SDU Storage Coolers





Description

The SDU range of storage coolers offers great quality at a competitive price. It has fan assisted cooling and automatic defrost. The cooler can easily be customized to fit your requirements, as it has a reversible door, adjustable feet, and adjustable shelves. It comes in several sizes.




SDU1220

Storage Cooler

- Reversible solid door
- Fan assisted cooling
- Adjustable shelves
- Adjustable feet









SDU1280

Storage Cooler

- Reversible solid door
- Fan assisted cooling
- Adjustable shelves
- Adjustable feet









50 cl	33 cl	
259	175	1

		SDU1220	SDU1280	SDU1375
Door No & Type		1 hinged solid door	1 hinged solid door	1 hinged solid door
Shelves No & Type		3 wire shelves white	4 wire shelves white	5 wire shelves white
Shelf Color		White	White	White
Shelf Dimensions		498 x 405 mm	498 x 405 mm	498 x 405 mm
Temperature Range	°C	+2 to +10	+2 to +10	+2 to +10
Climate Class		4	4	4
Gross / Net Weight	kg	67 / 63	82 / 74	70 / 64
Gross / Net Volume	I	215 / 190	290 / 260	372 / 345
Feet / Legs		2 adjustable feet	2 adjustable feet	2 adjustable feet
Castors		2 rollers	2 rollers	2 rollers
Exterior Finish		White	White	White
Interior Finish		ABS	ABS	ABS
Interior Light		No	No	No
Lock		Yes	Yes	Yes
Type of Controller		Mechanical	Mechanical	Mechanical
Type of Cooling		Fan assisted	Fan assisted	Fan assisted
Type of Defrost		Automatic	Automatic	Automatic
Refrigerant		R600a	R600a	R600a
Refrigerant Charge	g	70	70	80
Thermometer		Yes	Yes	Yes
Energy Class		D	D	D
Energy Consumption	kWh/24h	1,68	1,7	1,8
Annual Energy Cons.	kWh/year	612	619	657
Input Power	W	197	197	215
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	45	45	45
Internal Dimension (WxDxH)	mm	470 x 440 x 1027	470 x 440 x 1347	470 x 440 x 1555
External Dimension (WxDxH)	mm	595 x 640 x 1315	595 x 640 x 1635	595 x 640 x 1840
Packed Dimension (WxDxH)	mm	680 x 710 x 1410	680 x 710 x 1740	680 x 710 x 1940
40ft Container Load	pcs	54	51	54

storage coolers UR Storage Coolers



New Product



Freezer Option Available



Suitable for Dairy Products



Suitable for Fresh Meat



DID YOU KNOW?

The UR-W1 models are the next generation of UR cabinets, and they use 47 -57% less energy than the previous models.





Designed for GN1/1 pans, not supplied



Strong castors as option

UR600W1

Storage Cooler GN2/1

- Adjustable shelves GN2/1
- · Reversible solid door
- · Integrated handle
- Electronic thermostat
- Fan assisted cooling
- Digital controller and temperature display
- Adjustable feet with rollers to rear
- Lock



Description

The UR range of storage coolers offers high quality and reliability, wrapped in a clean design with an integrated handle. It has fan assisted cooling to ensure a stabile temperature throughout the cabinet, which is easily controlled by an electronic thermostat. It comes in various sizes with adjustable shelves, making it easy to customize the interior to fit your needs.

UR200W1

Storage Cooler

- Integrated handle
- Reversible solid door
- Fan assisted cooling
- Adjustable shelves
- Digital controller and temperature display
- Adjustable feet with rollers to rear
- Lock





UR400W1

Storage Cooler

- Integrated handle
- Reversible solid door
- Fan assisted cooling
- Adjustable shelves
- Digital controller and temperature display
- Adjustable feet with rollers to rear
- Lock



		UR200	UR200W1	UR400W1	UR600W1
Door No & Type		1 hinged solid door			
Shelves No & Type		3 wire shelves white	3 wire shelves white	4 wire shelves white	4 wire shelves white
Shelf Color		White	White	White	White
Shelf Dimensions		505 x 415 mm	503 x 415 mm	503 x 415 mm	GN2/1
Bottom Shelf Dimensions		505 x 220	503x225	503x225	654x330
Max load on Shelves	kg/m²	110	110	110	196
Temperature Range	°C	+2 to +10	-2 to +8	-2 to +8	-2 to +8
Climate Class		4	4	4	4
Gross / Net Weight	kg	49 / 44	54 / 49	82 / 77	107 / 100
Gross / Net Volume	I	136 / 119	129 / 119	361 / 350	620 / 570
Feet / Legs		4 adjustable feet	2 adjustable feet	2 adjustable feet	2 adjustable feet
Castors		2 rollers	2 rollers	2 rollers	2 rollers
Exterior Finish		White	White	White	White
Interior Finish		White ABS	White	White	White
Interior Light		No	No	No	No
Lock		Yes	Yes	Yes	Yes
Type of Controller		Electronic	Electronic	Electronic	Electronic
Type of Cooling		Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost		Automatic	Automatic-Off Cycle	Automatic-Off Cycle	Automatic-Off Cycle
Refrigerant		R600a	R600a	R600a	R600a
Refrigerant Charge	g	35	50	70	70
Thermometer		Yes			
Energy Class		A	A+	Α	Α
Max Ambient		30°C at 55% RH			
Energy Consumption	kWh/24h	1,12	0,59	0,65	0,79
Annual Energy Cons.	kWh/year	409	215	237	288
Power Supply		13 Amp	13 Amp	13 Amp	13 Amp
Input Power	W	105	70	80	95
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	40	45	45	45
Internal Dimension (WxDxH)	mm	510 x 485 x 620	510 x 485 x 620	510 x 485 x 1620	653 x 580 x 1660
External Dimension (WxDxH)	mm	600 x 585 x 855	600 x 615 x 855	600 x 615 x 1855	777 x 745 x 1895
Packed Dimension (WxDxH)	mm	690 x 650 x 910	680 x 680 x 1050	680 x 680 x 2100	840 x 765 x 2100
40ft Container Load	pcs	108	114	51	42



storage coolers UR-S Storage Coolers





Designed for GN1/1 pans, not supplied



Strong castors as option

UR600X1

Storage Cooler GN2/1

- Stainless steel exterior
- Adjustable shelves GN2/1
- · Reversible solid door
- Integrated handle
- Fan assisted cooling
- Digital controller and temperature display
- Adjustable feet with rollers to rear
- Lock



Description

The UR range of storage coolers offers high quality and reliability, wrapped in a clean design with an integrated handle. It has fan assisted cooling to ensure a stabile temperature throughout the cabinet, which is easily controlled by an electronic thermostat. It comes in various sizes with adjustable shelves, making it easy to customize the interior to fit your needs.



UR400X1

Storage Cooler

- Stainless steel exterior
- Integrated handle
- Reversible solid door
- Fan assisted cooling
- Adjustable shelves
- Digital controller and temperature display
- Adjustable feet with rollers to rear
- Lock





UR200X1

Storage Cooler

- Stainless steel exterior
- Integrated handle
- Reversible solid door
- Fan assisted cooling
- Adjustable shelves
- Digital controller and temperature display
- Adjustable feet with rollers to rear
- Lock



		UR200S	UR200X1	UR400X1	UR600X1
Door No & Type		1 hinged solid door			
Shelves No & Type		3 wire shelves white	3 wire shelves white	4 wire shelves white	4 wire shelves white
Shelf Color		White	White	White	White
Shelf Dimensions		505 x 415 mm	503 x 415 mm	503 x 415 mm	GN2/1
Bottom Shelf Dimensions		505 x 220	503x225	503x225	654x330
Max load on Shelves	kg/m²	110	110	110	196
Temperature Range	°C	+2 to +10	-2 to +8	-2 to +8	-2 to +8
Climate Class		4	4	4	4
Gross / Net Weight	kg	49 / 44	54 / 49	82 / 77	107 / 100
Gross / Net Volume	I	136 / 119	129 / 119	361 / 350	620 / 570
Feet / Legs		4 adjustable feet	2 adjustable feet	2 adjustable feet	2 adjustable feet
Castors		2 rollers	2 rollers	2 rollers	2 rollers
Exterior Finish		SS430	SS430	SS430	SS430
nterior Finish		White ABS	White	White	White
nterior Light		No	No	No	No
Lock		Yes	Yes	Yes	Yes
Type of Controller		Electronic	Electronic	Electronic	Electronic
Type of Cooling		Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost		Automatic	Automatic-Off Cycle	Automatic-Off Cycle	Automatic-Off Cycle
Refrigerant		R600a	R600a	R600a	R600a
Refrigerant Charge	g	35	50	70	70
Thermometer		Yes			
Energy Class		A	A+	Α	Α
Max Ambient		30°C at 55% RH			
Energy Consumption	kWh/24h	1,12	0,59	0,65	0,79
Annual Energy Cons.	kWh/year	409	215	237	288
Power Supply		13 Amp	13 Amp	13 Amp	13 Amp
nput Power	W	105	70	80	95
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	40	45	45	45
nternal Dimension (WxDxH)	mm	510 x 485 x 620	510 x 485 x 620	510 x 485 x 1620	653 x 580 x 1660
External Dimension (WxDxH)	mm	600 x 585 x 855	600 x 615 x 855	600 x 615 x 1855	777 x 745 x 1895
Packed Dimension (WxDxH)	mm	690 x 650 x 910	680 x 680 x 1050	680 x 680 x 2100	840 x 765 x 2100
40ft Container Load	pcs	108	114	51	42



freezing, adapting to current sales trends has never been simpler.



FREEZERS / COOLERS Impulse Coolers / Freezers





UHD201/Black

Black impulse cooler/freezer

- Freezer / Cooler
- Ideal for impulse sales
- Sliding glass lids
- Glass sides for better presentation of products
- Impressive storage space
- Ventilated cooling
- · Castors with brake
- Bumper bars on 4 sides









Adjustable false base

Description

The UHD201 /Black impulse cooler is perfect for stimulating impulse purchases. It has glass on all four sides as well as glass sliding lids for great product visibility. The unit can be switched between cooling and freezing, so you can adapt it to your needs. It offers an impressive amount of storage space compared to its size. Ventilated cooling ensures a uniform temperature throughout the unit.



UHD201 /BlackBlack impulse cooler/freezer

		UHD201 /Black
Lid No & Type		2 flat sliding glass lids
Total Display Area	m²	0,84
Temperature Range	°C	-2 to 5 / -24 to -18
Climate Class		3
Gross / Net Weight	kg	142 / 132
Gross / Net Volume	ī	200 / 165
Castors		4 wheels, 2 with brake
Exterior Finish		Black RAL9005
Interior Finish		Coated steel
Interior Light		LED Horizontal
Lock		No
Type of Controller		Electronic
Type of Cooling		Ventilated
Type of Defrost		Automatic, hot gas
Refrigerant		R290
Refrigerant Charge	g	310
Thermometer		Yes
Energy Class		F
Energy Consumption	kWh/24h	11,05
Annual Energy Cons.	kWh/year	4032
Input Power	W	661
Voltage / Frequency	V/Hz	220-240/50
Noise Level	dB(A)	50
Internal Dimension (WxDxH)	mm	1075 x 705 x 295
External Dimension (WxDxH)	mm	1255 x 1015 x 962
Packed Dimension (WxDxH)	mm	1400 x 1100 x 1120
40ft Container Load	pcs	32

IPULSE CABINETS I

FREEZERS / COOLERS TWIN Freezers/Coolers





Site Survey



TWIN 220A-CF

Antracite Supermarket Cooler/Freezer



- Occupies less floor space
- · Increased reliability
- Low energy consumption
- Save on total expenses (operation plus investment costs)
- Bumper bars
- Static cooling
- Automatic defrost
- 2 cooling systems for redundancy
- Ticket strips as accessory









Shelf as accessory

Description


The TWIN range of supermarket units features an innovative design, ideal for stores with limited space. One TWIN unit has the same volume as two standard chest freezers/coolers of the same length placed back-to-back. As the TWIN model takes up less floor space, the result is more storage with a smaller footprint. It also has the great function of two cooling systems for redundancy.





TWIN 220B-CF

Black Supermarket Cooler / Freezer



- Occupies less floor space
- Increased reliability
- Low energy consumption
- Save on total expenses (operation plus investment costs)
- Bumper bars
- · Static cooling
- Automatic defrost
- 2 cooling systems for redundancy
- Ticket strips as accessory

TWIN HEAD B-CF





- Freezing unit
- Occupies less floor space
- Increased reliability
- Low energy consumption
- Save on total expenses (operation plus investment costs)
- Bumper bars
- Static cooling
- Automatic defrost
- 2 cooling systems for redundancy
- Ticket strips as accessory

Tierce strips as accessory			Heree samps as accessory		
		TWIN 220A-CF	TWIN 220B-CF	TWIN HEAD B-CF	
Lid No & Type		2 curved sliding temp. glass lids	2 curved sliding temp. glass lids	2 curved sliding temp. glass lids	
Total Display Area	m²	2,65	2,65	0,65	
Basket No & Type					
Number of dividers	pcs	4	4	3	
Temperature Range	°C	-24 to -18 / -1 to +15	-24 to -18 / -1 to +15	-24 to -18 / -1 to +15	
Climate Class		3	3	3	
Gross / Net Weight	kg	251 / 198	251 / 198	125 / 85	
Gross / Net Volume	1	1697 / 1255	1697 / 1255	425 / 334	
Feet / Legs		4 adjustable legs	4 adjustable legs	4 adjustable legs	
Exterior Finish		Anthracite RAL 7016	Black	Black	
Interior Finish		Powder coated steel	Powder coated steel	Powder coated steel	
Interior Light		LED	LED	LED	
Type of Controller		Electronic	Electronic	Electronic	
Type of Cooling		Static	Static	Static	
Type of Defrost		Automatic	Automatic	Automatic	
Refrigerant		R290	R290	R290	
Refrigerant Charge	g	2 x 85	2 x 85	80	
Thermometer		Yes	Yes	Yes	
Energy Class		С	С	С	
Energy Consumption	kWh/24h	9,2	9,2	4,1	
Annual Energy Cons.	kWh/year	3358	3358	1496	
Input Power	W	522	522	267	
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	
Noise Level	dB(A)	48	48	46	
Internal Dimension (WxDxH)	mm	2000 x 1175 x 700	2000 x 1175 x 700	1190 x 605 x 620	
External Dimension (WxDxH)	mm	2150 x 1465 x 930	2150 x 1465 x 930	1470 x 812 x 915	
Packed Dimension (WxDxH)	mm	2240 x 1550 x 1030	2240 x 1550 x 1030	1530 x 1000 x 1050	
40ft Container Load	pcs	14	14	30	

PERMARKET UNITS I

SFI Supermarket Freezers/Coolers



DID YOU KNOW?

The SFI range is available in white or black as standard - all with variable speed for a lower energy use.




SFI250-CF VS

Supermarket Cooler / Freezer

- Easily switchable between cooler and freezer
- Energy saving variable speed compressor
- · Excellent product visibility
- Sliding curved lids
- Ideal in combination with our top section MTF
- · Adjustable false base
- LED interior light
- Bumper bars
- Union kit for island creation is available as option







Adjustable false base

Description

The SFI-CF range of energy efficient supermarket chest coolers/freezers is available in several sizes and colors, and offers great visibility of the products inside with its curved sliding glass lids. The content is illuminated by LED lighting on the back wall of the freezer. Adjustable false bases between the dividers make it possible to raise the height of the base inside the unit, so it always looks fully stocked. Perfect for supermarkets, grocery shops, butchers etc.



SFI145-CF VS

Supermarket Cooler / Freezer



- Easily switchable between cooler and freezer
- Energy saving variable speed compressor
- Excellent product visibility
- Sliding curved lids
- Ideal in combination with our top section MTF
- Adjustable false base
- LED interior light
- Bumper bars
- Union kit for island creation is available as option



SFI185-CF VS

Supermarket Cooler / Freezer



- Easily switchable between cooler and freezer
- Energy saving variable speed compressor
- Excellent product visibility
- Sliding curved lids
- Ideal in combination with our top section MTF
- Adjustable false base
- LED interior light
- Bumper bars
- Union kit for island creation is available as option

		SFI145-CF VS	SFI185 HC-CF VS	SFI185-CF VS	SFI210-CF VS	SFI250-CF VS
Lid No & Type		2 curved sliding glass lids				
Total Display Area	m²	0,96	1,25	1,25	1,44	1,73
Basket No & Type						
Divider System		Yes	Yes	Yes	Yes	Yes
Number of dividers	pcs	2	4	3	4	5
Temperature Range	°C	-24 to -18 / -1 to +8				
Climate Class		4	4	4	4	4
Gross / Net Weight	kg	139 / 121	165 / 150	165 / 150	180 / 164	220 / 201
Gross / Net Volume	I	715 / 422	786 / 500	786 / 500	908 / 584	1104 / 718
Feet / Legs		6 adjustable legs				
Exterior Finish		White	White	White	White	White
Interior Finish		White painted steel				
Interior Light		LED Horizontal				
Type of Controller		Electronic	Electronic	Electronic	Electronic	Electronic
Type of Cooling		Static	Static	Static	Static	Static
Type of Defrost		Automatic, hot gas				
Refrigerant		R290	R290	R290	R290	R290
Refrigerant Charge	g	100	110	110	125	130
Thermometer		Yes	Yes	Yes	Yes	Yes
Energy Class		С	С	С	С	С
Max Ambient		30°C 55% RH	30°C 55% RH	30°C 55% RH	30°C 55% RH	30°C at 55% RH
Energy Consumption	kWh/24h	4,25	4,31	4,56	4,93	5,51
Annual Energy Cons.	kWh/year	1551,25	1573,15	1664,4	1799,45	2011,15
Power Supply		13 Amp				
Input Power	W	384	890	890	890	890
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	48	48	48	48	48
nternal Dimension (WxDxH)	mm	1320 x 720 x 627	1720 x 720 x 627	1720 x 720 x 627	1970 x 720 x 627	2370 x 720 x 627
External Dimension (WxDxH)	mm	1456 x 858 x 890	1856 x 858 x 832	1856 x 858 x 890	2106 x 858 x 890	2506 x 858 x 890
Packed Dimension (WxDxH)	mm	1520 x 915 x 980	1920 x 915 x 920	1920 x 915 x 980	2170 x 915 x 980	2570 x 915 x 980
10ft Container Load	pcs	26	26	26	26	16

IDEDMADKET LINITS I

MTF Supermarket Freezers/Coolers



DID YOU KNOW?

MTF supermarket wall units are available in black or white, with or without variable speed. SFI horizontal units are a perfect match underneath.


MTF250 VS

Wall Freezer/Cooler

- Easily switchable between cooler and freezer
- · Ideal for optimizing store space
- Side-to-center ventilated cooling
- Ideal with chest cooler / freezer underneath
- · Energy saving variable speed compressor
- · Heated self-closing glass doors
- Automatic defrost
- Telescopic legs









Digital thermostat

Description

The MTF range of supermarket wall freezers/coolers is ideal for maximizing store space with a SFI chest cooler or freezer underneath. It is easily switchable between cooler and freezer, and features side-to-center ventilated cooling, heated self-closing doors, and automatic defrost. Can be placed against a wall or installed as a stunning island display.



MTF210

Wall Freezer/Cooler

- Side-to-center ventilated cooling
- Ideal for optimizing store space
- Easily switchable between cooler and freezer
- Ideal with chest cooler / freezer underneath
- Heated self-closing glass doors
- Automatic defrost
- Telescopic legs



MTF210 VS

D A G

Wall Freezer/Cooler

- C A
- Easily switchable between cooler and freezer
- Ideal for optimizing store space
- Side-to-center ventilated cooling
- Ideal with chest cooler / freezer underneath
- Energy saving variable speed compressor
- Heated self-closing glass doors
- Automatic defrost
- Telescopic legs

		MTF185	MTF185 VS	MTF210	MTF210 VS	MTF250	MTF250 VS
Door No & Type		3 self-closing heated	3 self-closing heated	3 self-closing heated	3 self-closing heated	4 self-closing heated	4 self-closing heate
Total Display Area	m²	1	1	1,44	1,44	1,73	1,73
Door Reversible		No	No	No	No	No	No
Shelves No & Type		9 adjustable wire	9 adjustable wire	9 adjustable wire	9 adjustable wire	12 adjustable wire	12 adjustable wire
Shelf Color		White	White	White	White	White	White
Shelf Dimensions		510x423	510x423	595x423	595x423	516x423	516x423
Bottom Shelf Dimensions		510 x 375	510 x 375	595 x 375	595 x 375	516 x 375	516 x 375
Max load on Shelves	kg/m²	196	196	196	196	196	196
Temperature Range	°C	-24 to -18 / -1 to +8					
Climate Class		4	4	4	4	4	4
Gross / Net Weight	kg	334 / 272	334 / 272	355 / 288	355 / 288	450 / 300	450 / 300
Gross / Net Volume	I	779 / 545	779 / 545	893 / 628	893 / 628	1076 / 650	1076 / 650
Feet / Legs		Strong stand					
Exterior Finish		White	White	White	White	White	White
nterior Finish		White painted steel	White painted stee				
nterior Light		LED	LED	LED	LED	LED	LED
Lock		No	No	No	No	No	No
Type of Controller		Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
Refrigerant		R290	R290	R290	R290	R290	R290
Refrigerant Charge	g	135	135	145	145	145	145
Thermometer		Yes	Yes	Yes	Yes	Yes	Yes
Energy Class		D	С	D	С	E	С
Energy Consumption	kWh/24h	14,57	7,32	16,35	7,49	23,92	9,16
Annual Energy Cons.	kWh/year	5318	2672	5971	2732	8731	3344
nput Power	W	1057	1057	1040	1040	1072	1072
/oltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	58	58	58	58	58	58
nternal Dimension (WxDxH)	mm	1730 x 480 x 947	1730 x 480 x 947	1980 x 480 x 947	1980 x 480 x 947	2380 x 480 x 947	2380 x 480 x 947
external Dimension (WxDxH)	mm	1850 x 745 x 2430	1850 x 745 x 2430	2100 x 745 x 2430	2100 x 745 x 2430	2500 x 745 x 2430	2500 x 745 x 2430
Packed Dimension (WxDxH)	mm	1975 x 790 x 1630	1975 x 790 x 1630	2225 x 790 x 1630	2225 x 790 x 1630	2625 x 790 x 1630	2625 x 790 x 1630
10ft Container Load	pcs	15	15	15	15	8	8

WALL UNITS I 140





FREEZERS Tabletop Freezers





Lock



Adjustable shelves



UF100GCP

Tabletop Freezer

- Static cooling
- Self-closing glass door
- Adjustable shelves
- Adjustable feet
- LED interior light with switch
- LED illuminated canopy
- Heated glass to help prevent condensation
- Replaceable door gasket
- Lock



Description

The UF-GCP range of tabletop display freezers comes with a LED illuminated canopy that will help attract the attention of customers. It is easy to customize to fit your requirements, as it has adjustable shelves and feet. Place the freezer on the counter for stimulating impulse sales.

UF100G

Tabletop Freezer

- Static cooling
- Self-closing glass door
- Adjustable shelves
- Adjustable feet
- LED interior light with switch
- Heated glass to help prevent condensation
- Replaceable door gasket
- Lock





UF50G

Tabletop Freezer

- Static cooling
- Self-closing glass door
- Adjustable shelves
- Adjustable feet
- LED interior light with switch
- Heated glass to help prevent condensation
- Lock
- Replaceable door gasket



		UF100G	UF100GCP	UF50G	UF50GCP
Door No & Type		1 heated hinged glass door			
Total Display Area	m²	0,27	0,29	0,23	0,23
Door Reversible		No	No	No	No
Shelves No & Type		3 wire shelves white	3 wire shelves white	2 wire shelves white	2 wire shelves white
Shelf Color		White	White	White	White
Shelf Dimensions		485 x 420 / 200 mm	485 x 420 / 200 mm	440 x 210 mm	440 x 210 mm
Canopy Type		-	Curved	-	Curved
Temperature Range	°C	-24 to -12	-24 to -12	-24 to -12	-24 to -12
Climate Class		4	4	4	4
Gross / Net Weight	kg	49 / 44	59 / 54	39 / 34	46 / 42
Gross / Net Volume	I	90 / 88	116 / 113	50 / 48	50 / 48
Feet / Legs		4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Exterior Finish		White	White	White	White
Interior Finish		Coated aluminium	Coated aluminium	Coated aluminium	Coated aluminium
Interior Light		LED	LED	LED	LED
Lock		Yes	Yes	Yes	Yes
Type of Controller		Mechanical	Mechanical	Mechanical	Mechanical
Type of Cooling		Static	Static	Static	Static
Type of Defrost		Manual	Manual	Manual	Manual
Refrigerant		R290	R290	R290	R290
Refrigerant Charge	g	60	60	45	45
Thermometer		No	No	No	No
Energy Class		С	С	С	С
Energy Consumption	kWh/24h	3,18	3,41	2,53	2,82
Annual Energy Cons.	kWh/year	1159	1245	923	1031
Input Power	W	230	230	154	154
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	45	45	45	45
Internal Dimension (WxDxH)	mm	500 x 430 x 540	500 x 430 x 540	450 x 420 x 380	450 x 420 x 380
External Dimension (WxDxH)	mm	610 x 540 x 670	610 x 555 x 890	570 x 530 x 520	570 x 530 x 657
Packed Dimension (WxDxH)	mm	640 x 600 x 740	650 x 590 x 960	610 x 560 x 580	610 x 600 x 730
40ft Container Load	pcs	171	114	304	171

Atom Maxi Freezers



Available



Suitable for **Dairy Products**



Suitable for Fresh Meat



Atom Maxi F3DB

Display Freezer

- Perfect display for frozen foods
- Low energy consumption
- Self-closing heated glass doors
- Triple glazed insulated glass
- · Adjustable shelves behind each door
- Ventilated cooling
- Internal vertical LED light
- · Stainless steel base with mirror effect
- Digital controller and temperature display
- Castors
- Cooler option available





Adjustable shelves behind each door



black interior.

Digital controller

Description

The Atom Maxi range of display freezers offers great quality at a competitive price. It comes with or 1, 2 or 3 selfclosing glass doors, LED lighting, and adjustable shelves for optimal product presentation. It has an efficient ventilated cooling system, automatic defrost, and an easy-to-use temperature controller. Also available in a cooler version.





D A

Atom Maxi F1DBB

Display Freezer

- Perfect display for frozen foods
- Black interior and exterior
- Low energy consumption
- Self-closing heated glass doors
- Triple glazed insulated glass
- Adjustable shelves behind each door
- Ventilated cooling
- Internal vertical LED light
- Stainless steel base with mirror effect
- Digital controller and temperature display

Atom Maxi F2DBB

Display Freezer

- Perfect display for frozen foods
- Black interior and exterior
- Low energy consumption
- Self-closing heated glass doors
- Triple glazed insulated glass
- Adjustable shelves behind each door
- Ventilated cooling
- Internal vertical LED light
- Stainless steel base with mirror effect
- Digital controller and temperature display
- Cooler option available



				cooler optiv			
		Atom Maxi F1DB	Atom Maxi F1DBB	Atom Maxi F2DB	Atom Maxi F2DBB	Atom Maxi F3DB	Atom Maxi F3DBE
Door No & Type		1 hinged glass door	1 hinged glass door	2 hinged glass doors	2 hinged glass doors	3 hinged glass doors	3 hinged glass doors
Total Display Area	m²	0,84	0,84	1,39	1,39	2,09	2,09
Door Reversible		No	No	No	No	No	No
Shelves No & Type		5 adjustable	5 adjustable	10 adjustable	10 adjustable	15 adjustable	15 adjustable
Shelf Color		White	Black	White	Black	White	Black
Shelf Dimensions		610 x 470 mm	610 x 470 mm	551 x 470 mm	551 x 470 mm	551 x 470 mm; 624 x	551 x 470 mm ; 624 x
Max load on Shelves	kg/m²	140	140	140	140	140	140
Temperature Range	°C	-18 to -22	-18 to -22	-18 to -22	-18 to -22	-18 to -22	-18 to -22
Climate Class		3	3	3	3	3	3
Gross / Net Weight	kg	158.5 / 150	158.5 / 150	270 / 240	270 / 240	355 / 305	355 / 305
Gross / Net Volume	I	560 / 390	560 / 390	1006 / 702	1006 / 702	1563 / 1090	1563 / 1090
Castors		4 castors	4 castors	4 castors	4 castors	6 castors	6 castors
Exterior Finish		Black RAL9005	Black RAL9005	Black RAL9005	Black RAL9005	Black RAL9005	Black RAL9005
Interior Finish		White RAL9003	Black	White RAL9003	Black	White RAL9003	Black
Interior Light		LED	LED	LED	LED	LED	LED
Type of Controller		Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
Refrigerant		R290	R290	R290	R290	R290	R290
Refrigerant Charge	g	85	85	2 x 80	2 x 80	2 x 95	2 x 95
Thermometer		Yes	Yes	Yes	Yes	Yes	Yes
Energy Class		С	С	D	D	D	D
Max Ambient		25°C at 60% RH	25°C at 60% RH	25°C at 60% RH	25°C at 60% RH	25°C at 60% RH	25°C at 60% RH
Energy Consumption	kWh/24h	9,07	9,07	17,47	17,47	23,84	23,84
Annual Energy Cons.	kWh/year	3311	3311	6377	6377	8702	8702
Power Supply		13 Amp	13 Amp	13 Amp	13 Amp	13 Amp	13 Amp
Input Power	W	600	600	1205	1205	1280	1280
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	61	61	65	65	70	70
Internal Dimension (WxDxH)	mm	630 x 580 x 1538	630 x 580 x 1538	1133 x 580 x 1538	1133 x 580 x 1538	1760 x 580 x 1538	1760 x 580 x 1538
External Dimension (WxDxH)	mm	750 x 760 x 2003	750 x 760 x 2003	1253 x 760 x 2003	1253 x 760 x 2003	1880 x 760 x 2003	1880 x 760 x 2003
Packed Dimension (WxDxH)	mm	775 x 775 x 2090	775 x 775 x 2090	1278 x 780 x 2090	1278 x 780 x 2090	1905 x 780 x 2090	1905 x 780 x 2090
40ft Container Load	pcs	45	45	27	27	18	18



UF Upright Display Freezers







Ventilated cooling



Digital thermostat

UF400VG

Display Freezer

- Heated glass door
- Electronic thermostat
- Automatic defrost
- · Adjustable shelves
- LED interior light
- Ventilated cooling
- Lock
- Adjustable feet with rollers to rear



Description

model.

The UF-VG range of display freezers is the ventilated version of our white glass door freezers. It comes in a variety of sizes and offers great flexibility with adjustable shelves. The effective ventilated refrigeration system ensures an even temperature throughout the cabinet. The temperature can be set on an easy-to-use digital thermostat display. Defrost happens automatically.



UF400G

Display Freezer

- Heated glass door
- Electronic thermostat
- Static cooling
- Lock
- Fixed freezing shelves
- Adjustable feet with rollers to rear
- LED interior light





UF200G

Display Freezer

- Heated glass door
- Electronic thermostat
- Static cooling
- Lock
- Fixed freezing shelves
- Adjustable feet with rollers to rear
- LED interior light



		UF200G	UF200VG	UF400G	UF400VG
Door No & Type		1 hinged heated glass door			
Total Display Area	m²	0,26	0,24	0,72	0,61
Door Reversible		No	No	No	No
Shelves No & Type		2 fixed freezing shelves	3 wire shelves white	7 fixed freezing shelves	4 wire shelves white
Shelf Color		White	White	White	White
Shelf Dimensions		490 x 380 mm	490 x 380 mm	490 x 420 mm	490 x 420 mm
Max load on Shelves	kg/m²	110	110	110	110
Temperature Range	°C	-24 to -10	-24 to -10	-24 to -10	-24 to -10
Climate Class		4	4	4	4
Gross / Net Weight	kg	52 / 47	52 / 47	85 / 80	85 / 80
Gross / Net Volume	T	200 / 120	200 / 120	400 / 340	400 / 340
Feet / Legs		4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Castors		2 rollers	2 rollers	2 rollers	2 rollers
Exterior Finish		White	White	White	White
Interior Finish		White ABS	White ABS	White ABS	White ABS
Interior Light		LED	LED	LED	LED
Lock		Yes	Yes	Yes	Yes
Type of Controller		Electronic	Electronic	Electronic	Electronic
Type of Cooling		Static	Ventilated	Fan assisted	Ventilated
Type of Defrost		Manual	Automatic, electric	Manual	Automatic, electric
Refrigerant		R290	R290	R290	R290
Refrigerant Charge	g	50	45	110	80
Thermometer		Yes	Yes	Yes	Yes
Energy Class		D	D	С	С
Max Ambient		30°C at 55% RH			
Energy Consumption	kWh/24h	5,48	6,21	5,29	7,3
Annual Energy Cons.	kWh/year	2001	2268	1930	2664
Power Supply		13 Amp	13 Amp	13 Amp	13 Amp
Input Power	W	270	150	380	300
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	40	42	40	42
Internal Dimension (WxDxH)	mm	484 x 470 x 620	484 x 470 x 620	484 x 470 x 1620	484 x 470 x 1620
External Dimension (WxDxH)	mm	600 x 585 x 855	600 x 595 x 850	600 x 585 x 1855	600 x 595 x 1855
Packed Dimension (WxDxH)	mm	690 x 650 x 910	690 x 650 x 910	690 x 650 x 2050	690 x 650 x 2050
40ft Container Load	pcs	108	108	54	54

UF Upright Stainless Steel Freezers







Ventilated cooling



Adjustable shelves

UF400VSG

Display Freezer

- Stainless steel cabinet
- · Heated glass door
- Electronic thermostat
- Automatic defrost
- Adjustable shelves
- LED interior light
- Ventilated cooling
- Lock
- Adjustable feet with rollers to rear
- Digital temperature display



Description

The UF-VSG range of display freezers is the ventilated version of our stainless steel glass door freezers. It comes in a variety of sizes and offers great flexibility with adjustable shelves. The effective ventilated refrigeration system ensures an even temperature throughout the cabinet. The temperature can be set on an easy-to-use digital thermostat display. Defrost happens automatically.



UF400SG

Display Freezer

- Stainless steel cabinet
- Heated glass door
- Electronic thermostat
- Lock
- Fixed freezing shelves
- LED interior light
- Adjustable feet with rollers to rear





UF200SG

Display Freezer

- Stainless steel cabinet
- Heated glass door
- Electronic thermostat
- Lock
- Fixed freezing shelves
- LED interior light
- Adjustable feet with rollers to rear



		UF200SG	UF200VSG	UF400SG	UF400VSG
Door No & Type		1 hinged heated glass door			
Total Display Area	m²	0,26	0,24	0,72	0,61
Door Reversible		No	No	No	No
Shelves No & Type		2 fixed freezing shelves	3 wire shelves white	7 fixed freezing shelves	4 wire shelves white
Shelf Color		White	White	White	White
Shelf Dimensions		490 x 380 mm	490 x 380 mm	490 x 420 mm	490 x 420 mm
Max load on Shelves	kg/m²	110	110	110	110
Temperature Range	°C	-24 to -10	-24 to -10	-24 to -10	-24 to -10
Climate Class		4	4	4	4
Gross / Net Weight	kg	52 / 47	52 / 47	85 / 80	85 / 80
Gross / Net Volume	I	200 / 120	200 / 120	400 / 340	400 / 340
Feet / Legs		4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Castors		2 rollers	2 rollers	2 rollers	2 rollers
Exterior Finish		SS430	SS430	SS430	SS430
Interior Finish		White ABS	White ABS	White ABS	White ABS
Interior Light		LED	LED	LED	LED
Lock		Yes	Yes	Yes	Yes
Type of Controller		Electronic	Electronic	Electronic	Electronic
Type of Cooling		Static	Ventilated	Static	Ventilated
Type of Defrost		Manual	Automatic, electric	Manual	Automatic
Refrigerant		R290	R290	R290	R290
Refrigerant Charge	g	50	45	110	80
Thermometer		Yes	Yes	Yes	Yes
Energy Class		D	D	C	С
Max Ambient		30°C at 55% RH			
Energy Consumption	kWh/24h	5,48	6,21	5,29	7,3
Annual Energy Cons.	kWh/year	2001	2268	1930	2664
Power Supply		13 Amp	13 Amp	13 Amp	13 Amp
Input Power	W	270	150	380	300
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	40	42	40	42
Internal Dimension (WxDxH)	mm	484 x 470 x 620	484 x 470 x 620	484 x 470 x 1620	484 x 470 x 1620
External Dimension (WxDxH)	mm	600 x 585 x 855	600 x 600 x 850	600 x 585 x 1855	600 x 585 x 1855
Packed Dimension (WxDxH)	mm	690 x 650 x 910	690 x 650 x 910	690 x 650 x 2050	690 x 650 x 2050
40ft Container Load	pcs	108	108	54	54

UFSC Display Freezers



UFSC1600GCP

Display Freezer

- Adjustable shelves
- 2 separate cooling systems (higher safety)
- Improved product presentation
- Improved ventilated cooling
- LED illuminated canopy
- LED light in door frame
- · Less maintenance







Adjustable shelves

Digital thermostat

Description

Our UFSC range of display freezers can help you showcase your frozen food items in the best way possible. It is a flexible freezing solution, where you can adjust the height of the shelves according to the content. Easy to clean, restock, and has a very low energy consumption.



UFSC1450GCP NF

Display Freezer

- Adjustable shelves
- Energy efficient cooling system
- Great product presentation
- Automatic defrost
- Ventilated cooling
- LED illuminated canopy
- Heated self-closing glass door
- LED interior light
- Adjustable feet





UFSC1450GCP NF Silver

Display Freezer

- Adjustable shelves
- Energy efficient cooling system
- Great product presentation
- Automatic defrost
- Ventilated cooling
- LED illuminated canopy
- Heated self-closing glass door
- LED interior light
- Adjustable feet



		UFSC1450GCP NF	UFSC1450GCP NF Silver	UFSC1600GCP
Door No & Type		1 hinged heated self-closing glass door	1 hinged heated self-closing glass door	3 hinged self-closing glass doors
Total Display Area	m²	0,78	0,78	1,53
Door Reversible		No	No	No
Shelves No & Type		5 adjustable wire shelves, white	5 adjustable wire shelves, white	15 adjustable
Shelf Color		White	White	White
Shelf Dimensions		543 x 485 mm	543 x 485 mm	465/535 x 470 mm
Max load on Shelves	kg/m²	196	196	
Canopy Type		L-Shape	L-Shape	D-Shape
Temperature Range	°C	-22 to -12	-22 to -12	-23 to -18
Climate Class		4	4	4
Gross / Net Weight	kg	148 / 125	148 / 125	219 / 214
Gross / Net Volume	I	544 / 440	544 / 440	1252 / 891
Feet / Legs		2 adjustable feet	2 adjustable feet	6 adjustable feet
Castors		4 rollers	4 rollers	6 wheels
Exterior Finish		White	White	White
Interior Finish		White painted steel	White painted steel	White
Interior Light		LED	LED	LED
Lock		Yes	Yes	No
Type of Controller		Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic
Refrigerant		R290	R290	R290
Refrigerant Charge	g	110	110	260
Thermometer		Yes	Yes	Yes
Energy Class		С	С	D
Max Ambient		30°C at 55% RH	30°C at 55% RH	30°C at 55% RH
Energy Consumption	kWh/24h	8,64	8,64	16,58
Annual Energy Cons.	kWh/year	3154	3154	6052
Power Supply		13 Amp	13 Amp	13 Amp
Input Power	W	700	700	1555
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	55	55	53
Internal Dimension (WxDxH)	mm	565 x 568 x 1660	565 x 568 x 1660	1480 x 568 x 1518
External Dimension (WxDxH)	mm	680 x 761 x 2149	680 x 761 x 2149	1600 x 762 x 2073
Packed Dimension (WxDxH)	mm	745 x 785 x 2275	745 x 785 x 2275	1675 x 805 x 2124
40ft Container Load	pcs	47	47	14

FREEZERS

UFSC371 Display Freezers







Strong handle



Lock

UFSC371G Black Black Display Freezer

- Black interior and exterior
- Heated glass to help prevent condensation
- LED interior light with switch
- · Digital temperature display
- · Fixed freezing shelves
- Lock
- Adjustable feet
- · Defrost water drain



Description

coolers.

The UFSC range of display freezers offers great product presentation and a competitive price. It has a heated glass door to prevent condensation and a defrost drain for easy maintenance. It has static cooling and fixed freezer shelves with built-in evaporator coils to ensure an even temperature throughout the cabinet. The display freezer comes in black and white, with or without an illuminated canopy.



UFSC371GCP

Display Freezer

- Illuminated canopy
- Heated glass to help prevent condensation
- LED interior light with switch
- Fixed freezing shelves
- Defrost water drain
- Digital temperature display
- Adjustable feet
- Lock





UFSC371G

Display Freezer

- Great product presentation
- Heated glass door
- Fixed freezing shelves
- Internal LED light
- Digital thermometer
- Defrost water drain
- Adjustable feet



		UFSC371G	UFSC371G Black	UFSC371G Black L/H	UFSC371GCP	UFSC371GCP Black
Door No & Type		1 heated hinged glass	1 heated hinged glass			
Total Display Area	m²	0,74	0,74	0,74	0,74	0,74
Door Reversible		No	No	No	No	No
Shelves No & Type		6 fixed freezing shelves	6 fixed freezing shelve			
Shelf Color		Chrome	Chrome	Chrome	Chrome	Chrome
Shelf Dimensions		470 x 413 mm	470 x 413 mm			
Max load on Shelves	kg/m²	110	110	110	110	110
Canopy Type					D-Shape	D-Shape
Temperature Range	°C	-24 to -14	-24 to -14	-24 to -14	-24 to -14	-24 to -14
Climate Class		4	4	4	4	4
Gross / Net Weight	kg	100 / 95	100 / 95	100 / 95	100 / 95	103 / 98
Gross / Net Volume	I	300 / 270	300 / 270	300 / 270	300 / 270	300 / 270
Feet / Legs		2 adjustable feet	2 adjustable feet	2 adjustable feet	2 adjustable feet	2 adjustable feet
Castors		2 rollers	2 rollers	2 rollers	2 rollers	2 rollers
Exterior Finish		White	Black	Black	White	Black
Interior Finish		White	Black	Black	White	Black
Interior Light		LED	LED	LED	LED	LED
Lock		Yes	Yes	Yes	Yes	Yes
Type of Controller		Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Type of Cooling		Static	Static	Static	Static	Static
Type of Defrost		Manual	Manual	Manual	Manual	Manual
Refrigerant		R290	R290	R290	R290	R290
Refrigerant Charge	g	85	85	85	85	85
Thermometer		Yes	Yes	Yes	Yes	Yes
Energy Class		С	С	C	С	С
Max Ambient		30°C at 55% RH	30°C at 55% RH			
Energy Consumption	kWh/24h	8,27	8,27	8,27	8,32	8,32
Annual Energy Cons.	kWh/year	3017	3017	3017	3035	3035
Power Supply		13 Amp	13 Amp	13 Amp	13 Amp	
Input Power	W	350	350	350	570	570
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	45	45	45	40	40
Internal Dimension (WxDxH)	mm	470 x 440 x 1545	470 x 440 x 1545			
External Dimension (WxDxH)	mm	595 x 640 x 1840	595 x 640 x 1840	595 x 640 x 1840	595 x 640 x 1980	595 x 640 x 1980
Packed Dimension (WxDxH)	mm	680 x 710 x 1940	680 x 710 x 1940	680 x 710 x 1940	680 x 710 x 2050	680 x 710 x 2050
40ft Container Load	pcs	54	54	54	54	54

UFFS371 Display Freezers







Strong handle



Lock

UFFS371GCP

Display Freezer

- Great product presentation
- Illuminated canopy
- · Heated glass door
- Fixed freezing shelves
- Internal LED light
- Digital thermometer
- Defrost water drain
- Adjustable feet



Description

The UFFS range of display freezers offers great product presentation and a competitive price. It has a heated glass door to prevent condensation and a defrost drain for easy maintenance. It has static cooling and fixed freezer shelves with built-in evaporator coils to ensure an even temperature throughout the cabinet. The display freezer comes in white, with or without an illuminated canopy.



UFFS371G

Display Freezer

- Great product presentation
- Heated glass door
- Fixed freezing shelves
- LED interior light with switch
- Digital temperature display
- Defrost water drain
- Lock





UFFS371G L/H

Display Freezer, Left Hinged

- Left hinged glass door
- Great product presentation
- Heated glass door
- Fixed freezing shelves
- Internal LED light
- Digital temperature display
- Defrost water drain
- Adjustable feet



		UFFS371G	UFFS371G L/H	UFFS371GCP
Door No & Type		1 heated hinged glass door	1 heated hinged glass door	1 heated hinged glass door
Total Display Area	m²	0,74	0,74	0,74
Door Reversible		No	No	No
Shelves No & Type		6 fixed freezing shelves	6 fixed freezing shelves	6 fixed freezing shelves
Shelf Color		Chrome	Chrome	Chrome
Shelf Dimensions		470 x 413 mm	470 x 413 mm	470 x 413 mm
Max load on Shelves	kg/m²	110	110	110
Canopy Type				D-Shape
Temperature Range	°C	-24 to -14	-24 to -14	-24 to -14
Climate Class		4	4	4
Gross / Net Weight	kg	100 / 95	100 / 95	103 / 98
Gross / Net Volume	I	300 / 270	300 / 270	300 / 270
Feet / Legs		2 adjustable feet	2 adjustable feet	2 adjustable feet
Castors		2 rollers	2 rollers	2 rollers
Exterior Finish		White	White	White
Interior Finish		White	White	White
Interior Light		LED	LED	LED
Lock		Yes	Yes	Yes
Type of Controller		Mechanical	Mechanical	Mechanical
Type of Cooling		Static	Static	Static
Type of Defrost		Manual	Manual	Manual
Refrigerant		R290	R290	R290
Refrigerant Charge	g	85	85	85
Thermometer		Yes	Yes	Yes
Energy Class		С	С	С
Max Ambient		30°C at 55% RH	30°C at 55% RH	30°C at 55% RH
Energy Consumption	kWh/24h	8,27	8,27	8,32
Annual Energy Cons.	kWh/year	3017	3017	3035
Power Supply		13 Amp	13 Amp	
Input Power	W	570	570	570
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	40	40	40
Internal Dimension (WxDxH)	mm	470 x 440 x 1555	470 x 440 x 1555	470 x 440 x 1555
External Dimension (WxDxH)	mm	595 x 640 x 1840	595 x 640 x 1840	595 x 640 x 1980
Packed Dimension (WxDxH)	mm	680 x 710 x 1940	680 x 710 x 1940	680 x 710 x 2050
40ft Container Load	pcs	54	54	54

Speciality Freezers



UPD400-FRefrigerated Display Case (Freezing)

- Double glazed glass on four sides
- Frameless glass door
- Great product presentation
- Internal LED light
- Black steel exterior
- Mirror effect stainless steel interior
- Adjustable glass shelves
- Freezing unit









Adjustable glass shelves

Description

The UPD400-F glass display case offers an elegant solution for displaying desserts. The freezer has double glazed glass on all sides, including a frameless glass door. It has a modern design with a black steel exterior, a stainless steel interior, 5 adjustable glass shelves, and LED lighting.

UR90G-SUB ZERO

Caviar Cooler

- Internal vertical LED light
- Black interior and exterior
- Great product presentation
- Heated glass door
- Adjustable shelves
- Adjustable feet



GF200VSG

Glass Froster

- Ideal for frosting glasses (beer or shots)
- Mirror effect stainless steel interior
- Self-closing heated glass doors
- Ventilated cooling for fast pull-down and even temperature
- Adjustable shelves
- Adjustable feet
- LED interior light
- Heated self-closing glass door








		GF200VSG	UPD400-F	UR90G-SUB ZERO
Door No & Type		1 heated hinged glass door	1 hinged heated glass door	1 heated hinged glass doo
Shelves No & Type		3 wire shelves chrome	5 glass shelves + base	3 wire shelves black
Shelf Color		White	5 glass sticites - Base	Black
Shelf Dimensions		460 x 260 mm	530 x 417	420 x 300 mm
Total Display Area	m²		1.95	
Temperature Range	°C	-15 to -2	-22 to -18	-8 to +6
Climate Class		4	4	4
Gross / Net Weight	kg	52 / 45	225 / 203	39.5 / 35.5
Gross / Net Volume	I	112 / 79	364 / 248	92 / 81
Feet / Legs		4 adjustable feet		4 adjustable feet
Castors		•	4 wheels, 2 with brake	,
Exterior Finish		Stainless steel	Black / Glass	Black
Interior Finish		Stainless steel	Stainless steel / Glass	Black
Interior Light		LED Cold white	4 x Vertically LED	LED cold white vertically
Lock		No	Yes	Yes
Type of Controller		Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic, electric	Automatic	Automatic
Refrigerant		R290	R290	R600a
Refrigerant Charge	g	80	150	40
Thermometer		Yes	Yes	Yes
Energy Class			D	E
Energy Consumption	kWh/24h	2,5	23,51	1,51
Annual Energy Cons.	kWh/year	913	8582	551
Input Power	W	280	1000	280
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	42	42	42
Internal Dimension (WxDxH)	mm	485 x 395 x 676	588 x 516 x 1200	439 x 299 x 632
External Dimension (WxDxH)	mm	595 x 525 x 875	650 x 650 x 1950	515 x 542 x 750
Packed Dimension (WxDxH)	mm	630 x 575 x 930	720 x 720 x 2030	570 x 585 x 805
40ft Container Load	pcs	144	48	160
Door Reversible		No		No
Max load on Shelves	kg/m²		150	


EXTRA Multideck Freezers & MTF Mini



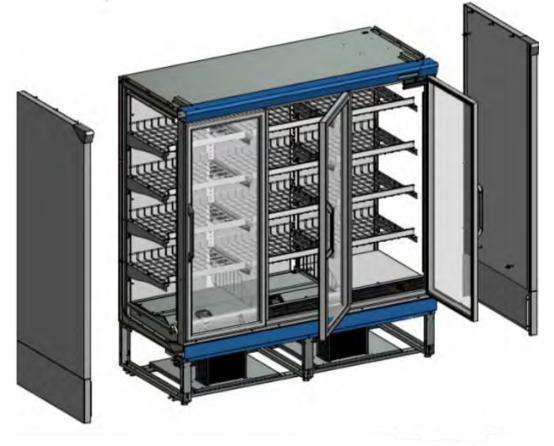

EXTRA1875FD


Supermarket Multideck Freezer



- Temperature Class 3L1
- · Heavy duty shelving with strengthening bar
- Adjustable extra deep shelves to maximise capacity
- Ticket strip and acrylic front riser as standard
- Internal vertical LED light
- Base plus 4 shelves
- Solid end walls as standard
- Multiplexing kit as accessory









Electronic thermostat

Description

The EXTRA range of multideck freezers features double glazed hinged glass doors for added energy efficiency. It has extra deep shelves for maximized storage capacity and as the shelves are adjustable and has a tilting function, it is easy to customize the freezer to fit your needs. The model allows for multiplexing and increases your possibilities to make the most of the space, you have available (multiplexing kit required).

EXTRA1250FD

Supermarket Multideck Freezer

- Can be multiplexed -Create uninterrupted continuous line
- Temperature Class 3L1
- Heavy duty shelving with strengthening bar
- Adjustable extra deep shelves to maximise capacity
- Internal vertical LED light
- Base plus 4 shelves
- Solid end walls as standard
- Multiplexing kit as accessory



MTF Mini

Wall Freezer

- Ideal for optimizing store space
- Heated self-closing glass doors
- LED illuminated canopy
- Great branding possibilities
- Ideal with chest cooler / freezer underneath
- Adjustable shelves
- Ticket strip and acrylic front riser as standard
- LED interior light with switch
- Requires stand building and cabinet lifting onto stand





		EXTRA1250FD	EXTRA1875FD	MTF Mini
Total Display Area	m²	1,53	2,72	0,38
Door No & Type		2 hinged glass doors	3 hinged glass doors	2 hinged self-closing glass doors
Door Reversible		No	No	
Shelves No & Type		8 wire shelves black	12 wire shelves black	4 adjustable wire shelves, white
Shelf Color		Black	Black	
Shelf Dimensions				530x316mm
Max load on Shelves	kg/m²	150	150	196
Canopy Type				Curved
Temperature Range	°C	-21 to -18	-21 to -18	-23 to -18
Climate Class		3	3	4
Gross / Net Weight	kg	350 / 330	490 / 440	170 / 113.5
Gross / Net Volume	1	880 / 850	1350 / 1270	200 / 170
Feet / Legs		4 adjustable feet	6 adjustable feet	Strong stand
Castors		Option	Option	
Exterior Finish		Black / Glass	Black / Glass	White
Interior Finish		Black	Black	White painted steel
Interior Light		2 x Vertically LED	2 x Vertically LED	LED
Lock		No	No	Yes
Type of Controller		Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Static
Type of Defrost		Automatic, hot gas	Automatic, hot gas	Manual
Refrigerant		R290	R290	R290
Refrigerant Charge	g	149	2x144	65
Thermometer		Yes	Yes	Yes
Energy Class		D	E	С
Max Ambient				30°C at 55% RH
Energy Consumption	kWh/24h	15,28	34,76	4,16
Annual Energy Cons.	kWh/year	5578	12687	1518
Input Power	W	1100	1860	212
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	53	53	58
Internal Dimension (WxDxH)	mm	1250 x 610 x 1399	1875 x 610 x 1399	1080 x 438 x 401
External Dimension (WxDxH)	mm	1350 x 930 x 2035	1975 x 930 x 2035	1275 x 636 x 1965
Packed Dimension (WxDxH)	mm	1450 x 975 x 2230	2075 x 975 x 2230	1380 x 675 x 1010
40ft Container Load	pcs	16	12	48

SSF Supermarket Freezers



SSF250

Supermarket Freezer

- Designed for Island installation
- Great product visibility
- · Sliding glass lids
- Static cooling
- Bumper bars
- · Adjustable legs







Baskets

Bumper bars

Description

The SSF range of supermarket freezers is an economic choice and offers great value for money. It is available in several sizes. The flat sliding lids are with tempered glass and allow for a nice overview of the frozen goods inside. The freezer includes baskets and bumper bars. Ideal for island installations.





SSF200

Supermarket Freezer


- Designed for Island installation
- Great product visibility
- Static cooling
- Bumper bars
- Adjustable legs
- Adjustable feet
- Sliding glass lids

SSF150

B A

Supermarket Freezer





- Sliding glass lids
- Static cooling
- Bumper barsAdjustable legs



		SSF150	SSF200	SSF250
Lid No & Type		2 flat sliding temp. glass lids	2 flat sliding temp. glass lids	4 flat sliding temp. glass lids
Total Display Area	m²	1,06	1,46	1,72
Basket No & Type		4 Wire baskets, white	6 Wire baskets, white	8 Wire baskets, white
Temperature Range	°C	-24 to -18	-24 to -18	-24 to -18
Climate Class		3	3	3
Gross / Net Weight	kg	200 / 125	160 / 105	200 / 125
Gross / Net Volume	I	597 / 459	839 / 652	1032 / 805
Feet / Legs		4 adjustable legs	4 adjustable legs	4 adjustable legs
Exterior Finish		White	White	White
Interior Finish		Powder coated steel	Powder coated steel	Powder coated steel
Interior Light		LED as option	LED as option	LED as option
Type of Controller		Electronic	Electronic	Electronic
Type of Cooling		Static	Static	Static
Type of Defrost		Manual	Manual	Manual
Refrigerant		R290	R290	R290
Refrigerant Charge	g	120	120	2 x 95
Thermometer		Yes	Yes	Yes
Energy Class		C	В	В
Energy Consumption	kWh/24h	3,9	4,5	4,9
Annual Energy Cons.	kWh/year	1423	1642	1788
Input Power	W	305	345	345
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	48	48	48
Internal Dimension (WxDxH)	mm	1375 x 790 x 575	1880 x 790 x 575	2280 x 790 x 575
External Dimension (WxDxH)	mm	1550 x 960 x 780	2050 x 960 x 780	2500 x 960 x 780
Packed Dimension (WxDxH)	mm	1640 x 1030 x 840	2140 x 1030 x 840	2590 x 1030 x 840
40ft Container Load	pcs	42	33	24

TWIN Supermarket Freezers



TWIN 220B-F

Black Supermarket Freezer

- Freezing unit
- Occupies less floor space
- Increased reliability
- Low energy consumption
- Save on total expenses (operation plus investment costs)
- Bumper bars
- Static cooling
- Automatic defrost
- 2 cooling systems for redundancy
- Ticket strips as accessory









Shelf as accessory

Description

The TWIN range of supermarket units features an innovative design, ideal for stores with limited space. One TWIN unit has the same volume as two standard chest freezers/coolers of the same length placed back-to-back. As the TWIN model takes up less floor space, the result is more storage with a smaller footprint. It also has the great function of two cooling systems for redundancy.



TWIN HEAD B-F

Black Supermarket Freezer

- Freezing unit
- Occupies less floor space
- Increased reliability
- Low energy consumption
- Save on total expenses (operation plus investment costs)
- Bumper bars
- Static cooling
- Automatic defrost
- 2 cooling systems for redundancy
- Ticket strips as accessory

TWIN HEAD-F

Supermarket Freezer



- Occupies less floor space
- Increased reliability
- Low energy consumption
- Save on total expenses (operation plus investment costs)
- Bumper bars
- Static cooling
- Automatic defrost
- 2 cooling systems for redundancy
- Ticket strips as accessory



• Ticket Strips as acc	.C3301 y	• ficket strips as accessory					
		TWIN 220A-F	TWIN 220B-F	TWIN 220-F	TWIN HEAD A-F	TWIN HEAD B-F	TWIN HEAD-F
Lid No & Type		2 curved sliding	2 curved sliding	2 curved sliding	2 curved sliding	2 curved sliding	2 curved sliding
Total Display Area	m²	2,65	2,65	2,65	0,65	0,65	0,65
Basket No & Type							
Number of dividers	pcs	4	4	4	3	3	3
Temperature Range	°C	-24 to -18	-24 to -18	-24 to -18	-24 to -18	-24 to -18	-24 to -18
Climate Class		3	3	3	3	3	3
Gross / Net Weight	kg	251 / 198	251 / 198	251 / 198	125 / 85	125 / 85	125 / 85
Gross / Net Volume	1	1697 / 1255	1697 / 1255	1697 / 1255	425 / 334	425 / 334	425 / 334
Feet / Legs		4 adjustable legs	4 adjustable legs	4 adjustable legs	4 adjustable legs	4 adjustable legs	4 adjustable legs
Exterior Finish		Anthracite RAL 7016	Black	White	Anthracite RAL 7016	Black	White
Interior Finish		Powder coated steel	Powder coated steel	Powder coated steel	Powder coated steel	Powder coated steel	Powder coated ste
Interior Light		LED	LED	LED	LED	LED	LED
Type of Controller		Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Type of Cooling		Static	Static	Static	Static	Static	Static
Type of Defrost		Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
Refrigerant		R290	R290	R290	R290	R290	R290
Refrigerant Charge	g	2 x 85	2 x 85	2 x 85	80	80	80
Thermometer		Yes	Yes	Yes	Yes	Yes	Yes
Energy Class		С	С	С	С	С	С
Energy Consumption	kWh/24h	9,2	9,2	9,2	4,1	4,1	4,1
Annual Energy Cons.	kWh/year	3358	3358	3358	1496	1496	1496
Input Power	W	522	522	552	267	267	267
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	48	48	48	46	46	46
Internal Dimension (WxDxH)	mm	2000 x 1175 x 700	2000 x 1175 x 700	2000 x 1175 x 700	1190 x 605 x 620	1190 x 605 x 620	1190 x 605 x 620
External Dimension (WxDxH)	mm	2150 x 1465 x 930	2150 x 1465 x 930	2150 x 1465 x 930	1470 x 812 x 915	1470 x 812 x 915	1470 x 812 x 915
Packed Dimension (WxDxH)	mm	2240 x 1550 x 1030	2240 x 1550 x 1030	2240 x 1550 x 1030	1530 x 1000 x 1050	1530 x 1000 x 1050	1530 x 1000 x 1050
40ft Container Load	pcs	14	14	14	30	30	30



FREEZERS Horizontal Freezers





FR605S SL

Ice Cream Freezer, Solid Lid

- Stainless steel lid
- Handle with lock
- Thermometer
- Powder coated white steel inner liner
- Defrost water drain
- Baskets
- Strong castors







Baskets

Thermometer

Description

The FR-SL range of horizontal freezers offers a reliable product at a competitive price. It comes in various sizes in white with a solid lid in white or stainless steel. It has a powder coated white steel inner liner and a defrost water drain for easy maintenance. It has strong castors for better mobility.





FR405S SL

Ice Cream Freezer, Solid Lid

- Stainless steel lid
- Handle with lock
- Thermometer
- Powder coated white steel inner liner
- Defrost water drain
- Baskets
- Strong castors

FR205S SL

Ice Cream Freezer, Solid Lid



- Stainless steel lid
- Handle with lock
- Thermometer
- Powder coated white steel inner liner
- Defrost water drain
- Basket
- Strong castors


0				O			
		CF700S SL	FR205S SL	FR305S SL	FR405S SL	FR505S SL	FR605S SL
Lid No & Type		1 hinged solid	1 hinged solid	1 hinged solid	1 hinged solid	1 hinged solid	1 hinged solid
Basket No & Type		3 Wire baskets, white	1 Wire basket, white	1 Wire basket, white	2 Wire baskets, white	2 Wire baskets, white	3 Wire baskets, white
Max No. of Baskets	pcs	8	2	3	5	6	7
Temperature Range	°C	-24 to -14	-24 to -14	-24 to -14	-24 to -14	-24 to -14	-24 to -14
Climate Class		4	4	4	4	4	4
Gross / Net Weight	kg	119 / 114	48 / 43	56 / 50	67 / 62	78 / 73	119 / 114
Gross / Net Volume	I	667 / 593	189 / 185	278 / 273	385 / 377	463 / 454	567 / 553
Castors		4 double castors	4 double castors	4 double castors	4 double castors	4 double castors	4 double castors
Exterior Finish		White	White	White	White	White	SS304
Interior Finish		White painted steel	White painted steel	White painted steel	White painted steel	White painted steel	White painted steel
Interior Light		No	No	No	No	Yes	Yes
Lock		Yes	Yes	Yes	Yes	Yes	Yes
Type of Controller		Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Type of Cooling		Static	Static	Static	Static	Static	Static
Type of Defrost		Manual	Manual	Manual	Manual	Manual	Manual
Refrigerant		R290	R600a	R600a	R600a	R600a	R600a
Refrigerant Charge	g	110	44	50	80	90	105
Thermometer		Yes	Yes	Yes	Yes	Yes	Yes
Energy Class		D	С	С	С	D	D
Energy Consumption	kWh/24h	3,28	1,29	1,58	1,93	3,13	3,61
Annual Energy Cons.	kWh/year	1198,66	470,85	577,43	703,72	1142,45	1317,6
Input Power	W	277	150	185	230	230	250
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	42	42	42	42	42	42
Internal Dimension (WxDxH)	mm	1935 x 510 x 685	610 x 480 x 725	860 x 480 x 725	1160 x 480 x 725	1380 x 480 x 725	1680 x 480 x 725
External Dimension (WxDxH)	mm	2060 x 716 x 903	734 x 700 x 945	984 x 700 x 945	1284 x 700 x 945	1504 x 700 x 945	1804 x 680 x 945
Packed Dimension (WxDxH)	mm	2150 x 750 x 990	770 x 710 x 1050	1020 x 710 x 1050	1370 x 710 x 1050	1540 x 710 x 1050	1880 x 710 x 1050
40ft Container Load	pcs	32	88	66	50	44	38

FREEZERS Horizontal Freezers





FR605 SL Ice Cream Freezer, Solid Lid



- Thermometer
- Powder coated white steel inner liner
- Defrost water drain
- Baskets
- Strong castors







Baskets

Thermometer

Description

The FR-SL range of horizontal freezers offers a reliable product at a competitive price. It comes in various sizes in white with a solid lid in white or stainless steel. It has a powder coated white steel inner liner and a defrost water drain for easy maintenance. It has strong castors for better mobility.





FR505 SL

Ice Cream Freezer, Solid Lid

- Handle with lock
- Thermometer
- Powder coated white steel inner liner
- Defrost water drain
- Baskets
- Strong castors

FR305 SL

D A

Ice Cream Freezer, Solid Lid



- Handle with lock
- Thermometer
- Powder coated white steel inner liner
- Defrost water drain
- Basket
- Strong castors

		CF700 SL	FR205 SL	FR305 SL	FR405 SL	FR505 SL	FR605 SL
1: IN 0 T							
Lid No & Type		1 hinged solid lid	1 hinged solid lid	1 hinged solid lid	1 hinged solid lid	1 hinged solid lid	1 hinged solid lid
Basket No & Type		3 Wire baskets, white	1 Wire basket, white	1 Wire basket, white	2 Wire baskets, white	2 Wire baskets, white	3 Wire baskets, whit
Max No. of Baskets	pcs	8	2	3	5	6	7
Temperature Range	°C	-24 to -14	-24 to -14	-24 to -14	-24 to -14	-24 to -14	-24 to -14
Climate Class		4	4	4	4	4	4
Gross / Net Weight	kg	119 / 114	48 / 43	56 / 50	67 / 62	78 / 73	119 / 114
Gross / Net Volume	l	667 / 593	189 / 185	278 / 273	385 / 377	463 / 454	567 / 553
Castors		4 double castors	4 double castors	4 double castors	4 double castors	4 double castors	4 double castors
Exterior Finish		White	White	White	White	White	White
Interior Finish		White painted steel	White painted steel	White painted steel	White painted steel	White painted steel	White painted steel
Interior Light		No	No	No	Yes	Yes	Yes
Lock		Yes	Yes	Yes	Yes	Yes	Yes
Type of Controller		Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Type of Cooling		Static	Static	Static	Static	Static	Static
Type of Defrost		Manual	Manual	Manual	Manual	Manual	Manual
Refrigerant		R290	R600a	R600a	R600a	R600a	R600a
Refrigerant Charge	g	110	44	50	80	90	105
Thermometer		Yes	Yes	Yes	Yes	Yes	Yes
Energy Class		D	С	С	С	D	D
Max Ambient		30°C at 55% RH	30°C at 55% RH	30°C at 55% RH	30°C at 55% RH	30°C at 55% RH	30°C at 55% RH
Energy Consumption	kWh/24h	3,28	1,29	1,58	1,93	3,13	3,61
Annual Energy Cons.	kWh/year	1199	470,85	577,43	703,72	1142,45	1317,6
Power Supply		13 Amp	13 Amp	13 Amp	13 Amp	13 Amp	13 Amp
Input Power	W	277	150	185	230	230	250
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	42	42	42	42	42	42
nternal Dimension (WxDxH)	mm	1935 x 510 x 685	610 x 480 x 725	860 x 480 x 725	1160 x 480 x 725	1380 x 480 x 725	1680 x 480 x 725
External Dimension (WxDxH)	mm	2060 x 716 x 903	734 x 700 x 945	984 x 700 x 945	1284 x 700 x 945	1504 x 700 x 945	1804 x 700 x 945
Packed Dimension (WxDxH)	mm	2150 x 750 x 990	770 x 710 x 1050	1020 x 710 x 1050	1370 x 710 x 1050	1540 x 710 x 1050	1880 x 710 x 1050
40ft Container Load	pcs	32	88	66	50	44	38

FREEZERS Medical Freezers







SE40-45

Medical Freezer

- Electronic thermostat with alarm
- Strong steel inner liner
- Solid lid
- Castors with brake
- 1 wire basket, white







Strong handle

Electronic thermostat


Description

The SE range is a range of low temperature horizontal freezers, operating from -45 to -5 degrees. They are fitted with an electronic thermostat with an alarm, and are ideal for such purposes as laboratories or optimal freezing of fish.





Medical Freezer




- Strong steel inner liner
- Solid lid
- Castors with brake
- 1 wire basket, white





Medical Freezer





- Solid lid
- Castors with brake
- 1 wire basket, white





		SE10-45	SE20-45	SE30-45	SE40-45
Lid No & Type		1 hinged solid lid			
Basket No & Type		1 Wire basket, white			
Max No. of Baskets	pcs	2	3	5	6
Temperature Range	°C	-45 to -5	-45 to -5	-45 to -5	-45 to -5
Climate Class		3	3	3	3
Gross / Net Weight	kg	54 / 49	62 / 57	76 / 71	83 / 78
Gross / Net Volume	1	155 / 152	235 / 230	330 / 323	400 / 392
Castors		4 wheels, 2 with brake			
Exterior Finish		White	White	White	White
Interior Finish		Powder coated steel	Powder coated steel	Powder coated steel	Powder coated steel
Lock		Yes	Yes	Yes	Yes
Type of Controller		Electronic	Electronic	Electronic	Electronic
Type of Cooling		Static	Static	Static	Static
Type of Defrost		Manual	Manual	Manual	Manual
Refrigerant		R290	R290	R290	R290
Refrigerant Charge	g	40	55	61	70
Thermometer		Yes	Yes	Yes	Yes
Energy Consumption	kWh/24h	3,45	3,55	5,15	5,52
Annual Energy Cons.	kWh/year	1259	1296	1880	2015
Input Power	W	250	300	500	600
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	45	45	45	45
Internal Dimension (WxDxH)	mm	570 x 440 x 705	820 x 440 x 705	1120 x 440 x 705	1340 x 440 x 705
External Dimension (WxDxH)	mm	734 x 705 x 945	984 x 705 x 945	1284 x 705 x 945	1504 x 705 x 945
Packed Dimension (WxDxH)	mm	850 x 710 x 1000	1050 x 710 x 990	1350 x 710 x 990	1580 x 710 x 1050
40ft Container Load	pcs	102	70	50	44

4 FREEZERS Medical Cabinets









Thermostat with audible and external alarm



Evaporator cover preventing damaged medicine

MSU400

Medical Cooler

- · Hinged glass door
- Electronic thermostat
- Audible alarm signal
- External alarm connection
- · Adjustable shelves
- Automatic defrost
- Adjustable feet
- Fan assisted cooling
- LED interior light



Description

The MSU range of medical coolers features an electronic thermostat with an audible alarm signal as well as an external alarm connection for added security. The glass door gives a good overview of the content, while fan assisted cooling ensures an even temperature in the cabinet. The cooler comes with an evaporator cover to prevent damaged medicine. Available in two sizes. Be aware that this range is not DIN13277 approved.




DID YOU KNOW?

All TEFCOLD products undergo strict quality control to ensure reliability, efficiency, and to comply with regulations.

MSU300

Medical Cooler



- Electronic thermostat
- Liectionic thermosta
- Audible alarm signalExternal alarm connection
- Adjustable shelves
- Automatic defrost
- Adjustable feet
- Fan assisted cooling
- LED interior light



		MSU300	MSU400
Door No & Type		1 hinged glass door	1 hinged glass door
Door Reversible		Yes	Yes
Shelves No & Type		4 wire shelves white	5 wire shelves white
Shelf Color		White	White
Shelf Dimensions		498 x 405 mm	498 x 405 mm
Max load on Shelves	kg/m²	196	196
Temperature Range	°C	+2 to +10	+2 to +10
Climate Class		4	4
Gross / Net Weight	kg	78 / 73	81 / 74
Gross / Net Volume	1	290 / 260	372 / 347
Feet / Legs		2 adjustable feet	2 adjustable feet
Castors		2 rollers	2 rollers
Exterior Finish		White	White
Interior Finish		ABS	ABS
Interior Light		LED	LED
Lock		Yes	Yes
Type of Controller		Electronic with alarm	Electronic with alarm
Type of Cooling		Fan assisted	Fan assisted
Type of Defrost		Automatic	Automatic
Refrigerant		R600a	R600a
Refrigerant Charge	g	80	80
Thermometer		Yes	Yes
Energy Class		D	D
Energy Consumption	kWh/24h	2	2,1
Annual Energy Cons.	kWh/year	730	767
Input Power	W	266	295
Voltage / Frequency	V/Hz	220-240/50	220-240/50
Noise Level	dB(A)	45	45
Internal Dimension (WxDxH)	mm	470 x 440 x 1347	470 x 440 x 1555
External Dimension (WxDxH)	mm	595 x 640 x 1635	595 x 640 x 1840
Packed Dimension (WxDxH)	mm	680 x 710 x 1740	680 x 710 x 1940
40ft Container Load	pcs	54	54

4 FREEZERS

Upright Freezers







Strong handle



UFFS371SD

Storage Freezer

- Digital thermometer
- Fixed freezing shelves
- Defrost water drain
- Adjustable feet
- Static cooling
- Reversible solid door



Description

The UFFS-SD range of storage freezers offers great storage space at a competitive price. It has static cooling and fixed freezer shelves with built-in evaporator coils to ensure an even temperature throughout the cabinet. The solid door is reversible and the freezer comes with a digital thermometer.



UFSC371SD

Storage Freezer

- Digital thermometer
- Fixed shelves
- Defrost water drain
- Adjustable feet
- Static cooling



		UFFS371SD	UFSC371SD
Dear No. 9. Tune			
Door No & Type Door Reversible		1 hinged solid door	1 hinged solid door
		Yes	Yes
Shelves No & Type		6 fixed freezing shelves	6 fixed freezing shelves
Shelf Color		Chrome	Chrome
Shelf Dimensions		470 x 413 mm	470 x 413 mm
Max load on Shelves	kg/m²	110	110
Temperature Range	°C	-24 to -14	-24 to -14
Climate Class		4	4
Gross / Net Weight	kg	100 / 95	100 / 95
Gross / Net Volume	I	300 / 270	300 / 270
Feet / Legs		2 adjustable feet	2 adjustable feet
Castors		2 rollers	2 rollers
Exterior Finish		White	White
Interior Finish		White	White
Interior Light		No	No
Lock		Yes	Yes
Type of Controller		Mechanical	Mechanical
Type of Cooling		Static	Static
Type of Defrost		Manual	Manual
Refrigerant		R290	R290
Refrigerant Charge	g	85	85
Thermometer		Yes	Yes
Energy Class		В	В
Energy Consumption	kWh/24h	2,16	2,16
Annual Energy Cons.	kWh/year	789	789
Input Power	W	270	270
Voltage / Frequency	V/Hz	220-240/50	220-240/50
Noise Level	dB(A)	40	45
Internal Dimension (WxDxH)	mm	475 x 440 x 1550	470 x 440 x 1545
External Dimension (WxDxH)	mm	595 x 600 x 1840	595 x 640 x 1840
Packed Dimension (WxDxH)	mm	660 x 680 x 2000	680 x 710 x 2000
40ft Container Load	pcs	54	54
TOTA COTTAINED LOAD	pcs	JT	J**

4 FREEZERS

Upright Storage Freezers







We offer matching coolers for most of our storage freezers. For example, the UF-models match the popular UR-Coolers.





Ventilated cooling



Adjustable shelves

UF400V

Storage Freezer

- Integrated handle
- · Reversible solid door
- · Electronic thermostat
- Automatic defrost
- Adjustable shelves
- Ventilated cooling
- Lock
- Adjustable feet with rollers to rear



Description

The UF-V range of storage freezers comes in various sizes. The freezer has an effective ventilated refrigeration system, which ensures an even temperature throughout the cabinet. Set the temperature on the easy-to-use digital thermostat display. You can customize the freezer to fit your needs with adjustable shelves. Defrost happens automatically.

UF200

Storage Freezer

- Integrated handle
- Reversible solid door
- Electronic thermostat
- Fixed freezing shelves
- Adjustable feet with rollers to rear







UF200V

Storage Freezer

- New design
- Integrated handle
- Reversible solid door
- Electronic thermostat
- Automatic defrost
- Adjustable shelves
- Ventilated cooling
- Lock



		UF200	UF200V	UF400	UF400V
Door No & Type		1 hinged solid door	1 hinged solid door	1 hinged solid door	1 hinged solid door
Door Reversible		Yes	Yes	Yes	Yes
Shelves No & Type		2 fixed freezing shelves	3 wire shelves white	6 fixed freezing shelves	4 wire shelves white
Shelf Color		White	White	White	White
Shelf Dimensions		490 x 380 mm	490 x 380 mm	490 x 420 mm	490 x 420 mm
Max load on Shelves	kg/m²	110	110	110	110
Temperature Range	°C	-24 to -10	-24 to -10	-24 to -10	-24 to -10
Climate Class		4	4	4	4
Gross / Net Weight	kg	52 / 47	52 / 47	85 / 80	85 / 80
Gross / Net Volume	I	200 / 120	200 / 120	400 / 340	400 / 340
Feet / Legs		4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Castors		2 rollers	2 rollers	2 rollers	2 rollers
Exterior Finish		White	White	White	White
Interior Finish		White ABS	White ABS	White ABS	White ABS
Interior Light		No	No	No	No
Lock		Yes	Yes	Yes	Yes
Type of Controller		Electronic	Electronic	Electronic	Electronic
Type of Cooling		Static	Ventilated	Static	Ventilated
Type of Defrost		Manual	Automatic	Manual	Automatic
Refrigerant		R600a	R290	R600a	R290
Refrigerant Charge	g	60	45	90	80
Thermometer		Yes	Yes	Yes	Yes
Energy Class			A		D
Max Ambient		30°C at 55% RH	30°C at 55% RH	30°C at 55% RH	30°C at 55% RH
Energy Consumption	kWh/24h	1,2	1,62	2,3	5,48
Annual Energy Cons.	kWh/year	438	592	840	2000
Power Supply		13 Amp	13 Amp	13 Amp	13 Amp
Input Power	W	105	180	150	300
Voltage / Frequency	V/Hz		220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	40	42	40	40
Internal Dimension (WxDxH)	mm	484 x 470 x 620	484 x 470 x 610	484 x 470 x 1620	484 x 470 x 1620
External Dimension (WxDxH)	mm	600 x 585 x 855	600 x 600 x 850	600 x 585 x 1855	600 x 585 x 1855
Packed Dimension (WxDxH)	mm	690 x 650 x 910	690 x 650 x 910	690 x 650 x 2050	690 x 650 x 2050
40ft Container Load	pcs	108	108	54	54

Upright Stainless Steel Storage Freezers









Ventilated cooling



Lock

UF400VS

Storage Freezer

- Stainless steel cabinet
- Integrated handle
- Reversible solid door
- Electronic thermostat
- Automatic defrost
- Adjustable shelves
- Ventilated cooling
- Lock
- Adjustable feet with rollers to rear



Description

The UF-VS range of freezers is the ventilated version of our stainless steel storage freezers. It comes in various sizes. The freezer has an effective ventilated refrigeration system, which ensures an even temperature throughout the cabinet. Set the temperature on the easy-to-use digital thermostat display. You can customize the freezer to fit your needs with adjustable shelves. Defrost happens automatically.

UF200S

Storage Freezer

- Stainless steel cabinet
- Integrated handle
- Reversible solid door
- Electronic thermostat
- Fixed freezing shelves
- Lock
- Adjustable feet with rollers to rear

(**X**



UF200VS

Storage Freezer

- New design
- Stainless steel cabinet
- Integrated handle
- Reversible solid door
- Electronic thermostat
- Automatic defrost
- Adjustable shelves
- Ventilated cooling
- Lock





		UF200S	UF200VS	UF400S	UF400VS	UF550S	UF600SS
Door No & Type		1 hinged solid door	1 hinged solid door	1 hinged solid door	1 hinged solid door	1 hinged solid door	1 hinged solid doo
Door Reversible		Yes	Yes	Yes	Yes	Yes	Yes
Shelves No & Type		2 fixed freezing shelves	3 wire shelves white	6 fixed freezing shelves	4 wire shelves white	6 fixed freezing shelves	3 adjustable
Shelf Color		White	White	White	White		Grey
Shelf Dimensions		490 x 380 mm	490 x 380 mm	490 x 420 mm	490 x 420 mm	GN2/1	GN2/1
Max load on Shelves	kg/m²	110	110	110	110	110	196
Temperature Range	°C	-24 to -10	-24 to -10	-24 to -10	-24 to -10	-24 to -10	-22 to -18
Climate Class		4	4	4	4	4	4
Gross / Net Weight	kg	52 / 47	52 / 47	85 / 80	85 / 80	101 / 94	101 / 94
Gross / Net Volume	1	200 / 120	200 / 120	400 / 340	400 / 340	461 / 420	620 / 518
Feet / Legs		4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet	2 adjustable feet	2 adjustable feet
Castors		2 rollers	2 rollers	2 rollers	2 rollers	2 rollers	2 rollers
Exterior Finish		SS430	SS430	SS430	SS430	SS430	SS430
Interior Finish		White ABS	White ABS	White ABS	White ABS	White ABS	SS304
Interior Light		No	No	No	No	No	No
Lock		Yes	Yes	Yes	Yes	Yes	Yes
Type of Controller		Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Type of Cooling		Static	Ventilated	Static	Ventilated	Static	Ventilated
Type of Defrost		Manual	Automatic	Manual	Automatic	Manual	Automatic, electric
Refrigerant		R600a	R290	R600a	R290	R600a	R290
Refrigerant Charge	g	60	45	90	80	130	120
Thermometer		Yes	Yes	Yes	Yes	Yes	Yes
Energy Class			A		D		С
Max Ambient		30°C at 55% RH	30°C at 55% RH	30°C at 55% RH	30°C at 55% RH	30°C at 55% RH	30°C at 55% RH
Energy Consumption	kWh/24h	1,2	1,62	2,3	5,48	2,24	4,05
Annual Energy Cons.	kWh/year	438	592	840	2000	818	1478
Power Supply		13 Amp	13 Amp	13 Amp	13 Amp	13 Amp	
Input Power	W	105	180	150	300	190	270
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50		220-240/50
Noise Level	dB(A)	40	42	40	40	45	45
Internal Dimension (WxDxH)	mm	484 x 470 x 620	484 x 470 x 610	484 x 470 x 1620	484 x 470 x 1620	667 x 570 x 1485	657 x 580 x 1660
External Dimension (WxDxH)	mm	600 x 585 x 855	600 x 600 x 850	600 x 585 x 1855	600 x 585 x 1855	777 x 715 x 1720	777 x 745 x 1895
Packed Dimension (WxDxH)	mm	690 x 650 x 910	690 x 650 x 910	690 x 650 x 2050	690 x 650 x 2050	850 x 770 x 1900	840 x 760 x 2100
40ft Container Load	pcs	108	108	54	54	42	42





ICE Scoop Ice Cream Freezers



ICE2

Scoop Ice Cream Freezer

- Countertop model
- Angled display for better presentation
- Suitable for Napoli Pans (not included)
- Ideal for buffets
- Easy access to products
- · Flat hinged glass lid
- Static cooling
- · Adjustable feet
- · Optional popsicle tray





Popsicle tray available upon request



Stand available upon request

Description

The ICE range is perfect for businesses with limited space, yet aiming to maximize their scooping ice cream sales. The ICE is designed for convenient countertop placement and is available in either a 2 or 3 napoli pan configuration. It can be used both front or back-of-house settings, allowing for speedy and efficient service of popular ice cream flavors.



ICE3

Scoop Ice Cream Freezer

- Countertop model
- Angled display for better presentation
- Suitable for Napoli Pans (not included)
- Ideal for buffets
- Easy access to products
- Flat hinged glass lid
- Static cooling
- Adjustable feet
- Optional popsicle tray



		ICE2	ICE3
Serving Capacity		2 Napoli Pans (5 L)	3 Napoli Pans (5 L)
Storage Capacity (under)		No under storage	No under storage
Total Display Area	m²	0,12	0,18
Temperature Range	°C	-22 to -10	-22 to -10
Climate Class		4	4
Gross / Net Weight	kg	30 / 26	36 / 32
Gross / Net Volume	1	28 / 20	35 / 29
Exterior Finish		White	White
Interior Finish		Stainless Steel	Stainless Steel
Type of Controller		Mechanical	Mechanical
Type of Cooling		Static	Static
Type of Defrost		Manual	Manual
Refrigerant		R600a	R600a
Refrigerant Charge	g	22	25
Thermometer		Yes	Yes
Energy Class		В	A
Energy Consumption	kWh/24h	2,87	2,88
Annual Energy Cons.	kWh/year	1049	1051
Input Power	W	90	90
Voltage / Frequency	V/Hz	220-240/50	220-240/50
Internal Dimension (WxDxH)	mm	364 x 389 x 173	529 x 389 x 173
External Dimension (WxDxH)	mm	490 x 790 x 345	654 x 790 x 345
Packed Dimension (WxDxH)	mm	590 x 890 x 375	755 x 890 x 375
40ft Container Load	pcs	150	150

IC-SC Ice Cream Freezers





IC301SC

Ice Cream Freezer

- Includes full set of baskets
- Flat sliding glass lids with lock
- Great branding possibilities
- Digital thermometer
- Powder coated white steel inner liner
- Castors with brake
- Climate class 5 for high performance in warm surroundings







Baskets

Lock

Description

The IC standard range of ice cream freezers offers a stable and solid-built unit at a competitive price. It is a great option for start-up companies, season sale etc. It comes with flat glass sliding lids for product visibility and a full set of baskets, ready to be filled with delicious ice cream and lollies. Sturdy heavy duty castors are fitted to enable easy movement of the unit.





IC201SC



- Flat sliding glass lids with lock
- Includes full set of baskets
- Great branding possibilities
- Digital thermometer
- Castors with brake
- Climate class 5 for high performance in warm surroundings

IC101SC

Ice Cream Freezer



- Flat sliding glass lids with lock
- Great branding possibilities
- Digital thermometer
- Castors with brake
- 2 wire baskets, white
- Climate class 5 for high performance in warm surroundings

3di i Odi idi i ig3			3di i ddi iding3	
		IC101SC	IC201SC	IC301SC
Lid No & Type		2 flat sliding temp. glass lids	2 flat sliding temp. glass lids	2 flat sliding temp. glass lids
Basket No & Type		2 Wire baskets, white	2 Wire baskets, white	4 Wire baskets, white
Max No. of Baskets	pcs	2	2	4
Temperature Range	°C	-24 to -14	-24 to -14	-24 to -14
Climate Class		5	5	5
Gross / Net Weight	kg	47 / 42	54 / 46	65 / 55
Gross / Net Volume	I	108 / 91	191 / 165	296 / 255
Castors		4 double castors	4 wheels, 2 with brake	4 wheels, 2 with brake
Exterior Finish		White	White	White
Interior Finish		White painted steel	White painted steel	White painted steel
Lock		Yes	Yes	Yes
Type of Controller		Mechanical	Mechanical	Mechanical
Type of Cooling		Static	Static	Static
Type of Defrost		Manual	Manual	Manual
Refrigerant		R600a	R600a	R290
Refrigerant Charge	g	60	55	85
Thermometer		Yes	Yes	Yes
Energy Class		D	D	D
Energy Consumption	kWh/24h	1,21	1,46	1,78
Annual Energy Cons.	kWh/year	443	534	648
Input Power	W	80	98	141
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	45	45	45
Internal Dimension (WxDxH)	mm	450 x 450 x 520	600 x 510 x 655	890 x 510 x 655
External Dimension (WxDxH)	mm	570 x 570 x 897	720 x 630 x 892	1010 x 630 x 892
Packed Dimension (WxDxH)	mm	680 x 700 x 950	800 x 750 x 940	1100 x 750 x 940
40ft Container Load	pcs	108	92	64


IC-SC Ice Cream Freezers





IC701SC

Ice Cream Freezer



- Includes full set of baskets
- Great branding possibilities
- Digital thermometer
- Castors with brake
- Climate class 5 for high performance in warm surroundings







Baskets

Lock

Description

The IC standard range of ice cream freezers offers a stable and solid-built unit at a competitive price. It is a great option for start-up companies, season sale etc. It comes with flat glass sliding lids for product visibility and a full set of baskets, ready to be filled with delicious ice cream and lollies. Sturdy heavy duty castors are fitted to enable easy movement of the unit.





IC401SC

Ice Cream Freezer



- Flat sliding glass lids with lock
- Great branding possibilities
- Includes full set of baskets
- Digital thermometer
- Castors with brake
- Climate class 5 for high performance in warm surroundings

IC501SC





- Includes full set of baskets
- Flat sliding glass lids with lock
- Great branding possibilities
- Digital thermometer
- Castors with brake
- Climate class 5 for high performance in warm surroundings

Ö				0	
		IC401SC	IC501SC	IC551SC	IC701SC
Lid No & Type		2 flat sliding temp. glass lids			
Basket No & Type		5 Wire baskets, white	6 Wire baskets, white	7 Wire baskets, white	8 Wire baskets, white
Max No. of Baskets	pcs	5	6	7	8
Temperature Range	°C	-24 to -14	-24 to -14	-24 to -14	-24 to -14
Climate Class		5	5	5	5
Gross / Net Weight	kg	74 / 64	90 / 72	114 / 96	115 / 100
Gross / Net Volume	1	401 / 350	491 / 430	555 / 486	670 / 620
Castors		4 wheels, 2 with brake			
Exterior Finish		White	White	White	White
Interior Finish		White painted steel	White painted steel	White painted steel	White painted steel
Lock		Yes	Yes	Yes	Yes
Type of Controller		Mechanical	Mechanical	Mechanical	Mechanical
Type of Cooling		Static	Static	Static	Static
Type of Defrost		Manual	Manual	Manual	Manual
Refrigerant		R290	R290	R290	R290
Refrigerant Charge	g	105	110	120	90
Thermometer		Yes	Yes	Yes	Yes
Energy Class		D	D	D	D
Energy Consumption	kWh/24h	2,35	2,73	3,07	3,56
Annual Energy Cons.	kWh/year	857	997	1122	1299
Input Power	W	141	191	273	292
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	45	45	45	45
Internal Dimension (WxDxH)	mm	1180 x 510 x 655	1430 x 510 x 655	1630 x 510 x 655	1930 x 510 x 655
External Dimension (WxDxH)	mm	1300 x 630 x 892	1550 x 630 x 892	1750 x 630 x 892	2055 x 630 x 892
Packed Dimension (WxDxH)	mm	1400 x 750 x 940	1640 x 750 x 940	1850 x 750 x 940	2100 x 750 x 940
40ft Container Load	pcs	50	42	38	32

IC-SCEB Ice Cream Freezers





IC301SCEB

Ice Cream Freezer

- Angled display for better presentation
- Curved sliding lids with lock
- · Includes full set of baskets
- Ideal for branding
- Digital thermometer
- Castors with brake
- Climate class 5 for high performance in warm surroundings







Baskets

Lock


Description

The IC-SCEB standard range of ice cream freezers offers a stable and solid-built unit at a competitive price. It is a great option for start-up companies, season sale etc. It comes with curved glass sliding lids for product visibility and a full set of baskets, ready to be filled with delicious ice cream and lollies. Sturdy heavy duty castors are fitted to enable easy movement of the unit.



IC101SCEB LED

Ice Cream Freezer



- Curved sliding lids with lock
- Digital thermometer
- Castors with brake
- 2 wire baskets, white
- Climate class 5 for high performance in warm surroundings



IC201SCEB

D A G

Ice Cream Freezer



- Angled display for better presentation
- Curved sliding lids with lock
- 2 wire baskets, white
- Ideal for branding
- Digital thermometer
- · Castors with brake
- Climate class 5 for high performance in warm surroundings

			Surroundings	
		IC101SCEB LED	IC201SCEB	IC301SCEB
Lid No & Type		2 curved sliding temp. glass lids	2 curved sliding temp. glass lids	2 curved sliding temp. glass lids
Basket No & Type		2 Wire baskets, white	2 Wire baskets, white	4 Wire baskets, white
Max No. of Baskets	pcs	2	2	4
Temperature Range	°C	-24 to -14	-24 to -14	-24 to -14
Climate Class		5	5	5
Gross / Net Weight	kg	40 / 37	58 / 53	65 / 57
Gross / Net Volume	1	100 / 85	176 / 157	264 / 230
Castors		4 double castors	4 wheels, 2 with brake	4 wheels, 2 with brake
Exterior Finish		White	White	White
Interior Finish		White painted steel	White painted steel	White painted steel
Interior Light		Yes	No	No
Lock		Yes	Yes	Yes
Type of Controller		Mechanical	Mechanical	Mechanical
Type of Cooling		Static	Static	Static
Type of Defrost		Manual	Manual	Manual
Refrigerant		R600a	R600a	R290
Refrigerant Charge	g	60	55	85
Thermometer		Yes	Yes	Yes
Energy Class		D	D	D
Energy Consumption	kWh/24h	1,29	1,51	2,08
Annual Energy Cons.	kWh/year	470	552	758
Input Power	W	80	98	141
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	45	45	45
Internal Dimension (WxDxH)	mm	450 x 450 x 490	600 x 495 x 710	890 x 495 x 710
External Dimension (WxDxH)	mm	570 x 570 x 885	720 x 615 x 949	1010 x 615 x 949
Packed Dimension (WxDxH)	mm	680 x 700 x 1010	800 x 750 x 1010	1100 x 750 x 1010
40ft Container Load	pcs	108	92	64

IC-SCEB Ice Cream Freezers





IC551SCEB

Ice Cream Freezer

- Angled display for better presentation
- Curved sliding lids with lock
- · Includes full set of baskets
- Ideal for branding
- Digital thermometer
- Castors with brake
- Climate class 5 for high performance in warm surroundings







Baskets

Lock

Description

The IC-SCEB standard range of ice cream freezers offers a stable and solid-built unit at a competitive price. It is a great option for start-up companies, season sale etc. It comes with curved glass sliding lids for product visibility and a full set of baskets, ready to be filled with delicious ice cream and lollies. Sturdy heavy duty castors are fitted to enable easy movement of the unit.





Ice Cream Freezer

- Angled display for better presentation
- Curved sliding lids with lock
- Includes full set of baskets
- Ideal for branding
- Digital thermometer
- Castors with brake
- Climate class 5 for high performance in warm surroundings



IC401SCEB

D A

Ice Cream Freezer



- Angled display for better presentation
- Curved sliding lids with lock
- Includes full set of baskets
- Ideal for branding
- Digital thermometer
- · Castors with brake
- Climate class 5 for high performance in warm surroundings

O			· ·	
		IC401SCEB	IC501SCEB	IC551SCEB
Lid No & Type		2 curved sliding temp. glass lids	2 curved sliding temp. glass lids	2 curved sliding temp. glass lids
Basket No & Type		5 Wire baskets, white	6 Wire baskets, white	7 Wire baskets, white
Max No. of Baskets	pcs	5	6	7
Temperature Range	°C	-24 to -14	-24 to -14	-24 to -14
Climate Class		5	5	5
Gross / Net Weight	kg	76 / 66	85 / 72	114 / 96
Gross / Net Volume	1	352 / 325	427 / 398	540 / 481
Castors		4 wheels, 2 with brake	4 wheels, 2 with brake	4 wheels, 2 with brake
Exterior Finish		White	White	White
Interior Finish		White painted steel	White painted steel	White painted steel
Lock		Yes	Yes	Yes
Type of Controller		Mechanical	Mechanical	Mechanical
Type of Cooling		Static	Static	Static
Type of Defrost		Manual	Manual	Manual
Refrigerant		R290	R290	R290
Refrigerant Charge	g	105	110	120
Thermometer		Yes	Yes	Yes
Energy Class		D	D	D
Energy Consumption	kWh/24h	2,19	2,55	2,85
Annual Energy Cons.	kWh/year	799	929	1039
Input Power	W	141	191	292
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	45	45	45
Internal Dimension (WxDxH)	mm	1180 x 495 x 710	1420 x 495 x 710	1630 x 495 x 710
External Dimension (WxDxH)	mm	1300 x 615 x 949	1550 x 615 x 949	1750 x 615 x 949
Packed Dimension (WxDxH)	mm	1400 x 750 x 1010	1640 x 750 x 1010	1840 x 750 x 1010
40ft Container Load	pcs	50	42	38

ICE CREAM FREEZERS NIC-SC Ice Cream Freezers





NIC501SC

Ice Cream Freezer

- Includes full set of baskets
- Flat sliding glass lids with lock
- Digital thermometer
- Castors with brake
- Climate class 5 for high performance in warm surroundings







White coated steel inner liner

Digital thermometer

Description

The NIC-SC premium range of ice cream freezers has a great design with curved corners, rounded edges, and flat sliding glass lids. It is a very stable and solid build, but at the same time on wheels so that it is easy to change location in the store. The freezer is great for displaying frozen food including ice cream and lollies. It comes with a full set of baskets.





NIC301SC

Ice Cream Freezer

- Includes full set of baskets
- Flat sliding glass lids with lock
- Great branding possibilities
- Digital thermometer
- Castors with brake
- Climate class 5 for high performance in warm surroundings

NIC201SC

Ice Cream Freezer



- Flat sliding glass lids with lock
- Includes full set of baskets
- Great branding possibilities
- Digital thermometer
- Powder coated white steel inner liner
- Castors with brake
- Climate class 5 for high performance in warm surroundings

	3317-3317-3317-3317-3317-3317-3317-3317				
		NIC201SC	NIC301SC	NIC401SC	NIC501SC
Lid No & Type		2 flat sliding temp. glass lids			
Basket No & Type		2 Wire baskets, white	4 Wire baskets, white	5 Wire baskets, white	6 Wire baskets, white
Max No. of Baskets	pcs	2	4	5	6
Temperature Range	°C	-24 to -14	-24 to -14	-24 to -14	-24 to -14
Climate Class		5	5	5	5
Gross / Net Weight	kg	63 / 52	70 / 62	87 / 72	122 / 110
Gross / Net Volume	1	186 / 138	288 / 218	390 / 298	478 / 367
Castors		4 wheels, 2 with brake			
Exterior Finish		White	White	White	White
Interior Finish		White painted steel	White painted steel	White painted steel	White painted steel
Lock		Yes	Yes	Yes	Yes
Type of Controller		Mechanical	Mechanical	Mechanical	Mechanical
Type of Cooling		Static	Static	Static	Static
Type of Defrost		Manual	Manual	Manual	Manual
Refrigerant		R600a	R290	R290	R290
Refrigerant Charge	g	55	85	105	110
Thermometer		Yes	Yes	Yes	Yes
Energy Class		D	D	D	D
Max Ambient		40°C at 40% RH			
Energy Consumption	kWh/24h	1,18	1,52	1,85	2,09
Annual Energy Cons.	kWh/year	431	555	674	762
Power Supply		13 Amp	13 Amp	13 Amp	13 Amp
Input Power	W	98	141	141	191
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	45	45	45	45
Internal Dimension (WxDxH)	mm	600 x 510 x 576	890 x 510 x 576	1180 x 510 x 571	1430 x 510 x 576
External Dimension (WxDxH)	mm	740 x 650 x 885	1030 x 650 x 885	1320 x 650 x 885	1570 x 650 x 885
Packed Dimension (WxDxH)	mm	810 x 765 x 940	1100 x 765 x 940	1390 x 765 x 940	1640 x 765 x 940
40ft Container Load	pcs	84	64	50	42

NIC-SCEB Ice Cream Freezers





DID YOU KNOW?

Our in-house branding team is happy to help make your products stand out and create "wow" effect. Contact our sales team to hear more.

NIC101CP

Ice Cream Freezer

- LED illuminated canopy
- Curved sliding lid with lock
- · Great product visibility
- · Ideal for branding
- Baskets
- Static cooling
- · Digital thermometer
- · Castors, 2 lockable





Baskets



Lock

Description

The NIC-SCEB premium range of ice cream freezers has a great design with curved corners, rounded edges, and curved sliding glass lids. It is a very stable and solid build, but at the same time on wheels so that it is easy to change location in the store. The freezer is great for displaying frozen food including ice cream and lollies.







- Angled display for better presentation
- Curved sliding lids with lock
- Includes full set of baskets
- Ideal for branding
- Digital thermometer
- Castors with brake
- Climate class 5 for high performance in warm surroundings



NIC401SCEB

Ice Cream Freezer



- Angled display for better presentation
- Curved sliding lids with lock
- Includes full set of baskets
- Ideal for branding
- Digital thermometer
- Castors with brake
- Climate class 5 for high performance in warm surroundings

		NIC101CP	NIC101SCEB	NIC201SCEB	NIC301SCEB	NIC401SCEB	NIC501SCEB
Lid No & Type		1 flat sliding glass lid	1 flat sliding glass lid	2 curved sliding glass			
Basket No & Type		2 Wire basket	-	2 Wire baskets, white	4 Wire baskets, white	5 Wire baskets, white	6 Wire baskets, white
Max No. of Baskets	pcs	2	2	2	4	5	6
Divider System		No	Yes				
Temperature Range	°C	-24 to -14	-24 to -14	-24 to -14	-24 to -14	-24 to -14	-24 to -14
Climate Class		5	5	5	5	5	5
Gross / Net Weight	kg	50 / 47	50 / 47	63 / 52	70 / 62	87 / 72	122 / 110
Gross / Net Volume	I	130 / 115	130 / 115	185 / 138	286 / 218	388 / 298	475 / 367
Castors		4 wheels, 2 with	4 wheels, 2 with	4 wheels, 2 with	4 wheels, 2 with	4 wheels, 2 with	4 wheels, 2 with
Exterior Finish		White	White	White	White	White	White
Interior Finish		White painted steel	White painted steel	White painted steel	White painted steel	White painted steel	White painted steel
Interior Light			No				
Lock		Yes	Yes	Yes	Yes	Yes	Yes
Type of Controller		Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Type of Cooling		Static	Static	Static	Static	Static	Static
Type of Defrost		Manual	Manual	Manual	Manual	Manual	Manual
Refrigerant		R600a	R600a	R600a	R290	R290	R290
Refrigerant Charge	g	50	50	55	85	105	110
Thermometer		Yes	Yes	Yes	Yes	Yes	Yes
Energy Class		D	D	D	D	D	D
Max Ambient		40°C at 40% RH		40°C at 40% RH			
Energy Consumption	kWh/24h	1,35	1,3	1,2	1,75	2,27	2,55
Annual Energy Cons.	kWh/year	491	473	439	638	829	929
Power Supply		13 Amp					13 Amp
Input Power	W	105	105	98	141	179	191
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	41	41	45	45	45	45
Internal Dimension (WxDxH)	mm	510 x 510 x 571	510 x 510 x 571	600 x 510 x 571	890 x 510 x 571	1180 x 510 x 571	1430 x 510 x 571
External Dimension (WxDxH)	mm	665 x 665 x 1080	665 x 665 x 918	740 x 650 x 918	1030 x 650 x 918	1320 x 650 x 918	1570 x 650 x 918
Packed Dimension (WxDxH)	mm	700 x 700 x 970	700 x 700 x 970	810 x 765 x 990	1100 x 765 x 990	1390 x 765 x 990	1640 x 765 x 990
40ft Container Load	pcs	102	102	84	64	50	42

Various Freezers





TD500

Two Level Display Freezer

- Ideal for optimizing store space
- Great product visibility
- Energy saving double glazed low-E glass lids
- LED interior light with switch
- Great branding possibilities
- Includes baskets
- 4 solid castors, 2 with brakes
- Canopy available upon request









Castors with and without brake

Description

The TD500 is a two level display freezer with room for 5 baskets on each level. It is a great choice for optimizing store space and it provides a nice overview of the products inside. Comes with LED lighting, double low-emissivity glass lids, and strong castors for enhanced mobility. Ideal for branding.



ST160

Ice Cream Freezer

- Flat hinged glass lid
- Thermometer
- Powder coated white steel inner liner
- Basket
- Castors with brake





CF78

Can Freezer

- Impulse freezer
- Fast pull-down of temperature
- Well suited for branding
- Divider system
- Flip-flop lid
- Strong castors



		CF78	ST160	TD500
Lid No & Type		1transparent acrylic flip-flop lid	1 hinged tempered glass lid	4 curved sliding temp. glass lids
Basket No & Type			2 Wire baskets, white	10 Wire baskets, white
Max No. of Baskets	pcs		2	10
Divider System		Yes	No	
Number of dividers	pcs		0	10
Temperature Range	°C	-22 to -12	-24 to -14	-21 to -15
Climate Class		4	4	4
Gross / Net Weight	kg	33 / 29	43 / 35	157 / 121
Gross / Net Volume	I	80 / 72	115 / 105	450 / 408
Castors		4 castors, 1 lockable	4 double castors	4 wheels, 2 with brake
Exterior Finish		White	White	White
Interior Finish		Powder coated steel	White painted steel	White
Interior Light		No	No	LED
Lock		No	No	Yes
Type of Controller		Mechanical	Mechanical	Mechanical
Type of Cooling		Static	Static	Static
Type of Defrost		Manual	Manual	Manual
Refrigerant		R600a	R600a	R290
Refrigerant Charge	g	40	60	80
Thermometer		No	Yes	No
Energy Class		D	D	F
Max Ambient		30°C at 55% RH		
Energy Consumption	kWh/24h	1,26	1,15	7,16
Annual Energy Cons.	kWh/year	460	420	2612
Input Power	W	124	80	650
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	45	45	55
Internal Dimension (WxDxH)	mm	454 x 454 x 440	435 x 435 x 755	
External Dimension (WxDxH)	mm	567 x 567 x 830	550 x 630 x 930	1210 x 790 x 1213
Packed Dimension (WxDxH)	mm	580 x 580 x 880	655 x 600 x 955	1300 x 885 x 1280
40ft Container Load	pcs	238	156	44

IC-SC Scoop Ice Cream Freezers





Storage based on 5L plastic tubs





Layout based on baskets with 5L plastic tubs




IC401SC+SO

Scoop Ice Cream Freezer

- Sneeze guard in curved glass
- Flat sliding glass lids with lock
- Storage under baskets
- · Great branding possibilities
- Digital thermometer
- Castors with brake
- Climate class 5 for high performance in warm surroundings
- Optional Scooping baskets for plastic tubs









Scoop wash option

Description

The IC-SO range of scoop ice cream freezers offers great quality at a competitive prize. The model has flat sliding lids that allow easy access to the ice cream for serving and help insulate the unit when not in use. It has a serve over glass top and is ideal for branding to attract more attention to the unit and its cold content. The freezer is optimized for baskets that can hold 5 I plastic tubs in the top and room for storage underneath.



Layout based on baskets with 5L plastic tubs











Layout based on baskets with 5L plastic tubs

Storage based on 5L plastic tubs








IC201SC+SO

Scoop Ice Cream Freezer



- Flat sliding glass lids with lock
- Storage under baskets
- Castors with brake
- Climate class 5 for high performance in warm surroundings
- Optional Scooping baskets for plastic tubs
- This model fits 4 x 5 l plastic tubs

IC301SC+SO

Scoop Ice Cream Freezer



- Sneeze guard in curved glass
- Flat sliding glass lids with lock
- Storage under baskets
- Great branding possibilities
- Digital thermometer
- Castors with brake
- Climate class 5 for high performance in warm surroundings
- Optional Scooping baskets for plastic tubs
- This model fits 7 x 5 l plastic tubs

				<u> </u>	
		IC201SC+SO	IC301SC+SO	IC401SC+SO	IC501SC+SO
Serving Capacity		4 Plastic Tubs (5 L)	7 Plastic Tubs (5 L)	10 Plastic Tubs (5 L)	12 Plastic Tubs (5 L)
Storage Capacity (under)		7 Plastic Tubs (5 L)	13 Plastic Tubs (5 L)	19 Plastic Tubs (5 L)	22 Plastic Tubs (5 L)
SneezeGuard		Yes	Yes	Yes	Yes
Lid No & Type		2 flat sliding temp. glass lids			
Basket No & Type		Additional (see drawings)	Additional (see drawings)	Additional (see drawings)	Additional (see drawings)
Temperature Range	°C	-24 to -14	-24 to -14	-24 to -14	-24 to -14
Climate Class		5	5	5	5
Gross / Net Weight	kg	92 / 84	116 / 107	130 / 120	117 / 107
Gross / Net Volume	I	191 / 165	296 / 255	401 / 350	491 / 430
Castors		4 wheels, 2 with brake			
Exterior Finish		White	White	White	White
Interior Finish		White painted steel	White painted steel	White painted steel	White painted steel
Lock		Yes	Yes	Yes	Yes
Type of Controller		Mechanical	Mechanical	Mechanical	Mechanical
Type of Cooling		Static	Static	Static	Static
Type of Defrost		Manual	Manual	Manual	Manual
Refrigerant		R600a	R290	R290	R290
Refrigerant Charge	g	55	85	105	110
Thermometer		Yes	Yes	Yes	Yes
Energy Class		D	D	D	D
Energy Consumption	kWh/24h	1,46	1,78	2,35	2,73
Annual Energy Cons.	kWh/year	534	648	857	997
Input Power	W	98	141	141	191
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	45	45	45	45
Internal Dimension (WxDxH)	mm	600 x 510 x 655	890 x 510 x 655	1180 x 510 x 655	1430 x 510 x 655
External Dimension (WxDxH)	mm	720 x 630 x 1250	1010 x 630 x 1250	1300 x 630 x 1250	1550 x 630 x 1250
Packed Dimension (WxDxH)	mm	800 x 750 x 1130	1100 x 750 x 1130	1400 x 750 x 1130	1640 x 750 x 1130
40ft Container Load	pcs	92	64	50	42

IC-SCE Scoop Ice Cream Freezers





Storage based on 5L plastic tubs







IC401SCE+SO

Scoop Ice Cream Freezer

- Sneeze guard in curved glass
- Angled sliding lids with lock
- Storage under baskets
- Castors with brake
- Climate class 5 for high performance in warm surroundings
- Optional Scooping baskets for plastic tubs







Scooping basket option


Scoop wash option

Description

The IC-SO range of scoop ice cream freezers offers great quality at a competitive prize. The model has sliding lids that allow easy access to the ice cream for serving and help insulate the unit when not in use. It has a serve over glass top and is ideal for branding to attract more attention to the unit and its cold content. The freezer is optimized for baskets that can hold 5 I plastic tubs in the top and room for storage underneath.



Layout based on baskets with 5L plastic tubs









skets with 5L Storage based or

Layout based on baskets with 5L plastic tubs

Storage based on 5L plastic tubs







IC201SCE+SO

Scoop Ice Cream Freezer

- Sneeze guard in curved glass
- Angled sliding lids with lock
- Storage under baskets
- Castors with brake
- Climate class 5 for high performance in warm surroundings
- Optional Scooping baskets for plastic tubs
- This model fits 4 x 5 l plastic tubs

IC301SCE+SO

Scoop Ice Cream Freezer



- Sneeze guard in curved glass
- Angled sliding lids with lock
- Storage under baskets
- Castors with brake
- Climate class 5 for high performance in warm surroundings
- Optional Scooping baskets for plastic tubs
- This model fits 7 x 5 l plastic tubs

· This model his 4 x 3 i plastic tubs			- This model his 7 x 3 i plastic tubs			
		IC201SCE+SO	IC301SCE+SO	IC401SCE+SO	IC501SCE+SO	
Serving Capacity		4 Plastic Tubs (5 L)	7 Plastic Tubs (5 L)	9 Plastic Tubs (5 L)	11 Plastic Tubs (5 L)	
Storage Capacity (under)		7 Plastic Tubs (5 L)	13 Plastic Tubs (5 L)	19 Plastic Tubs (5 L)	22 Plastic Tubs (5 L)	
SneezeGuard		Yes	Yes	Yes	Yes	
Lid No & Type		2 flat angled sliding temp. glass	2 flat angled sliding temp. glass	2 flat angled sliding temp. glass	2 flat angled sliding temp. glass	
Basket No & Type		Additional (see drawings)	Additional (see drawings)	Additional (see drawings)	Additional (see drawings)	
Temperature Range	°C	-24 to -14	-24 to -14	-24 to -14	-24 to -14	
Climate Class		5	5	5	5	
Gross / Net Weight	kg	96 / 89	115 / 102	132 / 122	127 / 117	
Gross / Net Volume	I	176 / 157	264 / 230	352 / 325	427 / 398	
Castors		4 wheels, 2 with brake	4 wheels, 2 with brake	4 wheels, 2 with brake	4 wheels, 2 with brake	
Exterior Finish		White	White	White	White	
Interior Finish		White painted steel	White painted steel	White painted steel	White painted steel	
Lock		Yes	Yes	Yes	Yes	
Type of Controller		Mechanical	Mechanical	Mechanical	Mechanical	
Type of Cooling		Static	Static	Static	Static	
Type of Defrost		Manual	Manual	Manual	Manual	
Refrigerant		R600a	R290	R290	R290	
Refrigerant Charge	g	55	85	105	110	
Thermometer		Yes	Yes	Yes	Yes	
Energy Class		D	D	D	D	
Energy Consumption	kWh/24h	1,51	2,08	2,19	2,55	
Annual Energy Cons.	kWh/year	552	758	799	929	
Input Power	W	98	141	141	191	
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	
Noise Level	dB(A)	45	45	45	45	
Internal Dimension (WxDxH)	mm	500 x 495 x 710	890 x 495 x 710	1180 x 495 x 710	1430 x 500 x 708	
External Dimension (WxDxH)	mm	720 x 615 x 1295	1010 x 615 x 1295	1300 x 615 x 1295	1554 x 620 x 1296	
Packed Dimension (WxDxH)	mm	800 x 750 x 1200	1100 x 750 x 1200	1400 x 750 x 1200	1640 x 750 x 1200	
40ft Container Load	pcs	92	64	50	42	

Mirabella & Isabella Scoop Ice Cream



Mirabella Scoop Ice Cream Freezers

- Flat top/glass top
- Suitable for Napoli Pans (not included)
- Storage under baskets
- LED interior light with switch
- Static cooling
- Digital controller and temperature display
- Fully automatic
- Lift up rear lid (2 can serve)
- Castors

Description

The Mirabella range of scoop ice cream freezers is a leap forward in design and product presentation. It holds the ice cream up high, so it is easier to see from a distance, helping draw customers in. It is of course suitable for Napoli pans (not included), and below the displayed ice cream, there is a storage compartment for easy refill of the most selling ice cream.



Isabella Scoop Ice Cream Freezers

- Fully automatic
- Sneeze guard in curved glass
- Suitable for Napoli Pans (not included)
- Static cooling
- LED interior light with switch
- Easy access storage compartment
- Digital controller and temperature display
- Rear night curtain to maintain temperature
- Castors

Description

The Isabella range is spacious ice cream scooping cabinet with 10 or 13 pan options. Its curved glass design make for an eye catching display that is sure to delight you customers and the rear serving shelf help aid with fast service. With built-in refrigerated under storage, you can easily restock the display with fresh ice cream during busy periods. Additionally, the cabinet comes with castors for easy manoeuvrability and an internal LED light to showcase your ice cream in the best possible light.

				oossible light.		
		ISABELLA 10LX	ISABELLA 13LX	MIRABELLA 6	MIRABELLA 7	MIRABELLA 9
Serving Capacity		10 Napoli pans (5 L)	13 Napoli Pans (5 L)	6 Napoli Pans (5 L)	7 Napoli Pans (5 L)	9 Napoli pans (5 L)
Storage Capacity (under)		10 Napoli pans (5 L)	14 Napoli pans (5 L)	12 Napoli pans (5 L)	16 Napoli pans (5 L)	21 Napoli pans (5 L)
Total Display Area	m²	0,59	0,77	0,36	0,42	0,53
Temperature Range	°C	-16 to -14	-16 to -14	-20 to -5	-20 to -5	-20 to -5
Climate Class		4	4	4	4	4
Gross / Net Weight	kg	155 / 132	223 / 192	137 / 117	145 / 124	157 / 136
Gross / Net Volume	I			276 / 184	329 / 223	439 / 306
Castors				4 castors	4 castors	4 castors
Exterior Finish		Grey	Grey	Anthracite RAL 7016	Anthracite RAL 7016	Anthracite RAL 7016
Interior Finish		White	White	Grey / Stainless Steel	Grey / Stainless Steel	Grey / Stainless Stee
Interior Light		LED	LED	LED	LED	LED
Type of Controller		Electronic	Electronic	Electronic	Electronic	Electronic
Type of Cooling		Static	Static	Static	Static	Static
Type of Defrost		Automatic, hot gas	Automatic, hot gas	Automatic	Automatic	Automatic
Refrigerant		R290	R290	R290	R290	R290
Refrigerant Charge	g	120	135 / 45	85	85	125
Thermometer		Yes	Yes	Yes	Yes	Yes
Energy Class		C	C	C	C	C
Max Ambient		30°C at 55% RH	30°C at 55% RH	30°C at 55% RH	30°C at 55% RH	30°C at 55% RH
Energy Consumption	kWh/24h	9,6	11,84	10,75	11,54	14,26
Annual Energy Cons.	kWh/year	3504	4322	3924	4212	5205
Power Supply		13 Amp	13 Amp	13 Amp	13 Amp	13 Amp
Input Power	W	550	1240	500	580	700
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	54	57	42	42	42
Internal Dimension (WxDxH)	mm					
External Dimension (WxDxH)	mm	1317 x 906 x 1372	1647 x 906 x 1372	1187 x 677 x 1190	1337 x 677 x 1190	1652 x 677 x 1190
Packed Dimension (WxDxH)	mm	1418 x 978 x 1450	1748 x 978 x 1450	1270 x 740 x 1290	1420 x 740 x 1290	1735 x 740 x 1290
40ft Container Load	pcs	16	13	27	24	20

UDRS Scoop Ice Cream Freezers



Layout based on baskets with 5L plastic tubs




UDRS10

Scoop Ice Cream Freezer

- Static cooling
- Sneeze guard in angled glass
- Interior light with switch
- · Flat sliding lids
- Castors with brake
- Suitable for Napoli Pans (not included)
- Easy access storage compartment









Easy access storage compartment

Description

The UDRS range of scoop ice cream freezers is a part of TEFCOLDs premium freezer program. It offers high quality and an elegant design with a lower front, which ensures great visibility of the ice cream. The freezer has lift up rear lid, which help insulate and save energy, when you are not serving ice cream over the angled glass guard. It is of course suitable for Napoli pans (not included).



Layout based on baskets with 5L plastic tubs



Layout based on baskets with 5L plastic tubs





UDRS9

Scoop Ice Cream Freezer

- Sneeze guard in curved glass
- Static cooling
- Lift up rear lid (2 can serve)
- LED interior light with switch
- Digital controller and temperature display
- Suitable for Napoli Pans (not included)
- Easy access storage compartment
- Automatic defrost
- Optional Rear shelf with scoop wash

UDRS7

Scoop Ice Cream Freezer



- Sneeze guard in curved glass
- Static cooling
- Lift up rear lid (2 can serve)
- LED interior light with switch
- Digital controller and temperature display
- Suitable for Napoli Pans (not included)
- Easy access storage compartment
- Automatic defrost
- Optional Rear shelf with scoop wash

-		The trial see of trasi.		
		UDRS10	UDRS7	UDRS9
Serving Capacity		10 Napoli pans (5 L)	7 Napoli Pans (5 L)	9 Napoli pans (5 L)
Storage Capacity (under)		12 Napoli pans (5 L)	12 Napoli pans (5 L)	16 Napoli pans (5 L)
SneezeGuard		Yes	Yes	Yes
Total Display Area	m²	0,59	0,42	0,53
Temperature Range	°C	-20 to -14	-20 to -14	-20 to -14
Climate Class		4	4	4
Gross / Net Weight	kg	112 / 103	119 / 98	131 / 110
Gross / Net Volume	I	431 / 342	317 / 264	423 / 357
Castors		4 double castors	4 double castors	4 double castors
Exterior Finish		White	White	White
Interior Finish		White painted steel	White painted steel	White painted steel
nterior Light		No	LED	LED
Lock		No	No	No
Type of Controller		Mechanical	Electronic	Electronic
Type of Cooling		Static	Static	Static
Type of Defrost		Manual	Automatic	Automatic
Refrigerant		R290	R290	R290
Refrigerant Charge	g	100	130	150
Thermometer		Yes	Yes	Yes
Energy Class		В	С	С
Energy Consumption	kWh/24h	5,12	8,83	11,83
Annual Energy Cons.	kWh/year	1868	3223	4318
nput Power	W	360	500	540
Noise Level	dB(A)	45	45	45
nternal Dimension (WxDxH)	mm	1217 x 563 x 295	1217 x 450 x 240	1532 x 450 x 240
External Dimension (WxDxH)	mm	1341 x 725 x 1235	1341 x 723 x 1253	1656 x 723 x 1253
Packed Dimension (WxDxH)	mm	1385 x 730 x 1020	1420 x 760 x 1310	1735 x 760 x 1310
40ft Container Load	pcs	50	24	20

5 ICE CREAM FREEZERS

ISOA Scoop Ice Cream Freezers





Layout based on baskets with 5L and 2.5L plastic tubs



ISOA12W1

Scoop Ice Cream Freezer

- Sneeze guard in curved glass
- Sliding glass lids
- Includes full set of baskets
- Storage under baskets
- · Ideal for branding
- Internal LED light
- Strong castors
- Static cooling









Curved glass for nice presentation

Description

The ISOA range of scoop ice cream freezers provides a spacious design at a competitive price. It is ideal for custom branding which can help to attract more attention to your delicious ice cream flavors. Each ISOA freezer features flat sliding glass lids for easy access to the ice cream when serving and helps insulate the unit when it's not in use. Baskets for 5-liter plastic tubs are included.



Layout based on baskets with 5L and 2.5L plastic tubs



ISOA14W1

Scoop Ice Cream Freezer

- Sneeze guard in curved glass
- Sliding glass lids
- Includes full set of baskets
- Storage under baskets
- Ideal for branding
- Internal LED light
- Strong castors
- Static cooling

• Static cooling			
		ISOA12W1	ISOA14W1
Serving Capacity		12 Plastic Tubs (5 L)	14 Plastic Tubs (5 L)
SneezeGuard		Yes	Yes
Max No. of Baskets	pcs	3	3
Temperature Range	°C	-23 to -16	-23 to -16
Climate Class		7	7
Gross / Net Weight	kg	126 / 119	133 / 126
Gross / Net Volume	I	503 / 408	602 / 489
Castors		Wheels	Wheels
Exterior Finish		White RAL9010	White RAL9010
Interior Finish		White RAL9010	White RAL9010
Interior Light		LED	LED
Lock		No	No
Type of Controller		Mechanical	Mechanical
Type of Cooling		Static	Static
Type of Defrost		Manual	Manual
Refrigerant		R290	R290
Refrigerant Charge	g	96	112
Thermometer		Yes	Yes
Energy Class		D	D
Max Ambient		35°C at 75% RH	35°C at 75% RH
Energy Consumption	kWh/24h	2,31	2,71
Annual Energy Cons.	kWh/year	842	990
Input Power	W	215	241
Voltage / Frequency	V/Hz	220-240/50	220-240/50
Noise Level	dB(A)	49	49
Internal Dimension (WxDxH)	mm	1386 x 536 x 688	1646 x 536 x 688
External Dimension (WxDxH)	mm	1544 x 694 x 1330	1804 x 694 x 1330
Packed Dimension (WxDxH)	mm	1590 x 880 x 760	1860 x 880 x 760
40ft Container Load	pcs	64	53

Super Capri Scoop Ice Cream Freezers



DID YOU KNOW?

Ventilated freezers are also ideal for displaying gelato, as gelato requires a more consistent temperature than cream-based ice cream.



SUPER CAPRI 24

Ventilated Scoop Ice Cream Display



- Double air flow ensures even cooling of 2 rows of pans
- LED interior light with switch
- Angled deck (11°) for a better display
- Suitable for Napoli Pans (not included)
- Heated glass to help prevent condensation
- · Hinged glass for easy cleaning
- · Acrylic rear sliding doors to display area
- Optional scoop wash (needs water & waste connection)



Glass end walls as standard



Double airflow cooling

Description

The Super Capri range of ventilated scoop ice cream freezers is ideal for showcasing gelato and ice cream. With large glass panels and LED lighting, products are presented beautifully. The 11° angled display enhances the view, while the double airflow cooling ensures even temperature distribution over each row of pans. Heated glass prevents condensation, while hinged front glass allows easy cleaning. Available in several sizes.





SUPER CAPRI 12

Ventilated Scoop Ice Cream Display



- Double air flow ensures even cooling of 2 rows of pans
- LED interior light with switch
- Angled deck (11°) for a better display
- Suitable for Napoli Pans (not included)
- Heated glass to help prevent condensation
- · Hinged glass for easy cleaning
- Acrylic rear sliding doors to display area
- Optional scoop wash (needs water & waste connection)

SUPER CAPRI 18



Ventilated Scoop Ice Cream Display

- Fully automatic
- Double air flow ensures even cooling of 2 rows of pans
- LED interior light with switch
- Angled deck (11°) for a better display
- Suitable for Napoli Pans (not included)
- Heated glass to help prevent condensation
- · Hinged glass for easy cleaning
- Acrylic rear sliding doors to display area
- Optional scoop wash (needs water & waste connection)

		SUPER CAPRI 12	SUPER CAPRI 18	SUPER CAPRI 24
Serving Capacity		12 Napoli Pans (5 L)	18 Napoli Pans (5 L)	24 Napoli Pans (5 L)
Storage Capacity (under)		No under storage	No under storage	No under storage
Total Display Area	m²	0,71	1,07	1,43
Temperature Range	°C	-20 to -14	-20 to -14	-20 to -14
Climate Class		7	7	7
Gross / Net Weight	kg	308 / 240	454 / 350	600 / 460
Gross / Net Volume	1			
Feet / Legs		Adjustable feet	Adjustable feet	Adjustable feet
Castors		Castors	Castors	Castors
Exterior Finish		Grey RAL7022	Grey RAL7022	Grey RAL7022
Interior Finish		Stainless steel	Stainless steel	Stainless steel
Interior Light		LED	LED	LED
Type of Cooling		Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic, hot gas	Automatic, hot gas	Automatic, hot gas
Refrigerant		R290	R290	R290
Thermometer		Yes	Yes	Yes
Energy Class		D	D	D
Max Ambient		35°C at 75% RH	35°C at 75% RH	35°C at 75% RH
Energy Consumption	kWh/24h	21,85	28,36	33,93
Annual Energy Cons.	kWh/year	7976	10353	12384
Power Supply		16 Amp Single Phase Commando Socket	3 Phase Supply	3 Phase Supply
Input Power	W	1050	1720	1750
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
Internal Dimension (WxDxH)	mm	725 x	725 x	725 x
External Dimension (WxDxH)	mm	1187 x 1110 x 1175	1682 x 1110 x 1175	2177 x 1110 x 1175
Packed Dimension (WxDxH)	mm	1400 x 1400 x 1600	1900 x 1400 x 1600	2400 x 1400 x 1600
40ft Container Load	pcs	8	8	5


Bermuda Scoop Ice Cream Freezers



Installation





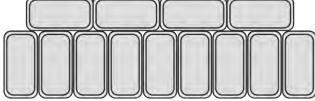

BERMUDA VIEW RV13

Ventilated Scoop Ice Cream Display

- High vision display (low front glass)
- Perfect temperature distribution
- Heated glass to help prevent condensation
- Suitable for Napoli Pans (not included)
- · LED interior light with switch
- Digital controller and temperature display
- Easy access storage compartment
- Rear night curtain to maintain temperature
- Ventilated cooling
- Automatic defrost









Rear night curtain to maintain temperature


Description

The Bermuda View range is all about displaying the ice cream. It therefore has a low front glass for better visibility. The Bermuda range is available in two display sizes, either 10 or 13 pans. The cabinet is equipped with a ventilated cooling system that ensures your ice cream or gelato is kept at the ideal serving temperature. Additionally, the unit features separate refrigerated under storage. The Bermuda's sleek curved glass design is both elegant and practical, featuring a heated surface to prevent condensation.





Layout based on 5L Napoli pans





BERMUDA RV10

Ventilated Scoop Ice Cream Display

- Perfect temperature distribution
- Heated glass to help prevent condensation
- Suitable for Napoli Pans (not included)
- LED interior light with switch
- Digital controller and temperature display
- Easy access storage compartment
- Rear night curtain to maintain temperature
- Ventilated cooling
- Automatic defrost



BERMUDA RV13



Ventilated Scoop Ice Cream Display

- Perfect temperature distribution
- Heated glass to help prevent condensation
- Suitable for Napoli Pans (not included)
- LED interior light with switch
- Digital controller and temperature display
- Easy access storage compartment
- Rear night curtain to maintain temperature
- Ventilated cooling
- Automatic defrost

· Automatic den	USL		Aut	omatic demost	
		BERMUDA RV10	BERMUDA RV13	BERMUDA VIEW RV10	BERMUDA VIEW RV13
Serving Capacity		10 Napoli pans (5 L)	13 Napoli Pans (5 L)	10 Napoli pans (5 L)	13 Napoli Pans (5 L)
Storage Capacity (under)		10 Napoli pans (5 L)	14 Napoli pans (5 L)	10 Napoli pans (5 L)	14 Napoli pans (5 L)
SneezeGuard		Yes	Yes	Yes	Yes
Total Display Area	m²	0,65	0,84	0,65	0,84
Temperature Range	°C	-20 to -14	-20 to -14	-20 to -14	-20 to -14
Climate Class		4	4	7	7
Gross / Net Weight	kg	200 / 180	220 / 200	226 / 195	255 / 235
Gross / Net Volume	I	300 / 255	395 / 325	300 / 255	395 / 325
Castors		4 castors	4 castors	4 castors	4 castors
Exterior Finish		Grey	Grey	White	White
Interior Finish		White painted steel	White painted steel	White	White
Interior Light		LED	LED	LED	LED
Lock		No	No	No	No
Type of Controller		Electronic	Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic, hot gas	Automatic, hot gas	Automatic, hot gas	Automatic, hot gas
Refrigerant		R290	R290	R290	R290
Refrigerant Charge	g	130	195	195	195
Thermometer		Yes	Yes	Yes	Yes
Energy Class		D	D	D	D
Max Ambient		30°C at 55% RH	30°C at 55% RH	35°C at 75% RH	35°C at 75% RH
Energy Consumption	kWh/24h	22	22,8	22	22,8
Annual Energy Cons.	kWh/year	8030	8322	8213	8322
Power Supply		13 Amp	13 Amp	13 Amp	13 Amp
Input Power	W	770	1340	1250	1600
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	54	56	56	56
Internal Dimension (WxDxH)	mm	1200 x 517 x 232	1530 x 517 x 232	1200 x	1530 x 510 x 210
External Dimension (WxDxH)	mm	1340 x 800 x 1343	1670 x 800 x 1343	1340 x 814 x 1354	1670 x 814 x 1354
Packed Dimension (WxDxH)	mm	1410 x 860 x 1466	1740 x 860 x 1466	1410 x 860 x 1455	1740 x 860 x 1455
40ft Container Load	pcs	16	13	16	13





ICE CREAM FREEZERS

Millennium LX Scoop Ice Cream Freezers






Installation





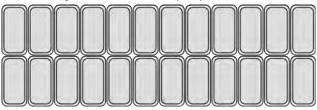


MILLENNIUM LX24

Ventilated Scoop Ice Cream Display

- Great product presentation
- Suitable for Napoli Pans (not included)
- Heated glass to help prevent condensation
- · Double glazed glass on sides
- · LED interior light with switch
- Digital controller and temperature display
- Rear night curtain to maintain temperature









Heated front glass

Description

The Millennium LX range of scooping cabinets is available in sizes for 12 to 24 napoli pans. This premium cabinet with stylish curved glass can therefore showcase a wide variety of delicious flavors. The efficient, ventilated cooling system ensures even cooling of your ice cream or gelato, making sure it is the perfect temperature for easy scooping. The glass is heated to help prevent condensation and there is a pull-down curtain.



Layout based on 5L Napoli pans



Layout based on 5L Napoli pans



MILLENNIUM LX12



Ventilated Scoop Ice Cream Display

- Great product presentation
- Suitable for Napoli Pans (not included)
- Heated glass to help prevent condensation
- Double glazed glass on sides
- LED interior light with switch
- Digital controller and temperature display
- Rear night curtain to maintain temperature



MILLENNIUM LX20



Ventilated Scoop Ice Cream Display

- Great product presentation
- Suitable for Napoli Pans (not included)
- Heated glass to help prevent condensation
- Double glazed glass on sides
- LED interior light with switch
- Digital controller and temperature display
- Rear night curtain to maintain temperature


• Rear night curtain to maintain temperature			• Rear night curtain to maintain temperature			
		MILLENNIUM LX12	MILLENNIUM LX16	MILLENNIUM LX18	MILLENNIUM LX20	MILLENNIUM LX24
Serving Capacity		12 Napoli Pans (5 L)	16 Napoli Pans (5 L)	18 Napoli Pans (5 L)	20 Napoli Pans (5 L)	24 Napoli Pans (5 L)
Storage Capacity (under)		No under storage	No under storage	No under storage	No under storage	No under storage
Total Display Area	m²	0,71	0,95	1,07	1,19	1,43
Temperature Range	°C	-20 to -14	-20 to -14	-20 to -14	-20 to -14	-20 to -14
Climate Class		7	7	7	7	7
Gross / Net Weight	kg	290 / 250	313 / 270	313 / 270	421 / 363	478 / 412
Gross / Net Volume	I	630 / 118	870 / 160	970 / 181	1080 / 201	1300 / 241
Exterior Finish		White	White	White	White	White
Interior Finish		Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Interior Light		LED	LED	LED	LED	LED
Type of Cooling		Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic, hot gas	Automatic, hot gas	Automatic, hot gas	Automatic, hot gas	Automatic, hot gas
Refrigerant		R290	R290	R290	R290	R290
Refrigerant Charge	g	148	2 x 148	2 x 148	2 x 148	2 x 148
Thermometer		Yes	Yes	Yes	Yes	Yes
Energy Class		D	D	D	D	D
Max Ambient		35°C at 75% RH	35°C at 75% RH	35°C at 75% RH	35°C at 75% RH	35°C at 75% RH
Energy Consumption	kWh/24h	20,43	26,27	28,62	30,35	34
Annual Energy Cons.	kWh/year	7456	9587	10445	11076	12410
Power Supply		13 Amp	16 Amp Single Phase	16 Amp Single Phase	16 Amp Single Phase	16 Amp Single Phase
Input Power	W	1400	2340	2450	2560	2640
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	54	56	56	58	58
Internal Dimension (WxDxH)	mm					
External Dimension (WxDxH)	mm	1166 x 1080 x 1356	1496 x 1080 x 1356	1661 x 1080 x 1356	1826 x 1080 x 1356	2156 x 1080 x 1356
Packed Dimension (WxDxH)	mm	1250 x 1150 x 1620	1150 x 1620 x 1620	1800 x 1150 x 1620	2000 x 1150 x 1620	2300 x 1150 x 1620
40ft Container Load	pcs	18	14	13	12	10

5 ICE CREAM FREEZERS

Millennium ST Scoop Ice Cream Freezers





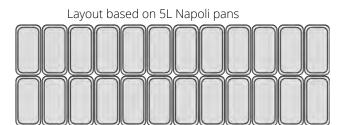


MILLENNIUM ST24

Ventilated Scoop Ice Cream Display

- Great product visibility
- Flat top/glass top
- Suitable for Napoli Pans (not included)
- LED interior light with switch
- Digital controller and temperature display
- Front glass hinges forward if required
- Double glazed glass on sides
- Heated glass to help prevent condensation









Heated front glass

Description

The Millennium ST range of scooping cabinets is available in sizes for 12 to 24 napoli pans. This premium cabinet with comtemporary flat glass can therefore showcase a wide variety of delicious flavors. The efficient, ventilated cooling system ensures even cooling of your ice cream or gelato, making sure it is the perfect temperature for easy scooping. The glass is heated to help prevent condensation and there is a pull-down curtain.



Layout based on 5L Napoli pans



Layout based on 5L Napoli pans



MILLENNIUM ST16



Ventilated Scoop Ice Cream Display

- Great product visibility
- Flat top/glass top
- Suitable for Napoli Pans (not included)
- LED interior light with switch
- Digital controller and temperature display
- Front glass hinges forward if required
- Double glazed glass on sides
- Heated glass to help prevent condensation



MILLENNIUM ST18



Ventilated Scoop Ice Cream Display

- Great product visibility
- Flat top/glass top
- Suitable for Napoli Pans (not included)
- LED interior light with switch
- Digital controller and temperature display
- Front glass hinges forward if required
- Double glazed glass on sides
- Heated glass to help prevent condensation

 Heated glass to 	neip pr	event condensatioi	n	 Heated glass to n 	eip prevent conder	isation
		MILLENNIUM ST12	MILLENNIUM ST16	MILLENNIUM ST18	MILLENNIUM ST20	MILLENNIUM ST24
Serving Capacity		12 Napoli Pans (5 L)	16 Napoli Pans (5 L)	18 Napoli Pans (5 L)	20 Napoli Pans (5 L)	24 Napoli Pans (5 L)
Storage Capacity (under)		No under storage	No under storage	No under storage	No under storage	No under storage
Total Display Area	m²	0,71	0,95	1,07	1,19	1,43
Temperature Range	°C	-20 to -14	-20 to -14	-20 to -14	-20 to -14	-20 to -14
Climate Class		7	7	7	7	7
Gross / Net Weight	kg	273 / 235	313 / 270	313 / 270	421 / 363	478 / 412
Gross / Net Volume	I	630 / 118	870 / 160	970 / 181	1080 / 201	1300 / 241
Exterior Finish		White	White	White	White	White
Interior Finish		Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Interior Light		LED	LED	LED	LED	LED
Type of Cooling		Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic, hot gas	Automatic, hot gas	Automatic, hot gas	Automatic, hot gas	Automatic, hot gas
Refrigerant		R290	R290	R290	R290	R290
Refrigerant Charge	g	2 x 148	2 x 148	2 x 148	2 x 148	2 x 148
Thermometer		Yes	Yes	Yes	Yes	Yes
Energy Class		D	D	D	D	D
Max Ambient		35°C at 75% RH	35°C at 75% RH	35°C at 75% RH	35°C at 75% RH	35°C at 75% RH
Energy Consumption	kWh/24h	19,83	25,5	28,33	29,75	34
Annual Energy Cons.	kWh/year	7239	9308	10342	10859	12410
Power Supply		13 Amp	16 Amp Single Phase	16 Amp Single Phase	16 Amp Single Phase	16 Amp Single Phase
Input Power	W	1400	2340	2450	2560	2640
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	54	56	56	58	58
Internal Dimension (WxDxH)	mm					
External Dimension (WxDxH)	mm	1166 x 1054 x 1356	1496 x 1054 x 1356	1661 x 1054 x 1356	1826 x 1054 x 1356	2156 x 1054 x 1356
Packed Dimension (WxDxH)	mm	1200 x 1550 x 1620	1600 x 1150 x 1620	1800 x 1150 x 1620	2000 x 1150 x 1620	2300 x 1550 x 1620
40ft Container Load	pcs	18	14	13	12	10

Fiji & Delta RV Scoop Ice Cream Freezers






Temperature



DELTA RV

Ventilated Scoop Ice Cream Display



- Dual digital controllers and temperature displays
- · Fully automatic, ventilated cooling
- Suitable for Napoli Pans (not included)
- LED interior light with switch
- Castors, 2 lockable
- · Plexiglass rear sliding doors



Night Cover



Optional finishes

Description

The DELTA RV offers a space-saving design that can accommodate up to 12 Napoli pans while occupying a minimal footprint. It features a dual-zone refrigeration system that allows for two separate temperature zones, each with its own temperature controller and display, enabling you to serve ice cream, gelato, or sorbets at their ideal temperature.



Layout based on 5L Napoli pans



Layout based on 5L Napoli pans



FIJI 4

Ventilated Scoop Ice Cream Display

- Fully automatic
- Ventilated cooling
- Curved top/glass top/front
- LED interior light with switch
- Digital controller and temperature display
- Suitable for Napoli Pans (not included)
- Castors



FIJI 7

Ventilated Scoop Ice Cream Display



- Fully automatic
- Ventilated cooling
- Curved top/glass top/front
- LED interior light with switch
- Digital controller and temperature display
- Lift up rear lid (2 can serve)
- Suitable for Napoli Pans (not included)
- Castors

		· Castors					
		DELTA RV	FIJI 4	FIJI 6	FIJI 7		
Serving Capacity		12 Napoli Pans (5 L)	4+4 Napoli Pans (5 L)	6+6 Napoli Pans (5 L)	7+7 Napoli Pans (5 L)		
Storage Capacity (under)		No under storage	No under storage	No under storage	No under storage		
Total Display Area	m²	0,71	0,24	0,36	0,42		
Temperature Range	°C	-20 to -10	-18 to -14	-18 to -14	-18 to -14		
Climate Class		4	5	5	5		
Gross / Net Weight	kg	244 / 210	77 / 67	109 / 99	125 / 110		
Gross / Net Volume	I						
Exterior Finish		White / Black	White	White	White		
Interior Finish		Stainless steel	White	White	White		
Interior Light		LED	LED	LED	LED		
Type of Cooling		Ventilated	Ventilated	Ventilated	Ventilated		
Type of Defrost		Automatic, hot gas	Automatic, hot gas	Automatic, hot gas	Automatic, hot gas		
Refrigerant		R290	R290	R290	R290		
Refrigerant Charge	g		120	120	120		
Thermometer		Yes	Yes	Yes	Yes		
Energy Class		С	C	C	С		
Max Ambient		30°C at 55% RH	40°C at 40% RH	40°C at 40% RH	40°C at 40% RH		
Energy Consumption	kWh/24h	15,4	6,5	8,49	9,5		
Annual Energy Cons.	kWh/year	5621	2373	3099	3468		
Power Supply		13 Amp	13 Amp	13 Amp	13 Amp		
Input Power	W	1350	555	900	900		
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50		
Internal Dimension (WxDxH)	mm		340 x	340 x	340 x		
External Dimension (WxDxH)	mm	1276 x 819 x 1229	824 x 630 x 1247	1214 x 630 x 1247	1354 x 630 x 1247		
Packed Dimension (WxDxH)	mm	1350 x 900 x 1500	938 x 703 x 1190	1328 x 703 x 1190	1458 x 703 x 1190		
40ft Container Load	pcs	21	37	27	25		

6 COLD ROOMS

As the perfect solution for bulk storage, our cold rooms are designed to meet the needs of businesses ranging anywhere from professional kitchens to florists and retail stores. We offer a wide array of sizes and a flexible modular design, meaning you can easily customize the cold rooms to your available space.

Assembly is fast, as the panels are assembled with use of a simple interlocking system that requires no expert skills. Please be aware that the cold rooms in this catalogue are only examples – visit our website for the full selection.



Examples of Cold Rooms





DID YOU KNOW?

The shown sizes are only examples of the cold rooms TEFCOLD offers. See a complete size guide on the next page.

CRPF2430

Cold Room

- Plug-In ready after assembly
- Many customisation possibilities
- Easy access to products
- · Easy assembly
- Anti-slip floor in SS304 stainless steel
- 80 mm panel insulation
- · Shelves available as accessory
- Ramp available as accessory for easy access








Strong handle


Shelf as accessory

Description

The CRPF range of cold rooms can be used in both restaurants, delis, cafes etc. They are a great way to create optimal and efficient cooling space at a very affordable price. Cold rooms are a perfect and easy accessable way to store foods, dairy products and beverages.



 $\langle \mathbf{X} \rangle$



CRPF1212

Cold Room

- Plug-In ready after assembly
- Many customisation possibilities
- Easy access to products
- Easy assembly
- Anti-slip floor in SS304 stainless steel
- 80 mm panel insulation
- Shelves available as accessory
- Ramp available as accessory for easy access

CRPF1521

Cold Room



- Plug-In ready after assembly
- Many customisation possibilities
- Easy access to products
- Easy assembly
- Anti-slip floor in SS304 stainless steel
- 80 mm panel insulation
- Shelves available as accessory
- Ramp available as accessory for easy access

		CRPF1212	CRPF1521	CRPF1815	CRPF2121	CRPF2127	CRPF2130	CRPF2430	CRPF3030
Internal Volume	m³	2,2	5,3	4,48	7,68	10,05	11,24	12,98	16,45
Wall Thickness	mm	80	80	80	80	80	80	80	80
Insulation Density	kg/m³	42	42	42	42	42	42	42	42
Door No & Type		1 hinged solid							
Max Load on Floor	kg/m²	1500	1500	1500	1500	1500	1500	1500	1500
Temperature Range	°C	0 to +8							
Climate Class		5	5	5	5	5	5	5	5
Gross / Net Weight	kg	275 / 245	321 / 291	362 / 332	488 / 458	591 / 551	561 / 531	676 / 646	830 / 800
Gross / Net Volume	I								
Exterior Finish		White							
Interior Finish		White							
Interior Light		LED							
Lock		Yes							
Type of Controller		Electronic							
Type of Cooling		Ventilated							
Type of Defrost		Automatic, hot							
Refrigerant		R290							
Refrigerant Charge	g	130	130	130	150	170	170	170	200
Thermometer		Yes							
Max Ambient		40°C at 40% RH							
Energy Consumption	kWh/24h	17,93	18,72	17,93	21,12	23,4	23,4	23,4	25,92
Annual Energy Cons.	kWh/year	6545	6833	6545	7709	8541	8541	8541	9461
Power Supply		13 Amp							
Input Power	W	830	860	830	905	910	910	910	960
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	60	60	60	60	60	60	60	60
Internal Dimension (WxDxH)	mm	1040 x 1040 x	1340 x 1940 x	1640 x 1340 x	1940 x 1940 x	1940 x 2540 x	1940 x 2840 x	2240 x 2840 x	2840 x 2840 x
External Dimension (WxDxH)	mm	1200 x 1200 x	1500 x 2100 x	1800 x 1500 x	2100 x 2100 x	2100 x 2700 x	2100 x 3000 x	2400 x 3000 x	3000 x 3000 x
Packed Dimension (WxDxH)	mm	2000 x 1300 x	2200 x 1300 x	2200 x 1300 x	2200 x 1600 x	2200 x 1900 x	2200 x 1900 x	2500 x 1900 x	2500 x 1900 x
40ft Container Load	pcs	14	14	14	12	10	10	8	7

COLD ROOMS I 2



Overview of Cold Rooms



	120	150	180	210	240	270	300
120	92						
150	120	550	3				
180	8	150	9				
210	128	150	7.	216			
240	120	650	110	210	249		
270	120	150	100	216	349	276	
300	138	28	8	216	3245	8	2




Overview of Freezer Rooms



	120	150	180	210	240	270	300
120	3						
150	120 E	150	150				
180	120	001	180				
210	120 PK	159 6. 7	190	216			
240	7.	150	150	210	240		
270	120	150	180	219	240	270	
300	120	150	180	210	240	220	300

Examples of Freezer Rooms



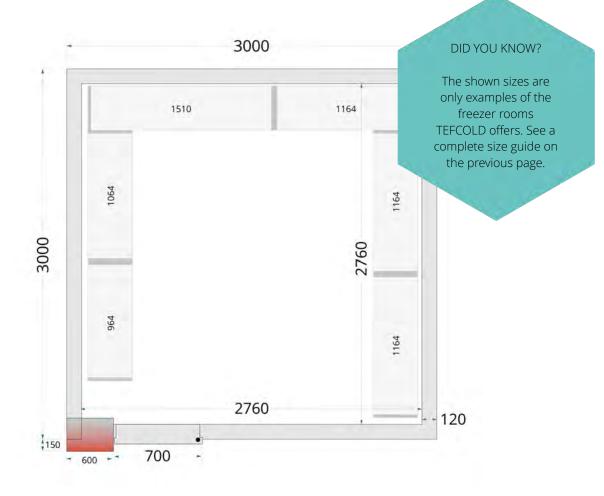

CRNF3030

Freezer room

- Plug-In ready after assembly
- Many customisation possibilities
- Easy access to products
- Freezing unit
- · Easy assembly
- 120 mm panel insulation
- Anti-slip floor in SS304 stainless steel
- Alarm kit as accessory
- Shelves available as accessory
- Ramp available as accessory for easy access









Strong handle

Shelf as accessory

Description


The CRNF range of freezer rooms can be used in both restaurants, delis, cafes, retail stores etc. They are a great way to create optimal and efficient freezing space at a very affordable price. The modular panel rooms are easy to assemble and come in many different sizes, so you can get a perfect fit for your business. Also available in a cooler version.





CRNF1827


Freezer room




- Many customisation possibilities
- Easy access to products
- Freezing unit
- · Easy assembly
- 120 mm panel insulation
- Anti-slip floor in SS304 stainless steel
- Alarm kit as accessory
- Shelves available as accessory
- Ramp available as accessory for easy access


CRNF1212

Freezer room





- Freezing unit
- Easy assembly
- 120 mm panel insulation
- Anti-slip floor in SS304 stainless steel
- · Alarm kit as accessory
- Ramp available as accessory for easy access



		CRNF1212	CRNF1221	CRNF1521	CRNF1827	CRNF2127	CRNF2130	CRNF2430	CRNF3030
Internal Volume	m³	1,81	3,5	4,59	7,52	8,97	10,06	11,68	14,93
Wall Thickness	mm	120	120	120	120	120	120	120	120
Insulation Density	kg/m³	42	42	42	42	42	42	42	42
Door No & Type		1 hinged solid							
Max Load on Floor	kg/m²	2000	2000	2000	2000	2000	2000	2000	2000
Temperature Range	°C	-20 to -10							
Climate Class		5	5	5	5	5	5	5	5
Gross / Net Weight	kg	310 / 280	430 / 400	368 / 338	685 / 655	750 / 720	760 / 730	825 / 795	865 / 835
Gross / Net Volume	I								
Exterior Finish		White							
nterior Finish		White							
nterior Light		LED							
_ock		Yes							
Type of Controller		Electronic							
Type of Cooling		Ventilated							
Type of Defrost		Automatic, hot	Automatic, ho						
Refrigerant		R290							
Refrigerant Charge	g	150	150	150	150	200	200	200	200
Thermometer		Yes							
Max Ambient		40°C at 40% RH	40°C at 40% R						
Energy Consumption	kWh/24h	22,49	22,49	22,49	27,02	29,52	31,78	31,78	31,78
Annual Energy Cons.	kWh/year	8208	8208	8208	9864	10775	11598	11598	11598
Power Supply		13 Amp							
nput Power	W	1100	1100	1100	1510	1394,73	1630	1630	1630
/oltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
loise Level	dB(A)	60	60	60	60	60	60	60	60
nternal Dimension (WxDxH)	mm	960 x 960 x	960 x 1860 x	1260 x 1860 x	1560 x 2460 x	1860 x 2460 x	1860 x 2760 x	2160 x 2760 x	2760 x 2760 x
External Dimension (WxDxH)	mm	1200 x 1200 x	1200 x 2100 x	1500 x 2100 x	1800 x 2700 x	2100 x 2700 x	2100 x 3000 x	2400 x 3000 x	3000 x 3000 x
Packed Dimension (WxDxH)	mm	2000 x 1350 x	2200 x 1320 x	2200 x 1600 x	2000 x 1900 x	2150 x 2750 x	2200 x 1900 x	2500 x 1600 x	2800 x 1600 x
40ft Container Load	pcs	14	14	10	6	6	6	4	3

FREEZER ROOMS





7 GASTRO Blast Chillers





DID YOU KNOW?

The BLCA-X range has pre-installed programs for different purposes, e.g. for hardening ice cream.


BLCA10X1

Blast Chiller/Freezer GN1/1

- Touch screen controller
- Programmable thermostat
- HACCP compliant data export
- Upload or download data via USB
- Guides for GN1/1 and Euronorm pans
- Stainless steel
- Core sensor included
- Reversible self-closing door
- Adjustable legs
- (Chill +70°C to +3°C) 40kg in 90 mins
- (Freeze +70°C to -18°C) 28kg in 240 mins









Touch screen controller

Description

The BLCA-X range of blast chillers are widely used in professional kitchens when food needs to be cooled rapidly and hygienically. Using blast chillers for chilling or freezing retains the colour, texture and taste of the food. Core temperature sensors included. Choose one of the pre-set programs or create your own on the easy-to-use touch screen controller. Available in different sizes, all made in high quality SS304 stainless steel and dimensioned for GN and Euronorm sizes.



BLCA3X1

Blast Chiller/Freezer GN1/1



- Touch screen controller
- Programmable thermostat
- HACCP compliant data export
- Upload or download data via USB
- Guides for GN1/1 and Euronorm pans
- Stainless steel
- Core sensor included
- Reversible self-closing door
- Adjustable legs

BLCA5X1



Blast Chiller/Freezer GN1/1

- Touch screen controller
- Programmable thermostat
- HACCP compliant data export
- Guides for GN1/1 and Euronorm pans
- Stainless steel
- Core sensor included
- Reversible self-closing door
- Adjustable legs
- (Chill +70°C to +3°C) 18kg in 90 mins
- (Freeze +70°C to -18°C) 14kg in 240 mins

		BLCA10X1	BLCA14X1	BLCA3X1	BLCA5X1
Capacity Cooling	kg	40	55	12	18
Capacity Freezing	kg	28	38	8	14
Capacity GN Pans	pcs	10	14	3 x GN1/1	5 x GN1/1
Door No & Type		1 hinged self-closing solid door			
Door Reversible		Yes	Yes	Yes	Yes
Temperature Range	°C	-30 to +70	-30 to +70	-30 to +70	-30 to +70
Climate Class		5	5	5	5
Gross / Net Weight	kg	190 / 150	266 / 210	130 / 104	149 / 116
Gross / Net Volume	1	368 / 192	494 / 264	139 / 60	169 / 91
Feet / Legs		4 adjustable feet	4 adjustable legs	4 adjustable feet	4 adjustable feet
Exterior Finish		SS304	SS304	SS304	SS304
Interior Finish		SS304	SS304	SS304	SS304
Interior Light		No	No	No	No
Lock		No	No	No	No
Type of Controller		Programmable Touchscreen	Programmable Touchscreen	Programmable Touchscreen	Programmable Touchscreen
Type of Cooling		Blast	Blast	Blast	Blast
Type of Defrost		Automatic, hot gas	Automatic, hot gas	Automatic, hot gas	Automatic, hot gas
Refrigerant		R290	R290	R290	R290
Refrigerant Charge	g	165	150	130	150
Input Power	W	900	2000	700	720
Voltage / Frequency	V/Hz	220-240/50	380-400/50	220-240/50	220-240/50
Noise Level	dB(A)	60	60	60	60
Internal Dimension (WxDxH)	mm	660 x 640 x 870	660 x 640 x 1170	660 x 640 x 330	660 x 640 x 400
External Dimension (WxDxH)	mm	804 x 815 x 1885	800 x 815 x 2110	804 x 826 x 995	804 x 826 x 1045
Packed Dimension (WxDxH)	mm	870 x 900 x 1730	830 x 845 x 2125	870 x 900 x 1030	870 x 900 x 1100
40ft Container Load	pcs	26	26	52	52


CT CHILLEDS 1 220



CW5/V Cooling Well GN1/1

- Stainless steel
- Electronic thermostat
- Accepts GN1/1 pan(s) (not supplied)
- Ventilated cooling





Designed for GN1/1 pans, not supplied



Ventilated cooling

Description

The CW range of cooling wells offers a safe way of showcasing delicious food in for example a buffet setting. The wells are robust and discrete looking with a classical gastro or HoReCa design in SS304 stainless steel. Easy to clean and easy to use. They are designed for standard gastronorm sizes, so your pans fit perfectly into the cooling well.





CW2/V

Cooling Well GN1/1


- Stainless steel
- Electronic thermostat
- Accepts GN1/1 pan(s) (not supplied)
- Ventilated cooling

CW3/V

(**X**

Cooling Well GN1/1





- Accepts GN1/1 pan(s) (not supplied)
- Ventilated cooling



		CW2/V	CW3/V	CW4/V	CW5/V
Capacity GN Pans	pcs	2	3	4	5
Number of dividers	pcs	3	4	5	6
Build In Dimension (WxD)	mm	765 x 665	1100 x 665	1435 x 665	1765 x 665
Temperature Range	°C	+2 to +8	+2 to +8	+2 to +8	+2 to +8
Climate Class		4	4	4	4
Gross / Net Weight	kg	46 / 38	52 / 42	58 / 46	64 / 50
Gross / Net Volume	I	107 / 64	161 / 96	213 / 127	266 / 159
Exterior Finish		SS304	SS304	SS304	SS304
Interior Finish		SS304	SS304	SS304	SS304
Type of Controller		Electronic	Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic	Automatic
Refrigerant		R290	R290	R290	R290
Refrigerant Charge	g	60	100	120	130
Thermometer		Yes	Yes	Yes	Yes
Energy Consumption	kWh/24h	3,66	3,84	4,56	4,56
Annual Energy Cons.	kWh/year	1336	1402	1664	1664
Input Power	W	122	122	235	235
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	42	42	42	42
Internal Dimension (WxDxH)	mm	676 x 508 x 186	1014 x 508 x 186	1344 x 508 x 186	1678 x 508 x 186
External Dimension (WxDxH)	mm	788 x 688 x 636	1122 x 688 x 636	1456 x 688 x 636	1790 x 688 x 636
Packed Dimension (WxDxH)	mm	842 x 760 x 742	1176 x 760 x 742	1510 x 760 x 742	1678 x 760 x 742
40ft Container Load	pcs	132	90	69	57

COOLING WELLS



CW5 Cooling Well GN1/1

- Stainless steel
- Accepts GN1/1 pan(s) (not supplied)
- Static cooling
- Electronic thermostat





Designed for GN1/1 pans, not supplied



Automatic evaporation of defrost water

Description

The CW range of cooling wells offers a safe way of showcasing delicious food in for example a buffet setting. The wells are robust and discrete looking with a classical gastro or HoReCa design in SS304 stainless steel. Easy to clean and easy to use. They are designed for standard gastronorm sizes, so your pans fit perfectly into the cooling well.





CW2

Cooling Well GN1/1

- Stainless steel
- Accepts GN1/1 pan(s) (not supplied)
- Static cooling
- Electronic thermostat



CW3

Cooling Well GN1/1



- Static cooling
- Electronic thermostat
- Accepts GN1/1 pan(s) (not supplied)



		CW2	CW3	CW4	CW5
Capacity GN Pans	pcs	2	3	4	5
Number of dividers	pcs	3	4	5	6
Build In Dimension (WxD)	mm	740 x 650	1075 x 650	1405 x 650	1740 x 650
Temperature Range	°C	+2 to +8	+2 to +8	+2 to +8	+2 to +8
Climate Class		4	4	4	4
Gross / Net Weight	kg	49 / 44	55 / 50	80 / 47	91 / 86
Gross / Net Volume	I	69 / 68	104 / 102	139 / 136	170 / 166
Exterior Finish		SS304	SS304	SS304	SS304
Interior Finish		SS304	SS304	SS304	SS304
Type of Controller		Electronic	Electronic	Electronic	Electronic
Type of Cooling		Static	Static	Static	Static
Type of Defrost		Automatic	Automatic	Automatic	Automatic
Refrigerant		R600a	R600a	R600a	R600a
Refrigerant Charge	g	70	70	135	135
Thermometer		Yes	Yes	Yes	Yes
Energy Consumption	kWh/24h	2,88	2,88	2,88	2,88
Annual Energy Cons.	kWh/year	1051	1051	1051	1051
Input Power	W	122	122	235	235
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	42	42	42	42
Internal Dimension (WxDxH)	mm	660 x 570 x 175	994 x 570 x 175	1326 x 570 x 175	1662 x 570 x 175
External Dimension (WxDxH)	mm	768 x 678 x 536	1102 x 678 x 536	1436 x 678 x 536	1770 x 678 x 536
Packed Dimension (WxDxH)	mm	820 x 730 x 680	1150 x 730 x 680	1490 x 730 x 680	1810 x 730 x 680
40ft Container Load	pcs	132	96	69	57

CK Counter Coolers with Doors



DID YOU KNOW?

The X1 models come with a controller with Bluetooth which allows for HACCP compliant data export.



CK7410X1SP

Counter Cooler GN1/1

- Stainless steel
- Ventilated cooling
- Controller with Bluetooth and NFC connectivity
- HACCP compliant data export
- Automatic defrost
- · Self-closing doors
- Adjustable legs









Drawers available as seperate kit

Description

The CK-X range of counter coolers in SS304 stainless steel is made for professional kitchens and therefore has GN1/1 dimensions. The counters are available in several sizes and you can choose between models with a tabletop with or without a splashback. They all have ventilated cooling to ensure an even and steady temperature. The controller has Bluetooth for easy monitoring via app.



CK7210X1

Counter Cooler GN1/1

- Stainless steel
- Ventilated cooling
- Controller with Bluetooth and NFC connectivity
- HACCP compliant data export
- Automatic defrost
- Self-closing doors
- Adjustable legs



CK7310X1

Counter Cooler GN1/1



- Stainless steel
- Ventilated cooling
- Controller with Bluetooth and NFC connectivity
- HACCP compliant data export
- Automatic defrost
- Self-closing doors
- Adjustable legs

		CK7210X1	CK7210X1SP	CK7310X1	CK7310X1SP	CK7410X1	CK7410X1SP
Door No & Type		2 hinged self-closing	2 hinged self-closing	3 hinged self-closing	3 hinged self-closing	4 hinged self-closing	4 hinged self-closin
Shelves No & Type		2 wire shelves grey	2 wire shelves grey	3 wire shelves grey	3 wire shelves grey	4 wire shelves grey	4 wire shelves grey
Shelf Color		Grey	Grey	Grey	Grey	Grey	Grey
Temperature Range	°C	-2 to +8	-2 to +8				
Climate Class		5	5	5	5	5	5
Gross / Net Weight	kg	113 / 98	122 / 112	151 / 134	162 / 152	173 / 153	184 / 174
Gross / Net Volume	1	238 / 190	238 / 190	368 / 291	368 / 291	616 / 393	616 / 393
Feet / Legs		4 adjustable legs	4 adjustable legs	4 adjustable feet	4 adjustable feet	6 adjustable legs	6 adjustable legs
Exterior Finish		SS304	SS304	SS304	SS304	SS304	SS304
Interior Finish		SS304	SS304	SS304	SS304	SS304	SS304
Lock		No	No	No	No	No	No
Type of Controller		Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
Refrigerant		R600a	R600a	R600a	R600a	R600a	R600a
Refrigerant Charge	g	95	95	95	95	95	95
Thermometer		Yes	Yes	Yes	Yes	Yes	Yes
Energy Class		Α	Α	A	Α	Α	Α
Energy Consumption	kWh/24h	1,03	1,03	1,42	1,42	1,82	1,82
Annual Energy Cons.	kWh/year	376	376	518	518	664	664
Input Power	W	300	300	300	300	300	300
Voltage / Frequency	V/Hz	220-240/50-60	220-240/50	220-240/50	220-240/50-60	220-240/50	220-240/50
Noise Level	dB(A)	38	38	38	38	38	38
nternal Dimension (WxDxH)	mm	799 x 580 x 564	799 x 580 x 564	1234 x 580 x 564	1234 x 580 x 564	1669 x 580 x 564	1669 x 580 x 564
External Dimension (WxDxH)	mm	1360 x 700 x 860	1360 x 700 x 960	1795 x 700 x 860	1795 x 700 x 960	2230 x 700 x 860	2230 x 700 x 960
Packed Dimension (WxDxH)	mm	1390 x 730 x 910	1390 x 730 x 1010	1825 x 730 x 910	1825 x 730 x 1010	2260 x 730 x 910	2260 x 730 x 1010
40ft Container Load	pcs	48	48	38	38	32	32

COUNTERS I 236

CK Counter Coolers with Drawers



CK7360Counter Cooler GN1/1

- Stainless steel
- Automatic defrost
- Removable table top with splashback
- GN1/1 Drawers
- Adjustable shelf GN 1/1
- Adjustable legs
- Ventilated cooling









Strong castors as option

Description

The CK range of counter coolers in SS304 stainless steel is made for professional kitchens and therefore has GN1/1 dimensions. The counters are available in several sizes and you can choose between solid doors, glass doors, or drawers. You furthermore have the choice between models with a removable tabletop with or without a splashback. They all have ventilated cooling to ensure an even and steady temperature.





CK7240

Counter Cooler GN1/1

- Stainless steel
- Automatic defrost
- Removable table top with splashback
- Adjustable legs
- GN1/1 Drawers
- Ventilated cooling

CK7220

B A···

Counter Cooler GN1/1



- Stainless steel
- Automatic defrost
- Removable table top with splashback
- Digital controller and temperature display
- Adjustable legs
- GN1/1 Drawers
- Ventilated cooling

		CV7220	CK7240	CV7240	CK7360
		CK7220	CK/240	CK7340	CK/360
Door No & Type		1 hinged self-closing doors		1 hinged self-closing doors	
Shelves No & Type		1 wire shelves white	-	1	-
Shelf Color		White	White	White	White
Shelf Dimensions		GN1/1	-	GN1/1	-
Drawers	pcs	2 GN1/1 drawers	4 GN1/1 drawers	4 GN1/1 drawers	6 GN1/1 drawers
Temperature Range	°C	-2 to +10	-2 to +10	-2 to +10	-2 to +10
Climate Class		4	4	4	4
Gross / Net Weight	kg	122 / 112	122 / 112	162 / 152	162 / 152
Gross / Net Volume	1	282 / 272	282 / 272	417 / 402	417 / 402
Feet / Legs		4 adjustable legs	4 adjustable legs	4 adjustable feet	4 adjustable feet
Exterior Finish		SS304	SS304	SS304	SS304
Interior Finish		SS304	SS304	SS304	SS304
Type of Controller		Electronic	Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic	Automatic
Refrigerant		R600a	R600a	R600a	R600a
Refrigerant Charge	g	95	95	95	95
Thermometer		Yes	Yes	Yes	Yes
Energy Class		В	В	В	В
Energy Consumption	kWh/24h	1,98	1,98	2,45	2,45
Annual Energy Cons.	kWh/year	723	723	894	894
Input Power	W	300	300	300	300
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	42	42	42	42
Internal Dimension (WxDxH)	mm	902 x 530 x 589	902 x 530 x 589	1337 x 530 x 589	1337 x 530 x 589
External Dimension (WxDxH)	mm	1360 x 700 x 960	1360 x 700 x 960	1795 x 700 x 960	1795 x 700 x 960
Packed Dimension (WxDxH)	mm	1390 x 730 x 1010	1390 x 730 x 1010	1825 x 730 x 1010	1825 x 730 x 1010
40ft Container Load	pcs	48	48	38	38

COUNTERS I 238

CK Counter Coolers with Glass



CK7410GCounter Cooler GN1/1

- New design
- Stainless steel
- Automatic defrost
- Self-closing glass doors
- Removable table top
- · Adjustable legs
- Ventilated cooling





Aluminium door frames and LED light



Strong castors as option

Description

The CK range of counter coolers in SS304 stainless steel is made for professional kitchens and therefore has GN1/1 dimensions. The counters are available in several sizes and you can choose between solid doors, glass doors, or drawers. You furthermore have the choice between models with a removable tabletop with or without a splashback. They all have ventilated cooling to ensure an even and steady temperature.





CK7310G

Counter Cooler GN1/1

- New design
- Stainless steel
- Automatic defrost
- Self-closing glass doors
- Removable table top
- Adjustable legs
- Ventilated cooling



CGG

Counter Cooler GN1/1



- Stainless steel
- Automatic defrost
- Self-closing glass doors
- Removable table top
- Adjustable legs
- Ventilated cooling



B A

	_		_	
		CK7210G	CK7310G	CK7410G
Door No & Type		2 hinged self-closing glass doors	3 hinged self-closing glass doors	4 hinged self-closing glass doors
Shelves No & Type		2 wire shelves white	3 wire shelves white	4 wire shelves white
Shelf Color		White	White	White
Shelf Dimensions		GN1/1	GN1/1	GN1/1
Temperature Range	°C	+2 to +10	+2 to +10	+2 to +10
Climate Class		4	4	4
Gross / Net Weight	kg	122 / 112	162 / 152	184 / 174
Gross / Net Volume	1	282 / 272	417 / 402	553 / 533
Feet / Legs		4 adjustable legs	4 adjustable feet	6 adjustable legs
Exterior Finish		SS304	SS304	SS304
Interior Finish		SS304	SS304	SS304
Interior Light		LED	LED	LED
Type of Controller		Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic
Refrigerant		R600a	R600a	R600a
Refrigerant Charge	g	95	95	250
Thermometer		Yes	Yes	Yes
Energy Class		В	С	C
Energy Consumption	kWh/24h	2,04	3,13	3,97
Annual Energy Cons.	kWh/year	745	1141	1448
Input Power	W	300	300	300
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	42	42	42
Internal Dimension (WxDxH)	mm	902 x 530 x 589	1337 x 530 x 589	1772 x 530 x 589
External Dimension (WxDxH)	mm	1360 x 700 x 880	1795 x 700 x 880	2230 x 700 x 880
Packed Dimension (WxDxH)	mm	1405 x 750 x 900	1830 x 750 x 900	2260 x 750 x 900
40ft Container Load	pcs	48	38	38



CF7410 Counter Freezer GN1/1

- New design
- Stainless steel
- Ventilated cooling
- Automatic defrost
- Self-closing doors
- Removable table top with splashback
- · Adjustable legs









Available without splash back

Description

The CF range of counter freezers in SS304 stainless steel is made for professional kitchens and therefore has GN1/1 dimensions. The counters are available in several sizes from 2-4 doors. You can choose between models with a removable tabletop with or without a splashback. They all have ventilated cooling to ensure an even and steady temperature.





CF7310

Counter Freezer GN1/1

- New design
- Stainless steel
- Ventilated cooling
- Automatic defrost
- Self-closing doors
- Removable table top with splashback
- Adjustable legs

CF7210/-SP

D G

Counter Freezer GN1/1



- Stainless steel
- Automatic defrost
- Self-closing doors
- Adjustable legs
- Ventilated cooling





,	_						
		CF7210	CF7210/-SP	CF7310	CF7310/-SP	CF7410	CF7410/-SP
Door No & Type		2 hinged self-closing	2 hinged self-closing	3 hinged self-closing	3 hinged self-closing	4 hinged self-closing	4 hinged self-closin
Shelves No & Type		2 wire shelves white	2 wire shelves white	3 wire shelves white	3 wire shelves white	4 wire shelves white	4 wire shelves whit
Shelf Color		White	White	White	White	White	White
Shelf Dimensions		GN1/1	GN1/1	GN1/1	GN1/1	GN1/1	GN1/1
Temperature Range	°C	-20 to -10	-20 to -10				
Climate Class		4	4	4	4	4	4
Gross / Net Weight	kg	118 / 103	118 / 103	162 / 152	162 / 152	199 / 189	199 / 189
Gross / Net Volume	I	282 / 272	282 / 272	417 / 402	417 / 402	553 / 533	553 / 533
Feet / Legs		4 adjustable legs	4 adjustable legs	4 adjustable legs	4 adjustable legs	6 adjustable legs	6 adjustable legs
Exterior Finish		SS304	SS304	SS304	SS304	SS304	SS304
Interior Finish		SS304	SS304	SS304	SS304	SS304	SS304
Type of Controller		Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
Refrigerant		R290	R290	R290	R290	R290	R290
Refrigerant Charge	g	90	90	90	90	230	230
Thermometer		Yes	Yes	Yes	Yes	Yes	Yes
Energy Class		D	D	D	D	D	D
Energy Consumption	kWh/24h	6,95	6,95	8,76	8,76	10,26	10,26
Annual Energy Cons.	kWh/year	2537	2537	3197	3197	3745	3745
Input Power	W	470	470	570	570	660	660
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	42	42	42	42	42	42
Internal Dimension (WxDxl	l) mm	902 x 530 x 589	902 x 530 x 589	1337 x 530 x 589	1337 x 530 x 589	1772 x 530 x 589	1772 x 530 x 589
External Dimension (WxDx	H) mm	1360 x 700 x 980	1360 x 700 x 880	1795 x 700 x 980	1795 x 700 x 880	2230 x 700 x 980	2230 x 700 x 880
Packed Dimension (WxDxH) mm	1405 x 750 x 1010	1405 x 750 x 920	1830 x 750 x 1010	1830 x 750 x 920	2260 x 750 x 1010	2260 x 750 x 1010
40ft Container Load	pcs	48	48	38	38	32	32

SK Snack Counter Cooler



SK6410 Snack Counter Cooler

- New design
- Stainless steel
- Ventilated cooling
- Automatic defrost
- Self-closing doors
- Removable table top
- Adjustable legs





Easy access to clean dust filter



Drawers available as seperate kit

Description

The SK range of snack counter coolers is made in SS304 stainless steel. The term "snack" is used for gastro products, which do not have gastronorm dimensions. The snack counters have a depth of only 600 mm which makes them ideal for kitchens with limited space. Available in several sizes from 2-4 doors and in models with a removable tabletop with or without a splashback. They all have ventilated cooling to ensure an even and steady temperature. Also available in a freezer option (SK-BT range)



B A***



SK6210/+SP

Snack Counter Cooler

- New design
- Stainless steel
- Ventilated cooling
- Automatic defrost
- Self-closing doors
- Removable table top with splashback
- Adjustable legs

SK6310/+SP

Snack Counter Cooler



- Stainless steel
- Ventilated cooling
- Automatic defrost
- Self-closing doors
- Removable table top with splashback
- Adjustable legs



B † G

/ tajastasie regs	, legastasie legs						
		SK6210	SK6210/+SP	SK6310	SK6310/+SP	SK6410	SK6410/+SP
Door No & Type		2 hinged self-closing	2 hinged self-closing	3 hinged self-closing	3 hinged self-closing	4 hinged self-closing	4 hinged self-closing
Shelves No & Type		2 wire shelves white	2 wire shelves white	3 wire shelves white	3 wire shelves white	4 wire shelves white	4 wire shelves white
Shelf Color		White	White	White	White	White	White
Shelf Dimensions		328 x 430 mm					
Temperature Range	°C	-2 to +10					
Climate Class		4	4	4	4	4	4
Gross / Net Weight	kg	104 / 94	104 / 94	130 / 120	130 / 120	154 / 144	154 / 144
Gross / Net Volume	1	240 / 230	240 / 230	360 / 345	360 / 345	480 / 460	480 / 460
Feet / Legs		4 adjustable legs	4 adjustable legs	4 adjustable legs	4 adjustable legs	6 adjustable legs	6 adjustable legs
Exterior Finish		SS304	SS304	SS304	SS304	SS304	SS304
Interior Finish		SS304	SS304	SS304	SS304	SS304	SS304
Type of Controller		Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
Refrigerant		R600a	R600a	R600a	R600a	R600a	R600a
Refrigerant Charge	g	95	95	95	95	95	95
Thermometer		Yes	Yes	Yes	Yes	Yes	Yes
Energy Class		В	В	В	В	С	С
Max Ambient		30°C at 55% RH					
Energy Consumption	kWh/24h	1,96	1,96	2,25	2,25	3,83	3,83
Annual Energy Cons.	kWh/year	715	715	821	821	1398	1398
Power Supply		13 Amp					
Input Power	W	300	300	300	300	300	300
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	42	42	42	42	42	42
Internal Dimension (WxDxH)	mm	902 x 430 x 589	902 x 430 x 589	1337 x 430 x 589	1337 x 430 x 589	1772 x 430 x 589	1772 x 430 x 589
External Dimension (WxDxH)	mm	1360 x 600 x 880	1360 x 600 x 925	1795 x 600 x 880	1795 x 600 x 925	2230 x 600 x 880	2230 x 600 x 925
Packed Dimension (WxDxH)	mm	1400 x 640 x 920	1400 x 640 x 1020	1830 x 640 x 920	1830 x 640 x 1020	2250 x 640 x 920	2250 x 640 x 1020
40ft Container Load	pcs	52	52	38	38	36	36

GASTRO SK Snack Counter Freezer






SK6410BTSnack Counter Freezer

- · New design
- Stainless steel
- Ventilated cooling
- Automatic defrost
- · Self-closing doors
- · Adjustable legs









Available with splash back

Description

The SK-BT range of snack counter freezers is made in SS304 stainless steel. The term "snack" is used for gastro products, which do not have gastronorm dimensions. The snack counters have a depth of only 600 mm which makes them ideal for kitchens with limited space. Available in several sizes from 2-4 doors and in models with a removable tabletop with or without a splashback. They all have ventilated cooling to ensure an even and steady temperature. Also available in a cooler option (SK range).





SK6310BT/+ SP

Snack Counter Freezer

- New design
- Stainless steel
- Ventilated cooling
- Automatic defrost
- · Self-closing doors
- Removable table top with splashback
- Adjustable legs

SK6210BT/+ SP

Snack Counter Freezer



- · Stainless steel
- · Ventilated cooling
- Automatic defrost
- · Self-closing doors
- Removable table top with splashback
- Adjustable legs








BK310

Bakery Counter

- New design
- Stainless steel
- Euronorm cupboard
- Ventilated cooling
- Automatic defrost
- Removable table top
- Self-closing doors
- · Adjustable legs









Drawers available as seperate kit

Description

The BK range of bakery coolers is made specifically for bakeries and therefore have euronorm dimensions with guides for bakery trays. The range includes counters as well as upright coolers. It is made from high quality catering grade SS304 stainless steel. A ventilated cooling system ensures that the ingredients stay fresh, and the temperature is easily controlled by a digital thermostat.



DID YOU KNOW?

With a customer login to our web shop, you can see your agreed prices and warranties, stock levels, product specifications, and drawings.

BK210

Bakery Counter

- New design
- Stainless steel
- Euronorm cupboard
- Automatic defrost
- Self-closing doors
- Removable table top
- Adjustable legs
- Ventilated cooling

		BK210	BK310
Door No & Type		2 hinged self-closing doors	3 hinged self-closing doors
Shelves No & Type		2 wire shelves white	3 wire shelves white
Shelf Color		White	White
Shelf Dimensions		400 x 600 mm	400 x 600 mm
Temperature Range	°C	+2 to +10	+2 to +10
Climate Class		4	4
Gross / Net Weight	kg	131 / 121	170 / 152
Gross / Net Volume	1	390 / 380	580 / 565
Feet / Legs		4 adjustable legs	6 adjustable legs
Exterior Finish		SS304	SS304
Interior Finish		SS304	SS304
Type of Controller		Electronic	Electronic
Type of Cooling		Ventilated	Ventilated
Type of Defrost		Automatic	Automatic
Refrigerant		R600a	R600a
Refrigerant Charge	g	95	95
Thermometer		Yes	Yes
Energy Class		В	C
Energy Consumption	kWh/24h	1,94	3,65
Annual Energy Cons.	kWh/year	708	1332
Input Power	W	300	300
Voltage / Frequency	V/Hz	220-240/50	220-240/50
Noise Level	dB(A)	42	42
Internal Dimension (WxDxH)	mm	1052 x 630 x 589	1562 x 630 x 589
External Dimension (WxDxH)	mm	1510 x 800 x 880	2020 x 800 x 880
Packed Dimension (WxDxH)	mm	1550 x 840 x 920	2050 x 840 x 920
40ft Container Load	pcs	30	28

COUNTERS I 248




PT930

Pizza Counter GN1/1

- Stainless steel
- Granite worktop
- Cooling well for GN1/6 pans
- Automatic defrost
- Doors
- Adjustable feet
- Fan assisted cooling









Drawers as option

Description

The PT range of pizza tables is made in SS304 stainless steel. It has a granite tabletop, which is ideal for creating pizzas, as the granite stays cool and makes it harder for the dough to stick to the tabletop. It is available in several sizes with 2- or 3 doors. It is also possible to get it customized with drawers. Comes with or without a topping unit for GN pans – topping units can also be retrofitted.





PT1365

Pizza Counter GN1/1

- Stainless steel
- Granite worktop
- Automatic defrost
- Doors
- Adjustable feet
- Fan assisted cooling



PT920

Pizza Counter GN1/1



- Stainless steel
- Granite worktop
- Cooling well for GN1/6 pans
- Automatic defrost
- Doors
- Adjustable feet
- Fan assisted cooling

		PT1365	PT920	PT930
Door No & Type		3 hinged solid doors	2 hinged solid doors	3 hinged solid doors
Shelves No & Type		3 wire shelves white	2 wire shelves white	3 wire shelves white
Shelf Color		White	White	White
Shelf Dimensions		GN1/1	GN1/1	GN1/1
Temperature Range	°C	+2 to +10	+2 to +10	+2 to +10
Climate Class		4	4	4
Gross / Net Weight	kg	190 / 170	113 / 103	166 / 156
Gross / Net Volume	I	400 / 368	260 / 225	400 / 368
Feet / Legs		4 adjustable feet	4 adjustable feet	4 adjustable feet
Exterior Finish		SS304	SS304	SS304
Interior Finish		SS304	SS304	SS304
Type of Controller		Electronic	Electronic	Electronic
Type of Cooling		Fan assisted	Fan assisted	Fan assisted
Type of Defrost		Automatic	Automatic	Automatic
Refrigerant		R600a	R600a	R600a
Refrigerant Charge	g	110	68	110
Thermometer		Yes	Yes	Yes
Energy Class		С		
Energy Consumption	kWh/24h	3,15	2,2	2,4
Annual Energy Cons.	kWh/year	1150	803	876
Input Power	W	175	155	175
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	42	42	42
Internal Dimension (WxDxH)	mm	1295 x 515 x 500	830 x 515 x 526	1295 x 515 x 500
External Dimension (WxDxH)	mm	1365 x 700 x 1011	900 x 700 x 1100	1365 x 700 x 1100
Packed Dimension (WxDxH)	mm	1440 x 770 x 1200	980 x 770 x 1250	1440 x 770 x 1250
40ft Container Load	pcs	48	72	48

COUNTERS I 250



PT1310 Pizza Table



- New design
- Stainless steel
- Ambient temperature drawers section
- Guides for 7 pizza trays in each door (400x600 mm)
- Granite worktop
- Ventilated cooling
- Automatic defrost
- Self-closing doors







Granite table top

Guides for pizza trays

Description

The PT range of pizza tables is made in SS304 stainless steel. It has a granite tabletop, which is ideal for creating pizzas, as the granite stays cool and makes it harder for the dough to stick to the tabletop. It is available in several sizes with 2- or 3 doors. It is also possible to get it customized with drawers. Comes with or without a topping unit for GN pans – topping units can also be retrofitted.





PT1200

Pizza Table

- New design
- Stainless steel
- Guides for 7 pizza trays in each door (400x600 mm)

B A...

- Granite worktop
- Automatic defrost
- Self-closing doors
- Ventilated cooling

PT1300

Pizza Table

- New design
- Stainless steel
- Guides for 7 pizza trays in each door (400x600 mm)

C G

- Granite worktop
- Ventilated cooling
- Automatic defrost
- Self-closing doors
- Adjustable legs



			rajustuble legs	
		PT1200	PT1300	PT1310
Door No & Type		2 hinged self-closing doors	3 hinged self-closing doors	2 hinged self-closing doors
Shelves No & Type		14 guides for pizza trays	21 guides for pizza trays	14 guides for pizza trays
Shelf Dimensions		400 x 600 mm	400 x 600 mm	400 x 600 mm
Drawers	pcs			7 dough drawers
Temperature Range	°C	+2 to +10	+2 to +10	+2 to +10
Climate Class		4	4	4
Gross / Net Weight	kg	253 / 243	328 / 318	330 / 320
Gross / Net Volume	I	390 / 370	580 / 565	390 / 370
Feet / Legs		4 adjustable legs	6 adjustable legs	8 adjustable legs
Exterior Finish		SS304	SS304	SS304
Interior Finish		SS304	SS304	SS304
Type of Controller		Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic
Refrigerant		R600a	R600a	R600a
Refrigerant Charge	g	95	95	95
Thermometer		Yes	Yes	Yes
Energy Class		В	С	В
Max Ambient		30°C at 55% RH	30°C at 55% RH	30°C at 55% RH
Energy Consumption	kWh/24h	2,32	3,65	2,41
Annual Energy Cons.	kWh/year	847	1332	880
Power Supply			13 Amp	13 Amp
Input Power	W	300	300	300
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	42	42	42
Internal Dimension (WxDxH)	mm	1052 x 630 x 589	1562 x 630 x 589	1052 x 630 x 589
External Dimension (WxDxH)	mm	1510 x 800 x 1000	2045 x 800 x 1000	2045 x 800 x 1000
Packed Dimension (WxDxH)	mm	1550 x 840 x 1050	2050 x 840 x 1050	2050 x 840 x 1050
40ft Container Load	pcs	28	28	28



SA910Saladette Counter GN1/1



- Digital controller and temperature display
- Automatic defrost
- · Adjustable feet
- · Fan assisted cooling









Drawers as option

Description

The SA range of saladette counters is perfect for busy kitchen environments with GN1/1 gastronorm dimensioned cupboards and adjustable shelves. If preferred, it is also possible to install gastronorm drawers. The counters are available in various sizes, with a countertop or an open top suitable for GN pans.





SA910BT

Saladette Freezer Counter GN1/1



- Freezing unit
- Stainless steel
- Digital controller and temperature display
- Adjustable feet
- Fan assisted cooling

SA912

Saladette Counter GN1/1



- Stainless steel
- Automatic defrost
- Adjustable feet
- Fan assisted cooling

		SA910	SA910BT	SA912	SA914
Door No & Type		2 hinged solid doors	2 hinged solid doors	1 hinged solid door	
Shelves No & Type		2 wire shelves white	2 wire shelves white	1 wire shelves white	-
Shelf Color		White	White	White	-
Shelf Dimensions		GN1/1	GN1/1	GN1/1	-
Max load on Shelves	kg/m²	110	110	110	
Drawers	pcs	0	0	2 GN1/1 drawers	4 GN1/1 drawers
Temperature Range	°C	+2 to +10	-20 to -10	+2 to +10	+2 to +10
Climate Class		4	4	4	4
Gross / Net Weight	kg	80 / 70	96 / 86	80 / 70	80 / 70
Gross / Net Volume	I	260 / 230	260 / 230	260 / 230	260 / 230
Feet / Legs		4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Exterior Finish		SS304	SS304	SS304	SS304
Interior Finish		SS304	SS304	SS304	SS304
Type of Controller		Electronic	Electronic	Electronic	Electronic
Type of Cooling		Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost		Automatic	Manual	Automatic	Automatic
Refrigerant		R600a	R290	R600a	R600a
Refrigerant Charge	g	68	90	68	68
Thermometer		Yes	Yes	Yes	Yes
Energy Class		C	E	C	С
Energy Consumption	kWh/24h	3,12	6,95	2,81	2,85
Annual Energy Cons.	kWh/year	1139	2537	1026	1040
Power Supply			13 Amp	13 Amp	
Input Power	W	155	280	155	155
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	42	42	42	42
Internal Dimension (WxDxH)	mm	830 x 515 x 500	830 x 515 x 500	830 x 515 x 500	830 x 515 x 500
External Dimension (WxDxH)	mm	900 x 700 x 877	943 x 700 x 877	900 x 700 x 877	900 x 700 x 877
Packed Dimension (WxDxH)	mm	980 x 770 x 1040	980 x 770 x 1040	980 x 770 x 1040	980 x 770 x 1040
40ft Container Load	pcs	72	72	72	72

COUNTERS I 254



SA1365Saladette Counter GN1/1

- Stainless steel
- Open top for GN pans
- Automatic defrost
- · Adjustable feet
- · Fan assisted cooling
- Chopping board







GN1/1 shelves

Glass top as option

Description

The SA range of saladette counters is perfect for busy kitchen environments with GN1/1 gastronorm dimensioned cupboards and adjustable shelves. If preferred, it is also possible to install gastronorm drawers. The counters are available in various sizes, with a countertop or an open top suitable for GN pans. The models with an open top for GN pans are available with or without a glass top.





SA1365 S/S

Saladette Counter GN1/1

- Stainless steel
- Digital controller and temperature display
- Automatic defrost
- Adjustable feet
- Fan assisted cooling

SA920

C G

Saladette Counter GN1/1



- Stainless steel
- Open top for GN pans
- Digital controller and temperature display
- Automatic defrost
- Adjustable feet
- Fan assisted cooling
- Chopping board

		SA1045	SA1365	SA1365 S/S	SA920
Door No & Type		2 hinged solid doors	3 hinged solid doors	3 hinged solid doors	2 hinged solid doors
Shelves No & Type		2 wire shelves white	3 wire shelves white	3 wire shelves white	2 wire shelves white
Shelf Color		White	White	White	White
Shelf Dimensions		GN1/1	GN1/1	GN1/1	GN1/1
Max load on Shelves	kg/m²	110	110	110	110
Temperature Range	°C	+2 to +10	+2 to +10	+2 to +10	+2 to +10
Climate Class		4	4	4	4
Gross / Net Weight	kg	85 / 75	120 / 110	120 / 110	80 / 70
Gross / Net Volume	I	270 / 240	400 / 368	400 / 368	260 / 230
Feet / Legs		4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Exterior Finish		SS304	SS304	SS304	SS304
Interior Finish		SS304	SS304	SS304	SS304
Type of Controller		Electronic	Electronic	Electronic	Electronic
Type of Cooling		Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost		Automatic	Automatic	Automatic	Automatic
Refrigerant		R600a	R600a	R600a	R600a
Refrigerant Charge	g	68	110	110	68
Thermometer		Yes	Yes	Yes	Yes
Energy Class				С	
Energy Consumption	kWh/24h	2,5	3,15	3,15	2,1
Annual Energy Cons.	kWh/year	913	1150	1150	767
Input Power	W	175	235	235	155
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	42	42	42	42
Internal Dimension (WxDxH)	mm	975 x 515 x 500	1295 x 515 x 500	1295 x 515 x 500	830 x 515 x 500
External Dimension (WxDxH)	mm	1045 x 700 x 877	1365 x 700 x 877	1365 x 700 x 877	900 x 700 x 877
Packed Dimension (WxDxH)	mm	1120 x 770 x 1040	1440 x 770 x 1040	1440 x 770 x 1040	980 x 770 x 1040
40ft Container Load	pcs	72	48	48	72

COUNTERS I 256

SS Sandwich Preparation Counters




SS8300

Sandwich Preparation Counter

- New design
- Stainless steel
- Cooling well for GN1/3 pans
- Ventilated cooling
- Optimized airflow for stable temperature
- Automatic defrost
- · Self-closing doors
- · Adjustable legs









Electronic thermostat

Description

The SS range of sandwich preparation counters is made in SS304 stainless steel and is a great choice for professional kitchens. Here you have everything you need within reach. The cooling well is suitable for GN pans and the cabinets provide easy access for refill. The counters are available in several sizes with 2 or 3 doors.





SS7200

Sandwich Preparation Counter GN1/1



- Stainless steel
- Cooling well for GN1/3 pans
- Ventilated cooling
- Optimized airflow for stable temperature
- Automatic defrost
- Self-closing doors
- Adjustable legs

SS7300

Sandwich Preparation Counter GN1/1



- New design
- Stainless steel
- Cooling well for GN1/3 pans
- Ventilated cooling
- Optimized airflow for stable temperature
- Automatic defrost
- Self-closing doors
- Adjustable legs

,							
		SS7200	SS7300	SS8200	SS8300		
Door No & Type		2 hinged self-closing doors	3 hinged self-closing doors	2 hinged self-closing doors	3 hinged self-closing doors		
Shelves No & Type		2 wire shelves white	3 wire shelves white	2 wire shelves white	3 wire shelves white		
Shelf Color		White	White	White	White		
Shelf Dimensions		GN1/1	GN1/1	400 x 600 mm	400 x 600 mm		
Temperature Range	°C	+2 to +10	+2 to +10	+2 to +10	+2 to +10		
Climate Class		4	4	4	4		
Gross / Net Weight	kg	140 / 130	173 / 163	163 / 153	201 / 191		
Gross / Net Volume	1	320 / 297	429 / 407	362 / 337	520 / 497		
Feet / Legs		4 adjustable legs	4 adjustable legs	4 adjustable legs	6 adjustable legs		
Exterior Finish		SS304	SS304	SS304	SS304		
Interior Finish		SS304	SS304	SS304	SS304		
Type of Controller		Electronic	Electronic	Electronic	Electronic		
Type of Cooling		Ventilated	Ventilated	Ventilated	Ventilated		
Type of Defrost		Automatic	Automatic	Automatic	Automatic		
Refrigerant		R290	R290	R290	R290		
Refrigerant Charge	g	95	95	95	95		
Thermometer		Yes	Yes	Yes	Yes		
Energy Consumption	kWh/24h	2,7	2,8	2,8	3,2		
Annual Energy Cons.	kWh/year	986	1022	1022	1168		
Input Power	W	300	300	300	300		
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50		
Noise Level	dB(A)	42	42	42	42		
Internal Dimension (WxDxH)	mm	902 x 530 x 589	1337 x 530 x 589	1052 x 630 x 589	1562 x 630 x 589		
External Dimension (WxDxH)	mm	1360 x 700 x 1080	1795 x 700 x 1080	1510 x 800 x 1080	2020 x 800 x 1080		
Packed Dimension (WxDxH)	mm	1405 x 750 x 1010	1830 x 750 x 1010	1550 x 840 x 1150	2050 x 840 x 1150		
40ft Container Load	pcs	48	38	30	28		

OUNTERS I 258

SS Sandwich Preparation Counters



SS1435

Sandwich Preparation Counter GN1/1



- Cooling well for GN1/6 pans
- Automatic defrost
- Doors
- · Adjustable legs
- · Fan assisted cooling







GN1/6 cooling well

Drawers as option

Description

The SS range of sandwich preparation counters is made in SS304 stainless steel and is a great choice for professional kitchens. Here you have everything you need within reach. The cooling well is suitable for GN pans and the cabinets provide easy access for refill. The counters are available in several sizes with 2 or 3 doors.



SS920

Sandwich Preparation Counter GN1/1



- Stainless steel
- Cooling well for GN1/6 pans
- Automatic defrost
- Doors
- Adjustable legs
- Fan assisted cooling

		SS1435	SS920
Door No & Type		3 hinged solid doors	2 hinged solid doors
Shelves No & Type		3 wire shelves white	2 wire shelves white
Shelf Color		White	White
Shelf Dimensions		GN1/1	GN1/1
Temperature Range	°C	+2 to +10	+2 to +10
Climate Class		4	4
Gross / Net Weight	kg	128 / 118	90 / 80
Gross / Net Volume	I	348 / 320	228 / 201
Feet / Legs		4 adjustable feet	4 adjustable feet
Exterior Finish		SS304	SS304
Interior Finish		SS304	SS304
Type of Controller		Electronic	Electronic
Type of Cooling		Fan assisted	Fan assisted
Type of Defrost		Automatic	Automatic
Refrigerant		R600a	R600a
Refrigerant Charge	g	110	68
Thermometer		Yes	Yes
Energy Consumption	kWh/24h	2,4	2
Annual Energy Cons.	kWh/year	876	730
Input Power	W	175	155
Voltage / Frequency	V/Hz	220-240/50	220-240/50
Noise Level	dB(A)	42	42
Internal Dimension (WxDxH)	mm	1295 x 515 x 500	830 x 515 x 500
External Dimension (WxDxH)	mm	1365 x 700 x 950	900 x 700 x 950
Packed Dimension (WxDxH)	mm	1400 x 770 x 1170	980 x 770 x 1170
40ft Container Load	pcs	48	72

COUNTERS I 260

GVC33 Vitrine Coolers - Glass Top




GVC33-200 Vitrine Cooler GN1/4



- Stairliess steel
- Glass structure for protection of food
- Accepts GN1/4 pan(s) (not supplied)
- Digital controller and temperature display
- Static cooling
- · Adjustable feet









Accepts GN1/4 pan(s) (not supplied)

Description

The GVC range of vitrine coolers is a great addition to gastro counters, as it enables you to have everything you need for food preparation within reach. It accepts GN1/4 and GN1/6 pans (not included). The cooler is made in SS201 stainless steel with a glass sneezeguard to protect the food. Ideal for pizza places, fast food restaurants, and sandwich shops.



(**X**)



GVC33-120

Vitrine Cooler GN1/4

- Stainless steel
- Glass structure for protection of food
- Accepts GN1/4 pan(s) (not supplied)
- Digital controller and temperature display
- Static cooling
- Adjustable feet

GVC33-160

Vitrine Cooler GN1/4



- Stainless steel
- Glass structure for protection of food
- Accepts GN1/4 pan(s) (not supplied)
- Digital controller and temperature display
- Static cooling
- Adjustable feet


		GVC33-120	GVC33-140	GVC33-150	GVC33-160	GVC33-180	GVC33-200
Capacity GN Pans	pcs	5 x GN1/4	6 x GN1/4	7 x GN1/4	7 x GN1/4	8 x GN1/4	10 x GN1/4
Lid No & Type							
Temperature Range	°C	+2 to +8					
Climate Class		4	4	4	4	4	4
Gross / Net Weight	kg	29 / 25	31.5 / 27	33 / 29	34.5 / 30	37 / 32	39 / 34
Gross / Net Volume	I	31 / 26	38.5 / 31	42.2 / 36.4	45.9 / 36.4	53.2 / 41.6	60.6 / 52
Feet / Legs		Adjustable feet					
Exterior Finish		SS201	SS201	SS201	SS201	SS201	SS201
Interior Finish		SS201	SS201	SS201	SS201	SS201	SS201
Interior Light		No	No	No	No	No	No
Type of Controller		Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Type of Cooling		Static	Static	Static	Static	Static	Static
Type of Defrost		Manual	Manual	Manual	Manual	Manual	Manual
Refrigerant		R600a	R600a	R600a	R600a	R600a	R600a
Refrigerant Charge	g	45	45	45	45	45	45
Thermometer		Yes	Yes	Yes	Yes	Yes	Yes
Max Ambient		30°C at 55% RH					
Energy Consumption	kWh/24h	2,64	2,64	2,64	2,64	2,93	2,93
Annual Energy Cons.	kWh/year	964	964	964	964	1069	1069
Power Supply		13 Amp					
Input Power	W	110	110	110	110	122	122
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	40	40	40	40	40	40
Internal Dimension (WxDxH)	mm	850 x 245 x 150	1050 x 245 x 150	1150 x 245 x 150	1250 x 245 x 150	1450 x 245 x 150	1650 x 245 x 150
External Dimension (WxDxH)	mm	1200 x 335 x 448	1400 x 335 x 448	1500 x 335 x 448	1600 x 335 x 448	1800 x 335 x 448	2000 x 335 x 448
Packed Dimension (WxDxH)	mm	1300 x 375 x 280	1500 x 375 x 280	1600 x 375 x 280	1700 x 375 x 280	1900 x 375 x 280	2100 x 375 x 280
40ft Container Load	pcs	324	270	258	252	222	198

COUNTERS I 262

GVC33 Vitrine Coolers - Stainless Steel Lid



GVC33-120 S/S Vitrine Cooler GN1/4



- Stainless steel
- Stairliess steel
- Accepts GN1/4 pans (Not supplied)
- Digital controller and temperature display
- Static cooling
- · Adjustable feet





Accepts GN1/4 pan(s) (not supplied)



Stainless steel lid for protection of food

Description

The GVC-S/S range of vitrine coolers is a great addition to gastro counters, as it enables you to have everything you need for food preparation within reach. It accepts GN1/4 and GN1/6 pans (not included). The cooler is made in SS201 stainless steel with a steel lid to protect the food. Ideal for pizza places, fast food restaurants, and sandwich shops.



(X)



GVC33-150 S/S

Vitrine Cooler GN1/4

- Stainless steel
- Stainless steel lid
- Accepts GN1/4 pan(s) (not supplied)
- Digital controller and temperature display
- Static cooling
- Adjustable feet

GVC33-180 S/S

Vitrine Cooler GN1/4



- Stainless steel lid
- Stainless steel
- Accepts GN1/4 pan(s) (not supplied)
- Digital controller and temperature display
- Static cooling
- Adjustable feet

Let No & Type Temperature Range			GVC33-120 S/S	GVC33-140 S/S	GVC33-150 S/S	GVC33-160 S/S	GVC33-180 S/S	GVC33-200 S/S
Temperature Range °C +2 to +8 Climate Class 4	Capacity GN Pans	pcs	5 x GN1/4	6 x GN1/4	7 x GN1/4	7 x GN1/4	8 x GN1/4	10 x GN1/4
Climate Class	Lid No & Type							
Gross / Net Weight kg 29 / 25 31.5 / 27 33 / 29 34.5 / 30 37 / 32 42.5 / 37 Gross / Net Volume I 31 / 26 38.5 / 31 42.2 / 36.4 45.9 / 36.4 53.2 / 41.6 60.6 / 52 Feet / Legs - Adjustable feet Adjustable feet <td>Temperature Range</td> <td>°C</td> <td>+2 to +8</td>	Temperature Range	°C	+2 to +8					
Gross / Net Volume I 31 / 26 38.5 / 31 42.2 / 36.4 45.9 / 36.4 53.2 / 41.6 60.6 / 52 Feet / Legs Adjustable feet Adjus	Climate Class		4	4	4	4	4	4
Adjustable feet	Gross / Net Weight	kg	29 / 25	31.5 / 27	33 / 29	34.5 / 30	37 / 32	42.5 / 37
Exterior Finish SS201	Gross / Net Volume	I	31 / 26	38.5 / 31	42.2 / 36.4	45.9 / 36.4	53.2 / 41.6	60.6 / 52
SS201 SS20	Feet / Legs		Adjustable feet					
No	Exterior Finish		SS201	SS201	SS201	SS201	SS201	SS201
Flectronic Fle	Interior Finish		SS201	SS201	SS201	SS201	SS201	SS201
Type of Cooling Static Manual Manual Manual Manual Manual Manual Manual Manual Ref00a Re600a Re600a <t< td=""><td>Interior Light</td><td></td><td>No</td><td>No</td><td>No</td><td>No</td><td>No</td><td>No</td></t<>	Interior Light		No	No	No	No	No	No
Type of Defrost Manual Manual <t< td=""><td>Type of Controller</td><td></td><td>Electronic</td><td>Electronic</td><td>Electronic</td><td>Electronic</td><td>Electronic</td><td>Electronic</td></t<>	Type of Controller		Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Refrigerant R600a	Type of Cooling		Static	Static	Static	Static	Static	Static
Refrigerant Charge g 45	Type of Defrost		Manual	Manual	Manual	Manual	Manual	Manual
Thermometer Yes Yes <th< td=""><td>Refrigerant</td><td></td><td>R600a</td><td>R600a</td><td>R600a</td><td>R600a</td><td>R600a</td><td>R600a</td></th<>	Refrigerant		R600a	R600a	R600a	R600a	R600a	R600a
Max Ambient 30°C at 55% RH 20°B 20°B Annual Energy Cons. kWh/year 964 964 964 964 1069 1069 1069 1069 1069 1069 1069 1069 1069 1069 1069 1069 1069 1069 1069 1069 1069 1069 1069 220-240/50 220-240/50 220-240/50 22	Refrigerant Charge	g	45	45	45	45	45	45
Energy Consumption kWh/24h 2,64 2,64 2,64 2,64 2,64 2,64 2,93 2,93 Annual Energy Cons. kWh/year 964 964 964 1069 1069 Power Supply 13 Amp 13 Amp 13 Amp 13 Amp 13 Amp 13 Amp Input Power W 110 110 110 112 122 Voltage / Frequency V/Hz 220-240/50 220-240/50 220-240/50 220-240/50 220-240/50 220-240/50 220-240/50 220-240/50 40	Thermometer		Yes	Yes	Yes	Yes	Yes	Yes
Annual Energy Cons. kWh/year 964 964 964 964 1069 1069 Power Supply 13 Amp 14 Input Power W 110 110 110 110 122 122 Voltage / Frequency V/Hz 220-240/50 220-240/50 220-240/50 220-240/50 220-240/50 220-240/50 Noise Level dB(A) 40 40 40 40 40 40 40 40 40 40 Internal Dimension (WxDxH) mm 850 x 245 x 150 1050 x 245 x 150 1150 x 245 x 150 1250 x 245 x 150 1450 x 245 x 150 1650 x 245 x 150 External Dimension (WxDxH) mm 1200 x 335 x 288.5 1400 x 335 x 288.5 1500 x 335 x 288.5 1600 x 335 x 288.5 1800 x 335 x 288.5 2000 x 335 x 288.5 Packed Dimension (WxDxH) mm 1300 x 375 x 330 1500 x 375 x 330 1600 x 375 x 330 1900 x 375 x 330 2100 x 375 x 330	Max Ambient		30°C at 55% RH					
Power Supply 13 Amp 14 Amp 15 Amp 15 Amp 15 Amp 15 Amp 15 Amp 16 Amp 17 Amp 17 Amp 17 Amp 18	Energy Consumption	kWh/24h	2,64	2,64	2,64	2,64	2,93	2,93
Input Power W 110 110 110 110 122 122 Voltage / Frequency V/Hz 220-240/50 220-240/50 220-240/50 220-240/50 220-240/50 220-240/50 220-240/50 220-240/50 220-240/50 220-240/50 200-240/50 220-240	Annual Energy Cons.	kWh/year	964	964	964	964	1069	1069
Voltage / Frequency V/Hz 220-240/50 220-	Power Supply		13 Amp					
Noise Level dB(A) 40 40 40 40 40 40 40 40 40 40 40 40 40	Input Power	W	110	110	110	110	122	122
Internal Dimension (WxDxH) mm 850 x 245 x 150 1050 x 245 x 150 1150 x 245 x 150 1250 x 245 x 150 1450 x 245 x 150 1650 x 245 x 150 External Dimension (WxDxH) mm 1200 x 335 x 288.5 1400 x 335 x 288.5 1500 x 335 x 288.5 1600 x 335 x 288.5 1800 x 335 x 288.5 2000 x 335 x 288.5 Packed Dimension (WxDxH) mm 1300 x 375 x 330 1500 x 375 x 330 1600 x 375 x 330 1700 x 375 x 330 1900 x 375 x 330 2100 x 375 x 330	Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
External Dimension (WxDxH) mm 1200 x 335 x 288.5 1400 x 335 x 288.5 1500 x 335 x 288.5 1600 x 335 x 288.5 1800 x 335 x 288.5 2000 x 335 x 288.5 288.5 2000 x 335 x 2800 x 2000	Noise Level	dB(A)	40	40	40	40	40	40
Packed Dimension (WxDxH) mm 1300 x 375 x 330 1500 x 375 x 330 1600 x 375 x 330 1700 x 375 x 330 1900 x 375 x 330 2100 x 375 x 330	Internal Dimension (WxDxH)	mm	850 x 245 x 150	1050 x 245 x 150	1150 x 245 x 150	1250 x 245 x 150	1450 x 245 x 150	1650 x 245 x 150
	External Dimension (WxDxH)	mm	1200 x 335 x 288.5	1400 x 335 x 288.5	1500 x 335 x 288.5	1600 x 335 x 288.5	1800 x 335 x 288.5	2000 x 335 x 288.5
40ft Container Load pcs 324 270 258 252 222 198	Packed Dimension (WxDxH)	mm	1300 x 375 x 330	1500 x 375 x 330	1600 x 375 x 330	1700 x 375 x 330	1900 x 375 x 330	2100 x 375 x 330
	40ft Container Load	pcs	324	270	258	252	222	198

COUNTERS I 264

GVC38 Vitrine Coolers - Glass Top



GVC38-200 Vitrine Cooler GN1/3



- Glass structure for protection of food
- Accepts GN1/3 pans (Not supplied)
- Digital controller and temperature display
- Static cooling
- · Adjustable feet





Glass structure for protection of food



Accepts GN1/3 pan(s) (not supplied)

Description

The GVC38 range of vitrine coolers is a great addition to gastro counters, as it enables you to have everything you need for food preparation within reach. It accepts GN1/3, GN1/6 and GN1/2 pans (not included). The cooler is made in SS201 stainless steel with a glass sneezeguard to protect the food. Ideal for pizza places, fast food restaurants, and sandwich shops.



 $\langle X \rangle$



GVC38-120

Vitrine Cooler GN1/3

- Stainless steel
- Glass structure for protection of food
- Accepts GN1/3 pans (Not supplied)
- Digital controller and temperature display
- Static cooling
- Adjustable feet

GVC38-160

Vitrine Cooler GN1/3



- Stainless steel
- Glass structure for protection of food
- Accepts GN1/3 pans (Not supplied)
- Digital controller and temperature display
- Static cooling
- Adjustable feet


		CV630 130	6)(630,450	6)/630 460	6) (630, 400	CV(530, 300,
		GVC38-120	GVC38-150	GVC38-160	GVC38-180	GVC38-200
Capacity GN Pans	pcs	4 x GN1/3	6 x GN1/3	7 x GN1/3	8 x GN1/3	9 x GN1/3
Lid No & Type						
Temperature Range	°C	+2 to +8				
Climate Class		4	4	4	4	4
Gross / Net Weight	kg	31.5 / 28	35.5 / 31	37 / 32	39.5 / 35	42.5 / 37
Gross / Net Volume	1	38.8 / 28.4	52.6 / 42.6	57.1 / 49.7	66.3 / 56.8	75.4 / 63.9
Feet / Legs		Adjustable feet				
Exterior Finish		SS201	SS201	SS201	SS201	SS201
Interior Finish		SS201	SS201	SS201	SS201	SS201
Interior Light		No	No	No	No	No
Type of Controller		Electronic	Electronic	Electronic	Electronic	Electronic
Type of Cooling		Static	Static	Static	Static	Static
Type of Defrost		Manual	Manual	Manual	Manual	Manual
Refrigerant		R600a	R600a	R600a	R600a	R600a
Refrigerant Charge	g	45	45	45	45	45
Thermometer		Yes	Yes	Yes	Yes	Yes
Max Ambient		30°C at 55% RH				
Energy Consumption	kWh/24h	2,64	2,64	2,64	2,93	2,93
Annual Energy Cons.	kWh/year	964	964	964	1069	1069
Power Supply		13 Amp				
Input Power	W	110	110	110	122	122
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	40	40	40	40	40
Internal Dimension (WxDxH)	mm	850 x 305 x 150	1150 x 305 x 150	1250 x 305 x 150	1450 x 305 x 150	1650 x 305 x 150
External Dimension (WxDxH)	mm	1200 x 395 x 448	1500 x 395 x 448	1600 x 395 x 448	1800 x 395 x 448	2000 x 395 x 448
Packed Dimension (WxDxH)	mm	1300 x 435 x 280	1600 x 435 x 280	1700 x 435 x 280	1900 x 435 x 280	2100 x 435 x 280
40ft Container Load	pcs	270	216	210	186	168

COUNTERS I 266

GVC38 Vitrine Coolers - Stainless Steel Lid



GVC38-200 S/SVitrine Cooler GN1/3



- Stainless steel
- Accepts GN1/3 pans (Not supplied)
- Digital controller and temperature display
- Static cooling
- · Adjustable feet





Accepts GN1/3 pan(s) (not supplied)



Stainless steel lid for protection of food

Description

The GVC38-S/S range of vitrine coolers is a great addition to gastro counters, as it enables you to have everything you need for food preparation within reach. It accepts GN1/3, GN1/6 and GN1/2 pans (not included). The cooler is made in SS201 stainless steel with a steel lid to protect the food. Ideal for pizza places, fast food restaurants, and sandwich shops.



 $\langle \mathbf{X} \rangle$



GVC38-120 S/S

Vitrine Cooler GN1/3

- Stainless steel lid
- Stainless steel
- Accepts GN1/3 pans (Not supplied)
- Digital controller and temperature display
- Static cooling
- Adjustable feet

GVC38-160 S/S

Vitrine Cooler GN1/3



- Stainless steel lid
- Stainless steel
- Accepts GN1/3 pans (Not supplied)
- Digital controller and temperature display
- Static cooling
- Adjustable feet

		GVC38-120 S/S	GVC38-150 S/S	GVC38-160 S/S	GVC38-180 S/S	GVC38-200 S/S
Capacity GN Pans	pcs	4 x GN1/3	6 x GN1/3	7 x GN1/3	8 x GN1/3	9 x GN1/3
Lid No & Type						
Temperature Range	°C	+2 to +8				
Climate Class		4	4	4	4	4
Gross / Net Weight	kg	31.5 / 28	35.5 / 31	55 / 50	39.5 / 35	42.5 / 37
Gross / Net Volume	I	38.8 / 28.4	52.6 / 42.6	57.1 / 49.7	66.3 / 56.8	75.4 / 63.9
Feet / Legs		Adjustable feet				
Exterior Finish		SS201	SS201	SS201	SS201	SS201
Interior Finish		SS201	SS201	SS201	SS201	SS201
Interior Light		No	No	No	No	No
Type of Controller		Electronic	Electronic	Electronic	Electronic	Electronic
Type of Cooling		Static	Static	Static	Static	Static
Type of Defrost		Manual	Manual	Manual	Manual	Manual
Refrigerant		R600a	R600a	R600a	R600a	R600a
Refrigerant Charge	g	45	45	45	45	45
Thermometer		Yes	Yes	Yes	Yes	Yes
Max Ambient		30°C at 55% RH				
Energy Consumption	kWh/24h	2,64	2,64	2,64	2,93	2,93
Annual Energy Cons.	kWh/year	964	964	964	1069	1069
Power Supply		13 Amp				
Input Power	W	110	110	110	122	122
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	40	40	40	40	40
Internal Dimension (WxDxH)	mm	850 x 305 x 150	1150 x 305 x 150	1250 x 305 x 150	1450 x 305 x 150	1650 x 305 x 150
External Dimension (WxDxH)	mm	1200 x 395 x 288.5	1500 x 395 x 288.5	1600 x 395 x 288.5	1800 x 395 x 288.5	2000 x 395 x 288.5
Packed Dimension (WxDxH)	mm	1300 x 435 x 330	1600 x 435 x 330	1700 x 435 x 330	1900 x 435 x 330	2100 x 435 x 330
40ft Container Load	pcs	270	216	210	186	168


COUNTERS I 268


7 GASTRO TC Ice Makers











Ice cube dimensions

TC85

Ice Maker


- Cubed ice approx. 31x35x31mm (18 g)
- Production Capacity: 85 kg/24 h
- Storage Capacity: 40 kg
- Low energy air-cooled system
- Spray system produces individual clear ice cubes
- Self-contained ice machine with storage
- Ag+ easy to clean surfaces in the storage bin
- High quality SS304 stainless steel
- 4 Legs and 4 adjustable feet included
- Scoop for ice cubes included
- Built-in silent operating magnetic water pump
- Waste water drain pump for safe water drainage







Ice Maker



- Production Capacity: 26 kg/24 h
- Storage Capacity: 8 kg
- Low energy air-cooled system
- Spray system produces individual clear ice cubes
- Self-contained ice machine with storage
- Ag+ easy to clean surfaces in the storage bin
- High quality SS304 stainless steel
- 4 Legs and 4 adjustable feet included
- Scoop for ice cubes included
- Built-in silent operating magnetic water pump
- Waste water drain pump for safe water drainage



TC37

Ice Maker



- Cubed ice approx. 31x35x31mm (18 g)
- Production Capacity: 37 kg/24 h
- Storage Capacity: 16 kg
- Low energy air-cooled system
- Spray system produces individual clear ice cubes
- Self-contained ice machine with storage
- Ag+ easy to clean surfaces in the storage bin
- High quality SS304 stainless steel
- 4 Legs and 4 adjustable feet included
- Scoop for ice cubes included
- Waste water drain pump for safe water drainage
- Built-in silent operating magnetic water pump

<u> </u>							
		TC26	TC37	TC57	TC85		
Capacity Ice Production	kg/24h	26	37	57	85		
Capacity In Ice Container	kg	8	16	28	40		
Size of Ice Cubes	mm	31 x 35 x 31 (18g)					
Water Consumption	l/24h	100,8	115,2	115,2	144		
Climate Class		5	5	5	5		
Gross / Net Weight	kg	39 / 33.4	48 / 40	55.6 / 48.15	94 / 85		
Feet / Legs		4 adjustable feet and legs					
Exterior Finish		SS304	SS304	SS304	SS304		
Type of Controller		Electronic	Electronic	Electronic	Electronic		
Type of Cooling		Static	Static	Static	Static		
Refrigerant		R290	R290	R290	R290		
Refrigerant Charge	g	66	68	80	125		
Max Ambient		40°C at 40% RH					
Energy Consumption	kWh/24h	5,9	10,4	14,7	16,4		
Annual Energy Cons.	kWh/year	2154	3796	5366	5986		
Power Supply		13 Amp	13 Amp	13 Amp	13 Amp		
Input Power	W	350	520	650	1000		
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50		
External Dimension (WxDxH)	mm	390 x 515 x 640	500 x 580 x 690	500 x 580 x 800	738 x 600 x 822		
Packed Dimension (WxDxH)	mm	450 x 575 x 710	555 x 635 x 855	555 x 635 x 965	800 x 660 x 1000		
40ft Container Load	pcs	368	231	144	102		

CE MAKERS I 270



WBC 240Waste Bin Cooler



- Suitable for both 120 l and 240 l waste bins (not included)
- Stainless steel for easy cleaning and maintenance
- · Ramp for easy waste bin handling
- Electronic thermostat
- Automatic defrost
- Ventilated cooling



Top lid for easy waste disposal



Digital controller

Description

The WBC range of waste bin coolers is suitable for both 120 I and 240 I bins (not included). It is available in sizes for 1 or 2 bins. The waste is kept at temperatures fit for fresh produce and thus reduces the degradation of organic waste. It comes complete with a top lid for easy disposal and a ramp for easy handling of the waste bin. A hygienic solution for businesses such as supermarkets, professional kitchens and veterinarians.



WBC 480

Waste Bin Cooler



- Suitable for both 120 l and 240 l waste bins (not included)
- Stainless steel for easy cleaning and maintenance
- Ramp for easy waste bin handling
- Electronic thermostat
- Automatic defrost
- Ventilated cooling

		WBC 240	WBC 480
Door No & Type		1 hinged solid door	2 hinged solid doors
Shelves No & Type			
Temperature Range	°C	-2 to +8	-2 to +8
Climate Class		5	5
Gross / Net Weight	kg	150 / 140	198 / 188
Gross / Net Volume	I	540 / 120	1080 / 240
Exterior Finish		SS304	SS304
Interior Finish		SS304	SS304
Type of Controller		Electronic	Electronic
Type of Cooling		Ventilated	Ventilated
Type of Defrost		Automatic, electric	Automatic, electric
Refrigerant		R290	R290
Refrigerant Charge	g	50	80
Thermometer		Yes	Yes
Energy Consumption	kWh/24h	3,12	3,36
Annual Energy Cons.	kWh/year	1139	1226
Input Power	W	1250	1400
Voltage / Frequency	V/Hz	220-240/50	220-240/50
Noise Level	dB(A)	60	62
Internal Dimension (WxDxH)	mm	645 x 760 x 1100	1295 x 760 x 1100
External Dimension (WxDxH)	mm	1090 x 985 x 1280	1740 x 985 x 1280
Packed Dimension (WxDxH)	mm	1180 x 1080 x 1450	1830 x 1050 x 1450
40ft Container Load	pcs	21	12

BIN COOLERS I 272

7 GASTRO Uni-Drawers



Dual Temperature



Switchable Cooler / Freezer

DID YOU KNOW?

Our ambitions are high.
We want to grow and
aim to have the highest
customer satisfaction
in the market.



UD2-3

GN3/1 Uni-Drawer

- Two drawers individually switchable cooling/freezing
- Easily switchable between cooler and freezer
- Maximized storage space
- Ventilated cooling for fast pull-down and even temperature
- Suitable for GN pans (max. depth 150 mm)
- Automatic defrost
- Impressive storage space
- Maximum load capacity per drawer: 60 kg
- Maximum load capacity of table top: 240 kg



From fridge to freeze by the touch of one button



GN3/1 drawer

Description

The UD range of uni-drawers offers a flexible solution, where you can switch the drawers individually from cooling to freezing at the touch of a button. This is perfect when space is limited. Temperature range can be set from -21 to -18 degrees, or +1 to +4 degrees. It is available in two different widths, with 1 or 2 drawers. They are all dimensioned for GN canteens up to 150 mm deep. The top plate is designed to be able to withstand heavy appliances, such as deep fryers, ovens and the like.



UD1-2

GN2/1 Uni-Drawer



- Easily switchable between cooler and freezer
- Maximized storage space
- Suitable for GN pans (max. depth 150 mm)
- Ventilated cooling for fast pull-down and even temperature
- Automatic defrost
- Impressive storage space
- Maximum load capacity per drawer: 60 kg
- Maximum load capacity of table top: 240 kg



UD2-2

GN2/1 Uni-Drawer



- Two drawers individually switchable cooling/freezing
- Easily switchable between cooler and freezer
- Maximized storage space
- Suitable for GN pans (max. depth 150 mm)
- Ventilated cooling for fast pull-down and even temperature
- Automatic defrost
- Impressive storage space
- Maximum load capacity per drawer: 60 kg
- Maximum load capacity of table top: 240 kg

		UD1-2	UD1-3	UD2-2	UD2-3
Capacity GN Pans	pcs	2	3	4	6
Drawers	pcs	1	1	2	2
Temperature Range	°C	-21 to -18 /+ 1 to +4			
Climate Class		5	5	5	5
Gross / Net Weight	kg	82 / 72	105 / 90	125 / 113	154 / 131
Gross / Net Volume	I	78 / 51	116 / 77	179 / 102	265 / 154
Castors		4 wheels, 2 with brake			
Exterior Finish		SS304	SS304	SS304	SS304
Interior Finish		SS304	SS304	SS304	SS304
Type of Controller		Electronic	Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic	Automatic
Refrigerant		R290	R290	R290	R290
Refrigerant Charge	g	70	70	140	140
Thermometer		Yes	Yes	Yes	Yes
Energy Class		D	E	G	G
Energy Consumption	kWh/24h	4,85	6,05	9,07	10,17
Annual Energy Cons.	kWh/year	1770	2208	3311	3712
Input Power	W	240	270	460	500
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	54	54	54	54
Internal Dimension (WxDxH)	mm	675 x 565 x 205	1000 x 565 x 205	675 x 565 x 470	1000 x 565 x 470
External Dimension (WxDxH)	mm	905 x 700 x 600	1230 x 700 x 600	905 x 700 x 865	1230 x 700 x 865
Packed Dimension (WxDxH)	mm	980 x 770 x 740	1310 x 770 x 740	980 x 770 x 1000	1310 x 770 x 1000
40ft Container Load	pcs	90	72	60	48

INIDED COLINITEDS



UC5410 Under Counter GN1/1

- Stainless steel
- Automatic defrost
- Self-closing doors
- Adjustable legs
- Ventilated cooling









Strong castors as option

Description

The UC range of under counters is made for professional kitchens and have GN1/1 dimensioned shelves. The coolers are made in SS304 stainless steel and are available with 2-, 3- or 4 self-closing doors. A ventilated cooling system ensures a fast pull-down time and an even temperature. The temperature setting can be adjusted via the electronic thermostat. Also available in similar models with drawers instead of doors.





UC5210

Under Counter GN1/1

- Stainless steel
- Automatic defrost
- Self-closing doors
- Adjustable legs
- Ventilated cooling



UC5310

Under Counter GN1/1



- Stainless steel
- Automatic defrost
- Self-closing doors
- Adjustable legs
- Ventilated cooling

		UC5210	UC5310	UC5410	
Door No & Type		2 hinged self-closing doors	3 hinged self-closing doors	4 hinged self-closing doors	
Shelves No & Type		2 wire shelves white	3 wire shelves white	4 wire shelves white	
Shelf Color		White	White	White	
Shelf Dimensions		GN1/1	GN1/1	GN1/1	
Drawers	pcs	0	0	0	
Temperature Range	°C	-2 to +8	-2 to +8	-2 to +8	
Climate Class		4	4	4	
Gross / Net Weight	kg	95 / 82	135 / 125	160 / 150	
Gross / Net Volume	I	180 / 170	277 / 262	370 / 350	
Feet / Legs		4 adjustable legs	4 adjustable legs	6 adjustable legs	
Exterior Finish		SS304	SS304	SS304	
nterior Finish		SS304	SS304	SS304	
ype of Controller		Electronic	Electronic	Electronic	
ype of Cooling		Ventilated	Ventilated	Ventilated	
ype of Defrost		Automatic	Automatic	Automatic	
Refrigerant		R600a	R600a	R600a	
Refrigerant Charge	g	95	85	95	
Thermometer		Yes	Yes	Yes	
nergy Class		В	С	С	
Energy Consumption	kWh/24h	1,67	2,51	2,68	
Annual Energy Cons.	kWh/year	610	916	978	
nput Power	W	300	300	300	
/oltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	
loise Level	dB(A)	42	42	42	
nternal Dimension (WxDxH)	mm	902 x 530 x 389	1337 x 530 x 389	1772 x 530 x 389	
External Dimension (WxDxH)	mm	1360 x 700 x 670	1795 x 700 x 670	2230 x 700 x 670	
Packed Dimension (WxDxH)	mm	1405 x 750 x 720	1830 x 750 x 720	2260 x 750 x 720	
40ft Container Load	pcs	72	54	48	

INIDED COLINTEDS

GASTRO Under Counters w/Drawers



UC5480 Under Counter GN1/1

- Stainless steel
- Automatic defrost
- GN1/1 Drawers
- Adjustable legs
- Ventilated cooling







GN1/1 drawers

Strong castors as option

Description

The UC range of under counters is made for professional kitchens and have GN1/1 dimensioned drawers. The coolers are made in SS304 stainless steel and are available with 4-, 6- or 8 drawers. A ventilated cooling system ensures a fast pull-down time and an even temperature. The temperature setting can be adjusted via the electronic thermostat. Also available in similar models with doors instead of drawers.





UC5240

Under Counter GN1/1

- Stainless steel
- Automatic defrost
- GN1/1 Drawers
- Adjustable legs
- Ventilated cooling



UC5360

Under Counter GN1/1



- Stainless steel
- Automatic defrost
- GN1/1 Drawers
- Adjustable legs
- Ventilated cooling

		UC5240	UC5360	UC5480	
Door No & Type				·	
Shelves No & Type					
Drawers	pcs	4 GN1/1 drawers	6 GN1/1 drawers	8 GN1/1 drawers	
Temperature Range	°C	+2 to +8	+2 to +8	+2 to +10	
Climate Class		4	4	4	
Gross / Net Weight	kg	95 / 82	135 / 125	160 / 150	
Gross / Net Volume	I	180 / 170	277 / 262	370 / 350	
Feet / Legs		4 adjustable legs	4 adjustable legs	6 adjustable legs	
Exterior Finish		SS304	SS304	SS304	
Interior Finish		SS304	SS304	SS304	
Type of Controller		Electronic	Electronic	Electronic	
Type of Cooling		Ventilated	Ventilated	Ventilated	
Type of Defrost		Automatic	Automatic	Automatic	
Refrigerant		R600a	R600a	R600a	
Refrigerant Charge	g	85	85	95	
Thermometer		Yes	Yes	Yes	
Energy Class		С	С	С	
Energy Consumption	kWh/24h	2,15	2,51	2,68	
Annual Energy Cons.	kWh/year	785	916	978	
Input Power	W	300	300	300	
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	
Noise Level	dB(A)	42	42	42	
Internal Dimension (WxDxH)	mm	902 x 530 x 389	1337 x 530 x 389	1772 x 530 x 389	
External Dimension (WxDxH)	mm	1360 x 700 x 670	1795 x 700 x 670	2230 x 700 x 670	
Packed Dimension (WxDxH)	mm	1405 x 750 x 720	1830 x 750 x 720	2260 x 750 x 720	
40ft Container Load	pcs	72	54	48	

INDED COLINTEDS

Gastro - Upright Cabinets 505/1010






RK1010Upright Cooler

- Stainless steel
- Ventilated cooling
- Self-closing doors with a 105 degree stop
- Lock
- · Adjustable shelves
- · Strong wheels









Digital thermostat

Description

The RK range of upright coolers is created for professional kitchens and have adjustable shelves. It is made from high quality catering grade SS304 stainless steel and has strong wheels for mobility, which comes in handy in terms of cleaning. Ventilated cooling ensures that the content stays fresh and the temperature can be set on a digital thermostat.



RF505

Upright Freezer

- Reversible solid door
- Stainless steel
- Ventilated cooling
- Self-closing door with a 105 degree stop
- Adjustable shelves
- Strong wheels





RK505

Upright Cooler

- Reversible solid door
- Stainless steel
- Ventilated cooling
- Lock
- Self-closing door with a 105 degree stop
- Adjustable shelves
- Strong wheels



		RF1010	RF505	RK1010	RK505
		RFIUIU	RF505	RK1010	RK5U5
Door No & Type		2 hinged self-closing solid doors	1 hinged self-closing solid door	2 hinged self-closing solid doors	1 hinged self-closing solid doc
Shelves No & Type		6 wire shelves white	3 wire shelves white	6 wire shelves white	3 wire shelves white
Shelf Color		White	White	White	White
Shelf Dimensions		530 x 540 mm	530 x 540 mm	530 x 540 mm	530 x 540
Max load on Shelves	kg/m²	110	110	110	110
Temperature Range	°C	-24 to -18	-24 to -18	-2 to +8	-2 to +8
Climate Class		4	4	4	4
Gross / Net Weight	kg	194 / 189	145 / 135	184 / 179	132 / 127
Gross / Net Volume	1	976 / 900	466 / 429	976 / 900	466 / 429
Castors		4 wheels, 2 with brake	4 wheels, 2 with brake	4 wheels, 2 with brake	4 wheels, 2 with brake
Exterior Finish		SS304	SS304	SS304	SS304
Interior Finish		SS304	SS304	SS304	SS304
nterior Light		No	No	No	No
Lock		Yes	Yes	Yes	Yes
Type of Controller		Electronic	Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic	Automatic
Refrigerant		R290	R290	R290	R600a
Refrigerant Charge	g	145	100	150	90
Thermometer		Yes	Yes	Yes	Yes
Energy Class		D	D	С	С
Energy Consumption	kWh/24h	9,21	5,12	2,16	1,12
Annual Energy Cons.	kWh/year	3362	1869	788	409
nput Power	W	740	490	400	255
/oltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	45	45	45	45
nternal Dimension (WxDxH)	mm	1220 x 553 x 1386	560 x 553 x 1386	1220 x 553 x 1386	560 x 553 x 1386
External Dimension (WxDxH)	mm	1340 x 700 x 2010	680 x 700 x 2010	1340 x 700 x 2010	680 x 700 x 2010
Packed Dimension (WxDxH)	mm	1400 x 800 x 2150	750 x 800 x 2150	1400 x 800 x 2150	750 x 800 x 2150
10ft Container Load	pcs	22	48	22	48
Door Reversible	-	No	Yes	No	Yes

7 GASTRO

Gastro - Upright Cabinets 710





Pedal for opening the door



Digital thermostat

RK710X1

Upright Cooler GN2/1

- Stainless steel cabinet
- Controller with Bluetooth and NFC connectivity
- HACCP compliant data export
- Ventilated cooling
- Reversible solid door
- Self-closing door with a 105 degree stop
- Adjustable shelves GN2/1
- Maintenance free condenser
- Strong wheels
- Lock



Description

The RK-X range of upright coolers with 1 or 2 solid doors is created for professional kitchens and have adjustable shelves in GN2/1 dimensions. It is made from high quality catering grade SS304 stainless steel and has strong wheels for mobility. Ventilated cooling ensures that the content stays fresh and the temperature can be set on a digital thermostat, complete with Bluetooth for easy monitoring via an app.



RF710X1

Upright Freezer GN2/1

- Stainless steel cabinet
- Controller with Bluetooth and NFC connectivity
- HACCP compliant data export
- Ventilated cooling
- Self-closing doors
- Adjustable shelves GN2/1
- Maintenance free condenser
- Strong wheels
- Lock





RK710G

Upright Cooler GN2/1

- Self-closing door with a 105 degree stop
- Stainless steel exterior and interior
- Ventilated cooling
- Lock
- Adjustable shelves GN2/1
- Strong wheels
- Accessory Pedal for opening door (right or left hinged)



		RF710X1	RK710G	RK710X1
Door No & Type		1 hinged self-closing solid door	1 hinged self-closing glass door	1 hinged self-closing solid doo
Shelves No & Type		3 wire shelves grey	3 wire shelves white	3 wire shelves grey
Shelf Color		Grey	White	Grey
Shelf Dimensions		530x650	GN2/1	530x650
Max load on Shelves	kg/m²	25	196	25
Temperature Range	°C	-22 to -18	+2 to +10	-2 to +8
Climate Class		5	4	5
Gross / Net Weight	kg	147 / 138	148 / 143	143 / 134
Gross / Net Volume	I	559 / 408	520 / 484	559 / 408
Castors		4 castors	4 wheels, 2 with brake	4 castors
Exterior Finish		SS304	SS304	SS304
Interior Finish		SS304	SS304	SS304
Interior Light		LED	LED	LED
Lock		Yes	Yes	Yes
Type of Controller		Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic, electric	Automatic	Automatic-Off Cycle
Refrigerant		R290	R600a	R600a
Refrigerant Charge	g	130	95	90
Thermometer		Yes	Yes	Yes
Energy Class		В	В	A
Energy Consumption	kWh/24h	2,9	2,6	0,72
Annual Energy Cons.	kWh/year	1062	948	263
Input Power	W	380	315	100
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	48	48	46
nternal Dimension (WxDxH)	mm	533 x 700 x 1501	533 x 700 x 1396	533 x 700 x 1501
External Dimension (WxDxH)	mm	740 x 875 x 2090	740 x 850 x 2010	740 x 875 x 2090
Packed Dimension (WxDxH)	mm	760 x 905 x 2150	770 x 880 x 2070	760 x 905 x 2150
40ft Container Load	pcs	39	39	39
Door Reversible		Yes	No	Yes
Total Display Area	m²		0,71	

Gastro - 2-Door Upright Cabinets 1420





RK1420G

Upright Cooler GN2/1

- Stainless steel exterior and interior
- Ventilated cooling
- Lock
- Adjustable shelves GN2/1
- Strong wheels
- Self-closing doors with a 105 degree stop







Adjustable shelves

Digital thermostat

Description

The RK-G range of upright coolers with 1 or 2 glass doors is created for professional kitchens and have adjustable shelves in GN2/1 dimensions. It is made from high quality catering grade SS304 stainless steel and has strong wheels for mobility, which comes in handy in terms of cleaning. Ventilated cooling ensures that the content stays fresh and the temperature can be set on a digital thermostat.





RK1420X1

Upright Cooler GN2/1

- Stainless steel cabinet
- Controller with Bluetooth and NFC connectivity
- HACCP compliant data export
- Ventilated cooling
- Self-closing doors with a 105 degree stop
- Adjustable shelves GN2/1
- Maintenance free condenser
- Strong wheels
- Lock

RF1420X1

Upright Freezer GN2/1

- Stainless steel cabinet
- Controller with Bluetooth and NFC connectivity
- HACCP compliant data export
- Ventilated cooling
- Self-closing doors
- Adjustable shelves GN2/1
- Maintenance free condenser
- Strong wheels
- Lock



• Lock			• Lock	
		RF1420X1	RK1420G	RK1420X1
Door No & Type		2 hinged self-closing solid doors	2 hinged self-closing glass doors	2 hinged self-closing solid doors
Shelves No & Type		6 wire shelves grey	6 wire shelves white	6 wire shelves grey
Shelf Color		Grey	White	Grey
Shelf Dimensions		530x650	GN2/1	530x650
Max load on Shelves	kg/m²	25	196	25
Temperature Range	°C	-22 to -18	+2 to +10	-2 to +8
Climate Class		5	4	5
Gross / Net Weight	kg	234 / 224	226 / 208	226 / 208
Gross / Net Volume	I	1300 / 954	1410 / 1325	1300 / 954
Castors		Castors	4 wheels, 2 with brake	4 castors
Exterior Finish		SS304	SS304	SS304
Interior Finish		SS304	SS304	SS304
Interior Light		LED	LED	LED
Lock		Yes	Yes	Yes
Type of Controller		Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic, electric	Automatic	Automatic-Off Cycle
Refrigerant		R290	R290	R600a
Refrigerant Charge	g	150	150	110
Thermometer		Yes	Yes	Yes
Energy Class		В	C	A
Energy Consumption	kWh/24h	4,83	4,67	1,27
Annual Energy Cons.	kWh/year	1763	1705	464
Input Power	W	480	320	360
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	48	48	47
Internal Dimension (WxDxH)	mm	1240 x 700 x 1501	1360 x 685 x 1396	1240 x 700 x 1501
External Dimension (WxDxH)	mm	1420 x 875 x 2090	1480 x 850 x 2010	1420 x 875 x 2090
Packed Dimension (WxDxH)	mm	1445 x 905 x 2150	1510 x 880 x 2070	1445 x 905 x 2150
40ft Container Load	pcs	16	15	16
Door Reversible		Yes	No	Yes
Total Display Area	m²		1,42	





Gastro - Fish & Snack Cabinets









Fish trays with SS304 bottom shelf



Castors with and without brake

RKS600

Fish Cooler

- Designed for fish
- Stainless steel
- Reversible solid door
- Static cooling
- Self-closing door with a 105 degree stop
- Adjustable shelves
- Strong wheels



Description

The RKS range of upright fish coolers is created for professional kitchens and is ideal for optimum storage of fish and seafood. It comes with 7 fish trays with stainless steel risers. The cabinet is made from high quality catering grade SS304 stainless steel and has strong wheels for mobility, which comes in handy in terms of cleaning.



RF500SNACK

Snack Freezer

- Reversible solid door
- Stainless steel
- Static cooling
- Lock
- Self-closing door with a
- 105 degree stop
- Adjustable shelves
- Adjustable feet





RK500SNACK

Snack Cooler

- Self-closing door with a 105 degree stop
- Reversible solid door
- Stainless steel
- Lock
- Adjustable shelves
- Adjustable feet



		RF500SNACK	RK500SNACK	RKS600
Door No & Type		1 hinged solid door	1 hinged solid door	1 hinged self-closing solid door
helves No & Type		3 wire shelves white	3 wire shelves white	7 fish trays 400x600
helf Color		White	White	-
helf Dimensions		530 x 540	530 x 540	-
lax load on Shelves	kg/m²	110	110	110
emperature Range	°C	-24 to -10	-2 to +8	-6 to +8
mate Class		4	4	4
oss / Net Weight	kg	145 / 135	140 / 130	145 / 135
oss / Net Volume	I	450 / 429	450 / 429	560 / 507
et / Legs		4 adjustable feet	4 adjustable feet	
stors				4 wheels, 2 with brake
terior Finish		SS304	SS304	SS304
erior Finish		SS304	SS304	SS304
erior Light		No	No	No
<		Yes	Yes	Yes
e of Controller		Electronic	Electronic	Electronic
e of Cooling		Static	Fan assisted	Static
of Defrost		Manual	Automatic	Manual
gerant		R290	R600a	R600a
gerant Charge	g	100	90	85
mometer		Yes	Yes	Yes
gy Class		D	С	
Ambient		30°C at 55% RH	30°C at 55% RH	30°C at 55% RH
y Consumption	kWh/24h	5,12	1,12	1,19
ial Energy Cons.	kWh/year	1869	409	434
er Supply		13 Amp	13 Amp	13 Amp
ut Power	W	490	353	353
tage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
se Level	dB(A)	42	42	42
rnal Dimension (WxDxH)	mm	560 x 553 x 1380	560 x 553 x 1380	560 x 653 x 1396
ernal Dimension (WxDxH)	mm	680 x 700 x 1900	680 x 700 x 1900	680 x 810 x 2010
ked Dimension (WxDxH)	mm	715 x 745 x 2135	745 x 720 x 2130	715 x 840 x 2050
ft Container Load	pcs	48	48	39
or Reversible		Yes	Yes	Yes

7 GASTRO

Gastro - Upright Bakery Freezers







Strong castors



Guides for Bakery trays

BF8501

Upright Freezer

- Euronorm cupboard
- Guides for 600x400 / 600x800 bakery trays
- Accepts 54 x 5ltr Napoli pans (pans not supplied)
- Reversible self-closing door
- Stainless steel 304
- Internal LED light
- Ventilated cooling
- · Strong wheels
- Lock



Description

The BF850I freezer is optimized for bakeries as well as for storing ice cream. It has euronorm dimensions with guides for bakery trays. Yet, it also comes with shelves accommodating up to 54 Napoli pans (not included). A ventilated cooling system ensures that the ingredients stay fresh, and the temperature is easily controlled by a digital thermostat.



BF850

Upright Bakery Freezer

- Reversible solid door
- Stainless steel
- Euronorm cupboard
- Ventilated cooling
- Lock
- Self-closing door
- Guides for 600x400 / 600x800 bakery trays
- Strong wheels





BK850

Upright Bakery Cooler

- Reversible solid door
- Stainless steel
- Euronorm cupboard
- Ventilated cooling
- Lock
- Self-closing door
- Guides for 600x400 / 600x800 bakery trays
- Strong wheels



		BF850	BF850I	BK850
Door No & Type		1 hinged self-closing solid door	1 hinged self-closing solid door	1 hinged self-closing solid door
Shelves No & Type		10 guides for bakery trays	9 wire shelves	10 guides for bakery trays
Max load on Shelves	kg/m²	110	110	110
Temperature Range	°C	-24 to -18	-24 to -18	-2 to +10
Climate Class		4	4	4
Gross / Net Weight	kg	161 / 143	161 / 143	161 / 143
Gross / Net Volume	1	850 / 737	850 / 737	850 / 737
Castors		4 wheels, 2 with brake	4 wheels, 2 with brake	4 wheels, 2 with brake
Exterior Finish		SS304	SS304	SS304
Interior Finish		SS304	SS304	SS304
Interior Light		LED	LED	LED
Lock		Yes	Yes	Yes
Type of Controller		Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic
Refrigerant		R290	R290	R290
Refrigerant Charge	g	115	115	100
Thermometer		Yes	Yes	Yes
Energy Class		D	D	C
Energy Consumption	kWh/24h	8,63	8,63	2,17
Annual Energy Cons.	kWh/year	3149	3149	790
Input Power	W	700	700	330
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	48	48	48
Internal Dimension (WxDxH)	mm	620 x 860 x 1397	620 x 860 x 1397	620 x 860 x 1397
External Dimension (WxDxH)	mm	740 x 990 x 2010	740 x 990 x 2010	740 x 990 x 2010
Packed Dimension (WxDxH)	mm	770 x 1020 x 2070	770 x 1020 x 2070	770 x 1020 x 2070
40ft Container Load	pcs	31	31	31
Door Reversible		Yes	Yes	Yes

GASTRO

UF Gastronorm Upright Freezers

TEFCOLD'S









Designed for GN1/1 pans, not supplied



Strong castors as option

UF600S

Storage Freezer GN2/1

- Stainless steel cabinet
- · Integrated handle
- · Reversible solid door
- · Electronic thermostat
- · Fixed freezing shelves
- Adjustable feet with rollers to rear



Description

The UF-S range of storage freezers is the stainless steel version of our UF cabinets. They offer high quality and reliability at a competitive prize. It comes in varioussizes that all have a clean design with an integrated full-length door handle. The standard freezer cabinet comes with fixed freezing shelves, which helps ensure an even temperature throughout the cabinet. Set the temperature on the easy-to-use digital thermostat display.

UF600

Storage Freezer GN2/1

- Integrated handle
- Reversible solid door
- Electronic thermostat
- Fixed freezing shelves
- Adjustable feet with rollers to rear
- Digital temperature display





UF600 W/BASKETS

Storage Freezer

- Includes baskets
- Integrated handle
- Reversible solid door
- Electronic thermostat
- Fixed freezing shelves
- Adjustable feet with rollers to rear
- Digital temperature display



		UF550	UF600	UF600 W/BASKETS	UF600S	UF700V	UF700VS
Door No & Type		1 hinged solid door	1 hinged solid door	1 hinged solid door	1 hinged solid door	1 hinged solid door	1 hinged solid door
Door Reversible		Yes	Yes	Yes	Yes	Yes	Yes
Shelves No & Type		6 fixed freezing shelves	6 fixed freezing GN2/1	6 fixed freezing GN2/1	6 fixed freezing GN2/1	3 wire shelves white	3 wire shelves white
Shelf Dimensions		GN2/1	GN2/1	GN2/1	GN2/1	GN2/1	GN2/1
Max load on Shelves	kg/m²	110	110	110	110	110	110
Temperature Range	°C	-24 to -10	-24 to -10	-24 to -10	-24 to -10	-24 to -10	-24 to -10
Climate Class		4	4	4	4	4	4
Gross / Net Weight	kg	101 / 94	112 / 107	112 / 107	112 / 107	122 / 113	122 / 113
Gross / Net Volume		461 / 420	605 / 555	605 / 555	605 / 555	641 / 440	641 / 440
Feet / Legs		2 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet	2 adjustable feet	2 adjustable feet
Castors		2 rollers	2 rollers	2 rollers	2 rollers	2 rollers	2 rollers
Exterior Finish		White	White	White	SS430	White	SS430
Interior Finish		White ABS	White ABS	White ABS	White ABS	White ABS	White ABS
Interior Light		No	No	No	No	No	No
Lock		Yes	Yes	Yes	Yes	Yes	Yes
Type of Controller		Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Type of Cooling		Static	Static	Static	Static	Ventilated	Ventilated
Type of Defrost		Manual	Manual	Manual	Manual	Electric	Automatic
Refrigerant		R600a	R600a	R600a	R600a	R290	R290
Refrigerant Charge	g	130	130	130	130	110	110
Thermometer		Yes	Yes	Yes	Yes	Yes	Yes
Energy Class						С	С
Max Ambient		30°C at 55% RH	30°C at 55% RH	30°C at 55% RH	30°C at 55% RH	30°C at 55% RH	30°C at 55% RH
Energy Consumption	kWh/24h	2,24	2,24	2,24	2,24	4,65	4,65
Annual Energy Cons.	kWh/year	818	818	818	818	1697	1697
Power Supply		13 Amp	13 Amp	13 Amp	13 Amp	13 Amp	13 Amp
Input Power	W	190	190	190	190	540	540
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	45	45	45	45	45	45
Internal Dimension (WxDxH)	mm	667 x 570 x 1485	653 x 580 x 1680	653 x 580 x 1680	653 x 580 x 1680	653 x 581 x 1660	653 x 581 x 1660
External Dimension (WxDxH)	mm	777 x 715 x 1720	777 x 695 x 1895	777 x 695 x 1895	777 x 695 x 1895	777 x 730 x 1970	777 x 730 x 1970
Packed Dimension (WxDxH)	mm	850 x 770 x 1900	850 x 770 x 2070	850 x 770 x 2070	850 x 770 x 2070	840 x 760 x 2120	840 x 760 x 2120
40ft Container Load	pcs	42	42	42	42	42	42

GASTRO

UR Gastronorm Upright Coolers









Internal fan



Strong castors as option

UR600G

Display Cooler GN2/1

- New design
- · Hinged glass door
- Electronic thermostat
- · Reversible door
- Adjustable shelves
- · LED interior light
- Fan assisted cooling





792

477

480

Description

The UR-G range of coolers is the white glass door version of our UR cabinets. These display coolers come in various sizes and offers great product visibility through a reversible glass door. The cooler has adjustable shelves, making it easy to customize the cabinet to fit your needs. Fan assisted cooling ensures a stabile temperature throughout the cabinet, which is easily controlled by an electronic thermostat.

UR550

Storage Cooler

- Integrated handle
- Reversible solid door
- Electronic thermostat
- Fan assisted cooling
- Adjustable shelves
- Lock
- Digital controller and temperature display
- Adjustable feet with rollers to rear





UR550S

Storage Cooler

- Stainless steel cabinet
- Integrated handle
- Reversible solid door
- Electronic thermostat
- Fan assisted cooling
- Adjustable shelvesLock
- Adjustable feet with rollers to rear
- Digital controller and temperature display



		UR550	UR550S	UR600G	UR600SG
Total Display Area	m²			0,91	0,91
Door No & Type		1 hinged solid door	1 hinged solid door	1 hinged glass door	1 hinged glass door
Door Reversible		Yes	Yes	Yes	Yes
Shelves No & Type		4 wire shelves white			
Shelf Color		White	White	White	White
Shelf Dimensions		GN2/1	GN2/1	GN2/1	GN2/1
Bottom Shelf Dimensions		650 x 305	650 x 305	650 x 305	650 x 305
Max load on Shelves	kg/m²	110	110	196	196
Temperature Range	°C	+2 to +10	+2 to +10	+2 to +10	+2 to +10
Climate Class		4	4	4	4
Gross / Net Weight	kg	97 / 90	97 / 90	112 / 107	112 / 107
Gross / Net Volume	I	461 / 420	461 / 420	605 / 570	605 / 570
Feet / Legs		2 adjustable feet	2 adjustable feet	4 adjustable feet	4 adjustable feet
Castors		2 rollers	2 rollers	2 rollers	2 rollers
Exterior Finish		White	SS430	White	SS430
Interior Finish		White ABS	White ABS	White ABS	White ABS
Interior Light		No	No	LED	LED
Lock		Yes	Yes	Yes	Yes
Type of Controller		Electronic	Electronic	Electronic	Electronic
Type of Cooling		Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost		Automatic	Automatic	Automatic	Automatic
Refrigerant		R600a	R600a	R600a	R600a
Refrigerant Charge	g	95	95	100	100
Thermometer		Yes	Yes	Yes	Yes
Energy Class		С	C	В	В
Max Ambient		30°C at 55% RH			
Energy Consumption	kWh/24h	1,71	1,71	2,25	2,25
Annual Energy Cons.	kWh/year	624	624	820	820
Power Supply		13 Amp	13 Amp	13 Amp	13 Amp
Input Power	W	130	130	130	130
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	45	45	45	45
Internal Dimension (WxDxH)	mm	667 x 570 x 1485	667 x 570 x 1485	653 x 580 x 1680	653 x 580 x 1680
External Dimension (WxDxH)	mm	777 x 715 x 1720	777 x 715 x 1720	777 x 695 x 1895	777 x 695 x 1895
Packed Dimension (WxDxH)	mm	850 x 770 x 1890	850 x 770 x 1890	850 x 770 x 2070	850 x 770 x 2070
40ft Container Load	pcs	42	42	42	42

7 GASTRO G-Line Counters

DID YOU KNOW?

G-line is our value-formoney gastro range, crafted in SS201 stainless steel.



GC73

Counter Cooler GN1/1

- Great value-for-money range
- Stainless steel
- Automatic defrost
- Self-closing doors
- Removable table top with splashback
- Adjustable legs
- Ventilated cooling









Drawers available as seperate kit

Description


The value-for-money G-line counter cooler is designed with GN1/1 dimensioned cupboards and is a perfect fit for gastronorm pans. It is made in stainless steel and is a great option for professional kitchens. It comes with adjustable shelves and legs for optimal flexibility.



D G

GF72

Counter Freezer GN1/1



- Freezing unit
- Stainless steel
- Ventilated cooling
- Automatic defrost
- Self-closing doors
- Removable table top with splashback
- Adjustable legs



GC72

Counter Cooler GN1/1



- Great value-for-money range
- Stainless steel
- Automatic defrost
- Self-closing doors
- Removable table top with splashback
- Adjustable legs
- Ventilated cooling

		GC72	GC73	GF72
Door No & Type		2 hinged self-closing doors	3 hinged self-closing doors	2 hinged self-closing doors
Shelves No & Type		2 wire shelves white	3 wire shelves white	2 wire shelves white
Shelf Color		White	White	White
Shelf Dimensions		GN1/1	GN1/1	GN1/1
Temperature Range	°C	-2 to +10	-2 to +10	-20 to -10
Climate Class		4	4	4
Gross / Net Weight	kg	104 / 94	151 / 134	104 / 94
Gross / Net Volume	I	282 / 272	417 / 402	282 / 272
Feet / Legs		4 adjustable legs	4 adjustable legs	4 adjustable legs
Exterior Finish		SS201	SS201	SS201
Interior Finish		SS201	SS201	SS201
Type of Controller		Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic
Refrigerant		R600a	R600a	R290
Refrigerant Charge	g	95	95	90
Thermometer		Yes	Yes	Yes
Energy Class		В	В	D
Energy Consumption	kWh/24h	1,98	2,45	6,95
Annual Energy Cons.	kWh/year	723	894	2537
Power Supply		13 Amp	13 Amp	
Input Power	W	300	300	470
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	42	42	42
Internal Dimension (WxDxH)	mm	902 x 530 x 589	1337 x 530 x 589	902 x 530 x 589
External Dimension (WxDxH)	mm	1360 x 700 x 960	1795 x 700 x 960	1360 x 700 x 980
Packed Dimension (WxDxH)	mm	1405 x 750 x 1010	1830 x 750 x 1010	1405 x 750 x 1010
40ft Container Load	pcs	48	38	48

G-Line Pizza Tables & Saladettes




GP93

Pizza Counter GN1/1

- Great value-for-money range
- Granite worktop
- Automatic defrost
- Doors
- Adjustable feet
- Stainless steel cabinet
- Fan assisted cooling









Easy access to clean dust filter

Description


G-line value-for-money pizza counter with granite tabletop. Ideal for creating pizzas, as the granite table top stays cool and makes it harder for the dough to stick to the table top. The counter well at the top accepts GN pans in size 1/6 and the cupboards have GN1/1 dimensions.





GP92

Pizza Counter GN1/1



- Granite worktop
- Automatic defrost
- Adjustable feet
- Stainless steel cabinet
- Fan assisted cooling

GS91

(**X**

Saladette Counter GN1/1



- Great value-for-money range
- Automatic defrost
- Adjustable shelves GN1/1
- Adjustable feet
- Stainless steel cabinet
- Fan assisted cooling

		GP92	GP93	GS91	GS92
Door No & Type		2 hinged solid doors	3 hinged solid doors	2 hinged solid doors	2 hinged solid doors
Shelves No & Type		2 wire shelves white	3 wire shelves white	2 wire shelves white	2 wire shelves white
Shelf Color		White	White	White	White
Shelf Dimensions		GN1/1	GN1/1	GN1/1	GN1/1
Temperature Range	°C	+2 to +10	+2 to +10	+2 to +10	+2 to +10
Climate Class		4	4	4	4
Gross / Net Weight	kg	111 / 101	166 / 156	77 / 67	77 / 67
Gross / Net Volume	I	260 / 230	400 / 368	260 / 225	260 / 225
Feet / Legs		4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Exterior Finish		SS201	SS201	SS201	SS201
Interior Finish		SS201	SS201	SS201	SS201
Type of Controller		Electronic	Electronic	Electronic	Electronic
Type of Cooling		Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost		Automatic	Automatic	Automatic	Automatic
Refrigerant		R600a	R600a	R600a	R600a
Refrigerant Charge	g	70	110	68	68
Thermometer		Yes	Yes	Yes	Yes
Energy Class				C	
Max Ambient		30°C at 55% RH			
Energy Consumption	kWh/24h	2,2	2,4	3,12	2,4
Annual Energy Cons.	kWh/year	803	876	1139	876
Power Supply		13 Amp	13 Amp	13 Amp	
Input Power	W	230	175	155	155
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	42	42	42	42
Internal Dimension (WxDxH)	mm	830 x 515 x 500	1295 x 515 x 500	830 x 515 x 526	830 x 515 x 526
External Dimension (WxDxH)	mm	900 x 700 x 1100	1365 x 700 x 1100	900 x 700 x 877	900 x 700 x 877
Packed Dimension (WxDxH)	mm	980 x 770 x 1250	1440 x 770 x 1250	980 x 770 x 1040	980 x 770 x 1040
40ft Container Load	pcs	72	48	72	72

G-Line Pizza Tables & Saladettes



GSS435

Saladette Counter GN1/1

- Great value-for-money range
- Stainless steel cabinet
- Adjustable shelves
- Suitable for GN pans (not included)
- Automatic defrost
- Adjustable feet
- Fan assisted cooling
- · Self-closing doors









Stainless steel lid for protection of food

Description

The G-line saladette counters are perfect for busy kitchen environments with 1/1 gastronorm dimensioned cupboards and adjustable shelves. They offer great value for money.

The saladette well accepts GN-pans in sizes 1/6, 1/3, and 1/9.





GS91

Saladette Counter GN1/1

- Great value-for-money range
- Automatic defrost
- Adjustable shelves GN1/1
- Adjustable feet
- Stainless steel cabinet
- Fan assisted cooling

GS92

Saladette Counter GN1/1



- Great value-for-money range
- Polypropylene chopping board
- Suitable for GN pans (not included)
- Automatic defrost
- Adjustable shelves GN1/1
- Adjustable feet
- Stainless steel cabinet
- Fan assisted cooling

		GS91	GS92	GSS20	GSS435
Door No & Type		2 hinged solid doors	2 hinged solid doors	2 hinged solid doors	3 hinged solid doors
Shelves No & Type		2 wire shelves white	2 wire shelves white	2 wire shelves white	3 wire shelves white
Shelf Color		White	White	White	White
Shelf Dimensions		GN1/1	GN1/1	GN1/1	GN1/1
Temperature Range	°C	+2 to +10	+2 to +10	+2 to +10	+2 to +10
Climate Class		4	4	4	4
Gross / Net Weight	kg	77 / 67	77 / 67	90 / 80	128 / 118
Gross / Net Volume	I	260 / 225	260 / 225	228 / 201	348 / 320
Feet / Legs		4 adjustable feet	4 adjustable feet	4 adjustable feet	4 adjustable feet
Exterior Finish		SS201	SS201	Stainless steel	Stainless steel
Interior Finish		SS201	SS201	Stainless Steel	Stainless Steel
Type of Controller		Electronic	Electronic	Electronic	Electronic
Type of Cooling		Fan assisted	Fan assisted	Fan assisted	Fan assisted
Type of Defrost		Automatic	Automatic	Automatic	Automatic
Refrigerant		R600a	R600a	R600a	R600a
Refrigerant Charge	g	68	68	68	110
Thermometer		Yes	Yes	Yes	Yes
Energy Class		C			
Max Ambient		30°C at 55% RH	30°C at 55% RH		
Energy Consumption	kWh/24h	3,12	2,4	2	2,4
Annual Energy Cons.	kWh/year	1139	876	730	876
Power Supply		13 Amp			
Input Power	W	155	155	155	175
Voltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Noise Level	dB(A)	42	42	42	42
Internal Dimension (WxDxH)	mm	830 x 515 x 526	830 x 515 x 526	830 x 515 x 500	1295 x 515 x 500
External Dimension (WxDxH)	mm	900 x 700 x 877	900 x 700 x 877	900 x 700 x 950	1365 x 700 x 950
Packed Dimension (WxDxH)	mm	980 x 770 x 1040	980 x 770 x 1040	980 x 770 x 1170	1400 x 770 x 1170
40ft Container Load	pcs	72	72	72	48

G-Line Upright Cabinets






GUC140

Upright Cooler GN2/1

- Stainless steel cabinet
- Ventilated cooling
- Digital controller and temperature display
- Lock
- Self-closing doors
- Adjustable shelves GN2/1
- Strong wheels
- Great value-for-money range









Ventilated cooling

Description

The G-line upright cooler is designed for busy kitchen environments. It has strong wheels for flexibility and a stainless steel exterior for high durability. It has adjustable shelving and accepts GN2/1 gastronorm pans. A great value-formoney product.



GUC70

Upright Cooler GN2/1

- Stainless steel cabinet
- Reversible solid door
- Ventilated cooling
- Digital controller and temperature display
- Lock
- Self-closing door
- Adjustable shelves GN2/1
- Strong wheels
- Great value-for-money range





GUF70

Upright Freezer GN2/1

- Great value-for-money range
- Reversible solid door
- Stainless steel cabinet
- Ventilated cooling
- Lock
- Self-closing door
- Adjustable shelves GN2/1
- Strong wheels



		GUC140	GUC70	GUF140	GUF70
Door No & Type		2 hinged self-closing solid doors	1 hinged self-closing solid door	2 hinged self-closing solid doors	1 hinged self-closing solid doo
Shelves No & Type		6 wire shelves	3 wire shelves	6 wire shelves	3 wire shelves
Shelf Color		White	White	White	White
Shelf Dimensions		GN2/1	GN2/1	GN2/1	GN2/1
Max load on Shelves	kg/m²	110	110	110	110
Temperature Range	°C	+2 to +8	+2 to +8	-24 to -18	-24 to -18
Climate Class		4	4	4	4
Gross / Net Weight	kg	160 / 140	145 / 120	160 / 140	145 / 120
Gross / Net Volume	I	1166 / 1056	565 / 528	1166 / 1056	565 / 528
Castors		4 wheels, 2 with brake	4 wheels, 2 with brake	4 wheels, 2 with brake	4 wheels, 2 with brake
Exterior Finish		SS201	SS201	SS201	SS201
nterior Finish		SS201	SS201	SS201	SS201
nterior Light		No	No	No	No
ock		Yes	Yes	Yes	Yes
ype of Controller		Electronic	Electronic	Electronic	Electronic
Type of Cooling		Ventilated	Ventilated	Ventilated	Ventilated
Type of Defrost		Automatic	Automatic	Automatic	Automatic
Refrigerant		R290	R290	R290	R290
Refrigerant Charge	g	150	90	145	90
Thermometer		Yes	Yes	Yes	Yes
nergy Class		С	C	D	D
Max Ambient				30°C at 55% RH	30°C at 55% RH
nergy Consumption	kWh/24h	1,68	1,22	8,25	5,83
Annual Energy Cons.	kWh/year	613	445	3011	2128
nput Power	W	320	255	730	565
/oltage / Frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
loise Level	dB(A)	45	45	45	45
nternal Dimension (WxDxH)	mm	1220 x 680 x 1380	560 x 680 x 1380	1220 x 680 x 1380	560 x 680 x 1380
external Dimension (WxDxH)	mm	1340 x 845 x 2000	680 x 845 x 2000	1340 x 845 x 2000	680 x 845 x 2000
Packed Dimension (WxDxH)	mm	1400 x 880 x 2070	720 x 880 x 2050	1400 x 880 x 2070	720 x 880 x 2050
10ft Container Load	pcs	21	42	21	42
Door Reversible		No	Yes	No	Yes

LOOK FOR THESE SYMBOLS

To make it easier for you to find the products that meet your requirements, we have added symbols as a guideline.

We have specified their meaning below.



NEW PRODUCT

The product has been launched recently.



SUITABLE FOR DAIRY PRODUCTS

The product has a temperature range that is suitable for storing dairy products.



SUITABLE FOR FRESH FISH

The product has a temperature range that is suitable for storing fresh fish.



SUITABLE FOR FRESH MEAT

The product has a temperature range that is suitable for storing fresh meat.



COOLER OPTION AVAILABLE

The freezer with this symbol is also available in a similar cooler model.



FREEZER OPTION AVAILABLE

The cooler with this symbol is also available in a similar freezer model.



SWITCHABLE COOLER / FREEZER

The product can be used as a cooler or freezer. You can switch between the two options.



DUAL TEMPERATURE

The product has two temperature zones.



The product has an alarm installed to let you know that the temperature is too high.



LOCK

The product has a lock and keys.



SITE SURVEY

Please make sure site has been correctly surveyed both for access (door size/steps etc.), that the area for the unit is big enough, and that there is a suitable electrical supply.



SPECIAL INSTALLATION

In addition to site survey, the product requires special installation such as assembly.



LEFT HINGED DOOR

The product has a left-hinged door as standard.



RIGHT HINGED DOOR

The product has a right-hinged door as standard.



PHARMACY MEDICAL CABINET

The product is suitable for storing pharmaceuticals.

REFRIGERATION AND TEMPERATURE GUIDE

REFRIGERATION GUIDE

ACCESS

Prior to purchase, ensure the dimensions of your new unit fit to the space you have available. Ensure you can get the unit to its final position and through any doors or restrictions.

SERVEOVER DISPLAYS, GLASS DISPLAY, ICE CREAM SERVEOVERS

Food should only be displayed during the working day and placed into chilled or frozen storage overnight.

PLACEMENT OF REFRIGERATION *

Display chillers and freezers should not be placed in direct sunlight. Open top displays and open multi-decks should not be placed in positions where draughts occur, (open doors, windows or in direct line of air conditioning). Do not position your refrigeration unit adjacent to direct heat sources such as radiators, cookers, ovens, fryers.

SAVING ENERGY

If fitted, night-blinds should be used on multi-decks when not in use. Doors and lids should be kept closed as much as possible and lights in display units turned off when not required. Rear shutters and blinds on ice cream conservators and serve-overs should also be closed when not in use to help maintain temperature and reduce energy consumption. Where applicable condensers on units should be kept clean to ensure maximum efficiency and reduce the chance of break down.



TEMPERATURE GUIDE

BOTTLED DRINKS AND BEERS +1/+10°C

There is no specific temperature for bottled drinks and beers but below 10°C is certainly recommended. Lagers taste better if they are served colder, around 4°C is most peoples preference, some prefer even colder and we have some specialist units that will go down to zero or lower.

WHITE WINES (+4/+10°C) & RED WINES (+14/+18°C)

There is no specific temperature for the serving of white wine. The general recommendation is +8/+10°C for quality wines and down to 4°C for cheaper or sweet white wines. Red wine should be stored at between +14 and +16°C to keep its quality. You will often find that wine fridges have tinted door glass and dim lights inside. This is as light can cause oxidisation and degrading of the wine.

PRE-CHILLED FOOD +1/+4°C

For correct storage, produce including dairy products are recommended to be kept in temperatures ranging from $\pm 1/\pm 4^{\circ}$ C.

FRESH MEAT -2/0°C

The preferred temperature for the storage of fresh meat products is between -2 and 0°C. Not only for health, safety and hygiene but also at this temperature the blood in meats does not run, so creates less mess.

FRESH FISH -1/+1°C

Fresh fish should be kept at -1/+1°C. Specific fridges must be used for fresh fish storage. Fresh fish gives off ammonia so stainless steel refrigerators with specially coated refrigeration parts are required.

ICE CREAM AND GELATO -14/-23°C

There is no specified temperature for ice cream. Serving temperatures range from -14 to -20°C for efficient scooping of the ice cream. Storage temperatures are lower at around -22°C. Many TEFCOLD ice cream freezers have a large temperature range, to accommodate many different types of product.

FROZEN FOOD -18/-22°C

It is recommended to keep frozen products between -18/-22°C although some ice cream can be kept at -14°C for ease of serving. We also supply more specialist chest freezers that go as low as -45°C.

BLAST CHILLERS AND FREEZERS

Guidelines state that the temperature of the food should be reduced from $+70^{\circ}$ C to $+3^{\circ}$ in 90 minutes, or from $+70^{\circ}$ C to -18° C in 240 minutes. Times are for guidance as water content, surface area and weight will change chilling and freezing times.

Be aware that guidelines and legislation might vary in different countries. For more information, please consult with local food and health authorities. Cabinets sold by TEFCOLD are designed for the storage and/or display of food. It is the responsibility of the operator to ensure food is stored and served according to all relevant legislation.

THERE IS MORE

Visit www.tefcold.com to see our vast selection of coolers and freezers.





TEFCOLD A/S

Industrivej 25 8800 Viborg Denmark

T: +45 8660 1933 E: sales@tefcold.com tefcold.com

TEFCOLD FR

3, 5 rue Saint Georges 75009 Paris France

T: + 33 4 76 65 00 92 E: i nfo@tefcold.fr tefcold.fr

TEFCOLD CZ s.r.o.

Logistics area P3 Ostrava Central, hall L1, Vítkovice 3046, 703 00 Ostrava Czech Republic

T: +420 593 033 028
E: vo@tefcold.com
tefcold.cz

TEFCOLD Iberia

Fluvià, 65 08019- Barcelona Spain

T: +34 935 245 074
E: comercial@tefcold.es
tefcold.es

TEFCOLD *

TEFCOLD BE

LICHTENBERGLAAN 1023 3800 Sint-Truiden Belgium

T: + 32 (0) 11 / 782 698 E: r eceptie@topcold.be tefcold.be

TEFCOLD UK Ltd

West Meadow Rise Castle Donington Derby | DE74 2HL | UK

T: +44 (0) 1332 850090 E: sales@tefcold.co.uk tefcold.co.uk

TEFCOLD SK s.r.o.

Vlčie hrdlo 50 821 07 Bratislava Slovakia

T: +421 911 770 462 E: elektro@tefcold.com tefcold.sk

EUREKA Kühltechnik GmbH

Nickelweg 5 48282 Emsdetten Germany

T: +49 (0)2572-9554-0 E: info@eureka-emsdetten.de tefcold.de

Serrco BV

Oude Kerkstraat 12b 4878 AA Etten-Leur Netherlands

T: +31(0)76 541 85 30 E: info@serrco.nl